


Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

### HVIC


High Voltage Integrated Circuit  
600 Volts/ $\pm 2$  Amperes

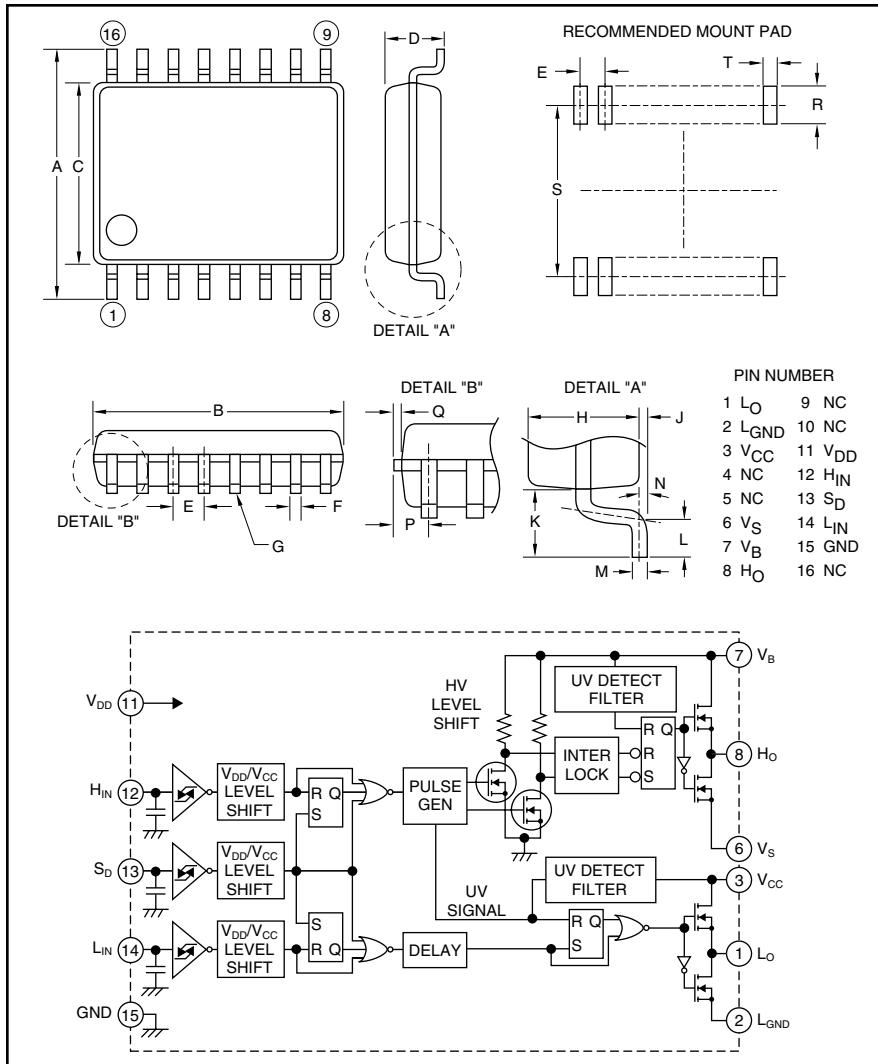

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	0.31±0.01	7.8±0.3
B	0.41±0.004	10.1±0.1
C	0.21±0.004	5.3±0.1
D	0.12	2.10
E	0.05	1.27
F	0.02±0.002	0.4±0.05
G	0.004	0.1
H	0.07	1.8
J	0.01±0.004	0.1±0.1

Dimensions	Inches	Millimeters
K	0.05	1.25
L	0.024±0.008	0.6±0.2
M	0.1±0.002	0.2±0.05
N	4°±4°	4°±4°
P	0.03 Max.	0.755 Max.
Q	0.006	0.15
R	0.05 Min.	Min. 1.27
S	0.30	7.62
T	0.029	0.76

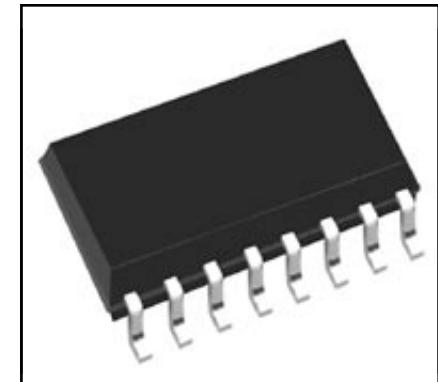

### Description:

M81702FP is a high voltage Power MOSFET and IGBT module driver for half-bridge applications.

### Features:

- Floating Supply Voltage
- Output Current
- Half-Bridge Driver
- SOP-16

### Applications:

- HID
- PDP
- MOSFET Driver
- IGBT Driver
- Inverter Module Control

### Ordering Information:

M81702FP is a  $\pm 2$  Ampere, 600 Volt HVIC, High Voltage Integrated Circuit

**M81702FP**


**HVIC, High Voltage Integrated Circuit**  
600 Volts/ $\pm 2$  Amperes

**Absolute Maximum Ratings,  $T_a = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	M81702FP	Units
High Side Floating Supply Absolute Voltage	$V_B$	-0.5 ~ 624	Volts
High Side Floating Supply Offset Voltage	$V_S$	-0.5 ~ 600	Volts
High Side Floating Supply Voltage ( $V_{BS} = V_B - V_S$ )	$V_{BS}$	-0.5 ~ 24	Volts
Allowable Offset Supply Voltage Minus Surge ( $P_W < 1\mu\text{s}$ )	$-V_S$	-5	Volts
High Side Output Voltage	$V_{HO}$	$V_S - 0.5 \sim V_B + 0.5$	Volts
Low Side Fixed Supply Voltage	$V_{CC}$	-0.5 ~ 24	Volts
Low Side Output Voltage	$V_{LO}$	-0.5 ~ $V_{CC} + 0.5$	Volts
Logic Supply Voltage	$V_{DD}$	-0.5 ~ 24	Volts
Logic Input Voltage ( $H_{IN}, L_{IN}$ )	$V_{IN}$	-0.5 ~ $V_{DD} + 0.5$	Volts
Shutdown Input Voltage	$S_D$	-0.5 ~ $V_{DD} + 0.5$	Volts
Low Side Return Offset Voltage ( $V_{CC} - L_{GND} < 24\text{V}$ )	$L_{GND}$	-5 ~ $V_{CC} + 0.5$	Volts
Allowable Offset Supply Voltage Transient	$dV/dt$	$\pm 50$	V/ns
Package Power Dissipation ( $T_a = 25^\circ\text{C}$ , On Board)	$P_d$	0.88	Watts
Linear Derating Factor ( $T_a > 25^\circ\text{C}$ , On Board)	$K_\theta$	-8.8	mW/ $^\circ\text{C}$
Junction to Case Thermal Resistance	$R_{th(j-c)}$	50	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_j$	-20 ~ 125	$^\circ\text{C}$
Operation Temperature	$T_{opr}$	-20 ~ 75	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ 125	$^\circ\text{C}$

**Recommended Operating Conditions**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
High Side Floating Supply Absolute Voltage	$V_B$		$V_S + 10$	—	$V_S + 20$	Volts
High Side Floating Supply Offset Voltage	$V_S$		0	—	500	Volts
High Side Floating Supply Voltage	$V_{BS}$	$V_{BS} = V_B - V_S$	10	—	20	Volts
Low Side Fixed Supply Voltage	$V_{CC}$		10	—	20	Volts
Logic Supply Voltage	$V_{DD}$		5	—	20	Volts
Logic Input Voltage	$V_{IN}$	$H_{IN}, L_{IN}$	0	—	$V_{DD}$	Volts
Shutdown Input Voltage	$S_D$		0	—	$V_{DD}$	Volts
Low Side Return Offset Voltage	$L_{GND}$		-5	—	5	Volts

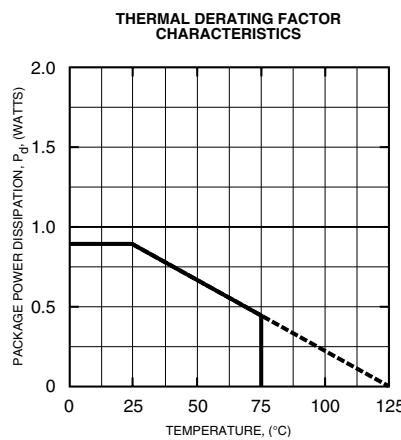



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**M81702FP**

**HVIC, High Voltage Integrated Circuit**

**600 Volts/ $\pm 2$  Amperes**

## Electrical Characteristics

**$T_a = 25^\circ\text{C}$ ,  $V_{CC} = V_{BS} (= V_B - V_S) = V_{DD} = 15\text{V}$ ,  $I_{GND} = 0\text{V}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Floating Supply Leakage Current	$I_{FS}$	$V_B = V_S = 600\text{V}$	—	—	1	$\mu\text{A}$
$V_{BS}$ Standby Current	$I_{BS}$		—	0.4	0.7	$\text{mA}$
$V_{CC}$ Standby Current	$I_{CC}$		—	0.75	1.5	$\text{mA}$
$V_{DD}$ Standby Current	$I_{DD}$		—	—	10	$\mu\text{A}$
High Level Output Voltage	$V_{OH}$	$I_O = 0\text{A}$ , $L_O$ , $H_O$	13.8	14.4	—	Volts
Low Level Output Voltage	$V_{OL}$	$I_O = 0\text{A}$ , $L_O$ , $H_O$	—	—	0.1	Volts
High Level Input Threshold Voltage	$V_{IH15}$	$H_{IN}$ , $L_{IN}$	—	8.4	9.5	Volts
Low Level Input Threshold Voltage	$V_{IL15}$	$H_{IN}$ , $L_{IN}$	6.0	6.8	—	Volts
High Level Input Threshold Voltage	$V_{IH5}$	$H_{IN}$ , $L_{IN}$ ( $V_{DD} = 5\text{V}$ )	—	3.1	4.1	volts
Low Level Input Threshold Voltage	$V_{IL5}$	$H_{IN}$ , $L_{IN}$ ( $V_{DD} = 5\text{V}$ )	1.4	2.4	—	Volts
Shutdown High Level Input Threshold Voltage	$V_{ISDH15}$	$S_D$	—	8.4	9.5	Volts
Shutdown Low Level Input Threshold Voltage	$V_{ISDL15}$	$S_D$	6.0	6.8	—	Volts
Shutdown High Level Input Threshold Voltage	$V_{ISDH5}$	$S_D$ ( $V_{DD} = 5\text{V}$ )	—	3.1	4.1	Volts
Shutdown Low Level Input Threshold Voltage	$V_{ISDL5}$	$S_D$ ( $V_{DD} = 5\text{V}$ )	1.4	2.4	—	Volts
High Level Input Bias Current	$I_{IH}$	$V_{IN} = 15\text{V}$	—	75	150	$\mu\text{A}$
Low Level Input Bias Current	$I_{IL}$	$V_{IN} = 0\text{V}$	—	—	1.0	$\mu\text{A}$
$V_{BS}$ Supply UV Reset Voltage	$V_{BSUvr}$		7.5	8.6	9.7	Volts
$V_{BS}$ Supply UV Hysteresis Voltage	$V_{BSUvh}$		0.1	0.4	0.7	Volts
$V_{BS}$ Supply UV Filter Time	$t_{VBSUv}$		—	10	—	$\mu\text{s}$
$V_{CC}$ Supply UV Reset Voltage	$V_{CCUvr}$		7.5	8.6	9.7	Volts
$V_{CC}$ Supply UV Hysteresis Voltage	$V_{CCUvh}$		0.1	0.4	0.7	Volts
$V_{CC}$ Supply UV Filter Time	$t_{VCCUv}$		—	10	—	$\mu\text{s}$
Output High Level Short Circuit Pulsed Current	$I_{OH}$	$V_O = 0\text{V}$ , $V_{IN} = 15\text{V}$ , $P_W < 10\mu\text{s}$	—	-2.5	—	Amperes
Output Low Level Short Circuit Pulsed Current	$I_{OL}$	$V_O = 15\text{V}$ , $V_{IN} = 0\text{V}$ , $P_W < 10\mu\text{s}$	—	2.5	—	Amperes
Output High Level ON Resistance	$R_{OH}$	$I_O = -200\text{mA}$ , $R_{OH} = (V_{OH} - V_O)/I_O$	—	10	13	$\Omega$
Output Low Level ON Resistance	$R_{OL}$	$I_O = 200\text{mA}$ , $R_{OL} = V_O/I_O$	—	2.5	3	$\Omega$
High Side Turn-On Propagation Delay	$t_{dLH}(HO)$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	350	ns
High Side Turn-Off Propagation Delay	$t_{dHL}(HO)$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	330	ns
High Side Turn-On Rise Time	$t_{rH}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	60	ns
High Side Turn-Off Fall Time	$t_{fH}$	$C_L = 1000\text{pF}$ between $H_O - V_S$	—	—	30	ns
Low Side Turn-On Propagation Delay	$t_{dLH}(LO)$	$C_L = 1000\text{pF}$ between $L_O - GND$	—	—	350	ns
Low Side Turn-Off Propagation Delay	$t_{dHL}(LO)$	$C_L = 1000\text{pF}$ between $L_O - GND$	—	—	330	ns
Low Side Turn-On Rise Time	$t_{rL}$	$C_L = 1000\text{pF}$ between $L_O - GND$	—	—	60	ns
Low Side Turn-Off Fall Time	$t_{fL}$	$C_L = 1000\text{pF}$ between $L_O - GND$	—	—	30	ns
Delay Matching, High Side and Low Side Turn-On	$\Delta t_{dLH}$	$ t_{dLH}(HO) - t_{dLH}(LO) $	—	—	30	ns
Delay Matching, High Side and Low Side Turn-Off	$\Delta t_{dHL}$	$ t_{dHL}(HO) - t_{dHL}(LO) $	—	—	30	ns
Shutdown Propagation Delay	$t_{SD}$	$C_L = 1000\text{pF}$ between $H_O - V_S$ , $C_L = 1000\text{pF}$ between $L_O - GND$	—	—	350	ns

M81702FP

HVIC, High Voltage Integrated Circuit

600 Volts/ $\pm 2$  Amperes

### FUNCTION TABLE (X: H or L)

HIN	LIN	VBS UV	Vcc UV	HO	LO	SD	Behavioral State
L	L	H	H	L	L	L	LO = OFF, HO = OFF
L	H	H	H	L	H	L	LO = ON, HO = OFF
H	L	H	H	H	L	L	LO = OFF, HO = ON
H	H	H	H	H	H	L	LO = ON, HO = ON
X	L	L	H	L	L	L	LO = OFF, HO = OFF, VBS UV tripped
X	H	L	H	L	H	L	LO = ON, HO = OFF, VBS UV tripped
L	X	H	L	L	L	L	LO = OFF, HO = OFF, VCC UV tripped
H	X	H	L	L	L	L	LO = OFF, HO = OFF, VCC UV tripped
X	X	H	H	L	L	H	LO = OFF, HO = OFF, SD = ON


Note : "L" state of VBS UV and VCC UV means that UV trip voltage.

### TIMING DIAGRAM

#### 1. Input/Output Timing Diagram

When input signal ( $H_{IN}$  or  $L_{IN}$ ) is "H", then output signal (HO or LO) is "H".


Both input signals ( $H_{IN}$  and  $L_{IN}$ ) are "H", then output signal (HO or LO) becomes "H".

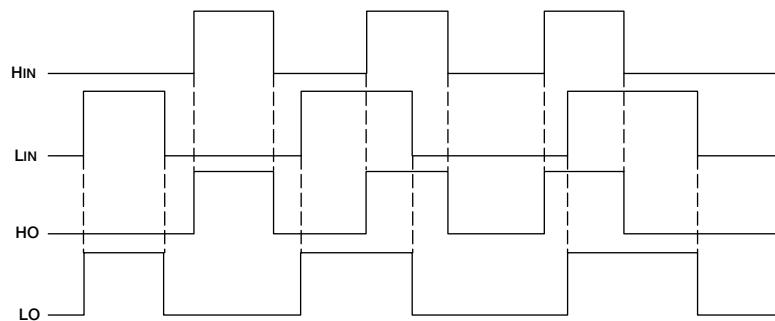


#### 2. Shutdown Input Timing Diagram

When shutdown input signal (SD) is "H", then output signals (HO and LO) are "L".

Output signals (HO and LO) keep "L" by shutdown input signal (SD) is "L" until next input signal ( $H_{IN}$  or  $L_{IN}$ ) is "H".

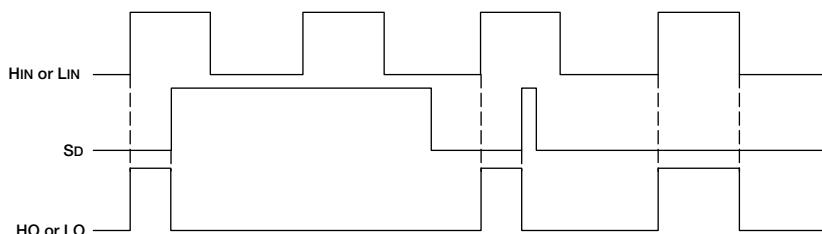

#### 3. Vcc (VBS) Supply Under Voltage Lockout Timing Diagram

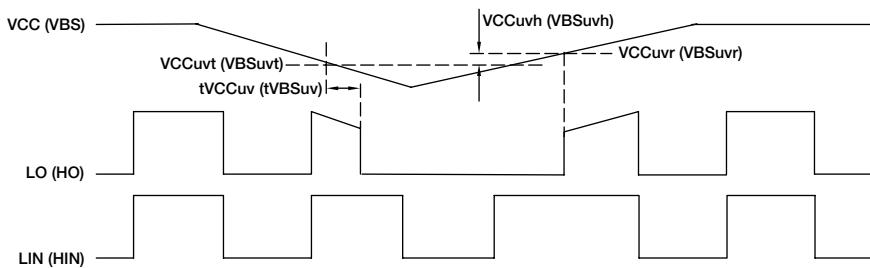

#### 4. Allowable Supply Voltage Transient

Allowable high side floating supply voltage (VBS) transient or low side fixed supply voltage (Vcc) transient are below 50V/ $\mu$ s.  
In case VBS or Vcc are started more than 50V/ $\mu$ s, output signal (HO or LO) may be "H".