

# 128M - 8M x 16 bit Synchronous DRAM (SDRAM)

Confidential (Rev. 2, Feb. /2014)

## **Features**

• Fast access time from clock: 5/5.4 ns

Fast clock rate: 166/143 MHzFully synchronous operation

Internal pipelined architecture

• 2M word x 16-bit x 4-bank

Programmable Mode registers

- CAS Latency: 2, or 3

- Burst Length: 1, 2, 4, 8, or full page

- Burst Type: Sequential or Interleaved

- Burst stop function

Auto Refresh and Self Refresh

• 4096 refresh cycles/64ms

CKE power down mode

• Single +3.3V  $\pm$  0.3V power supply

• Interface: LVTTL

Operating temperature range

- Commercial (0 ~ 70°C)

- Industrial (-40 ~ 85°C)

- Automotive A2 (-40 ~ 105°C)

• 54-pin 400 mil plastic TSOP II package

54-ball 8.0 x 8.0 x 1.2mm (max) FBGA package
 All parts ROHS Compliant

# Overview

The 128Mb SDRAM is a high-speed CMOS synchronous DRAM containing 128 Mbits. It is internally configured as 4 Banks of 2M word x 16 DRAM with a synchronous interface (all signals are registered on the positive edge of the clock signal, CLK). Read and write accesses to the SDRAM are burst oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. Accesses begin with the registration of a BankActivate command which is then followed by a Read or Write command.

The SDRAM provides for programmable Read or Write burst lengths of 1, 2, 4, 8, or full page, with a burst termination option. An auto precharge function may be enabled to provide a self-timed row precharge that is initiated at the end of the burst sequence. The refresh functions, either Auto or Self Refresh are easy to use. By having a programmable mode register, the system can choose the most suitable modes to maximize its performance. These devices are well suited for applications requiring high memory bandwidth and particularly well suited to high performance PC applications.

**Table 1. Key Specifications** 

	<b>AS</b> 4C16M16S	-6/7
tCK3	Clock Cycle time (min.)	6/7 ns
tAC3	Access time from CLK (max.)	5.4/5.4 ns
tRAS	Row Active time (min.)	42/42 ns
tRC	Row Cycle time (min.)	60/63 ns

**Table 2. Ordering Information** 

Part Number	Frequency	Package
AS4C8M16S-7TCN	143 MHz	54 pin TSOP II
AS4C8M16S-6TCN	166 MHz	54 pin TSOP II
AS4C8M16S-6TIN	166 MHz	54 pin TSOP II
AS4C8M16S-6BIN	166 MHz	54 ball TFBGA
AS4C8M16S-7BCN	143 MHz	54 ball TFBGA
AS4C8M16S-6TAN	166 MHz	54 pin TSOP II

T: indicates TSOP II package

B: indicates TFBGA package

N: indicates Pb free and Halogen free - ROHS compliant parts

C: Commercial I: Industrial A: Automotive temperatures



Figure 1.1 Pin Assignment (Top View)


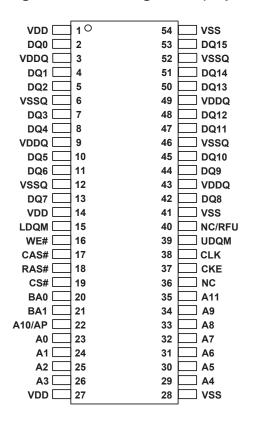


Figure 1.2 Ball Assignment (Top View)

	1	2	3	•••	7	8	9
Α	vss	DQ15	VSSQ		VDDQ	DQ0	VDD
В	DQ14	DQ13	VDDQ		VSSQ	DQ2	DQ1
С	DQ12	DQ11	VSSQ		VDDQ	DQ4	DQ3
D	DQ10	DQ9	VDDQ		VSSQ	DQ6	DQ5
Ε	DQ8	NC	vss		VDD	LDQM	DQ7
F	UDQM	CLK	CKE		CAS#	RAS#	WE#
G	NC	<b>A11</b>	(A9)		BA0	BA1	CS#
Н	(A8)	(A7)	<b>A6</b>		(A0)	(A1)	(A10)
J	vss	(A5)	<b>A4</b>		(A3)	(A2)	VDD



Figure 2. Block Diagram

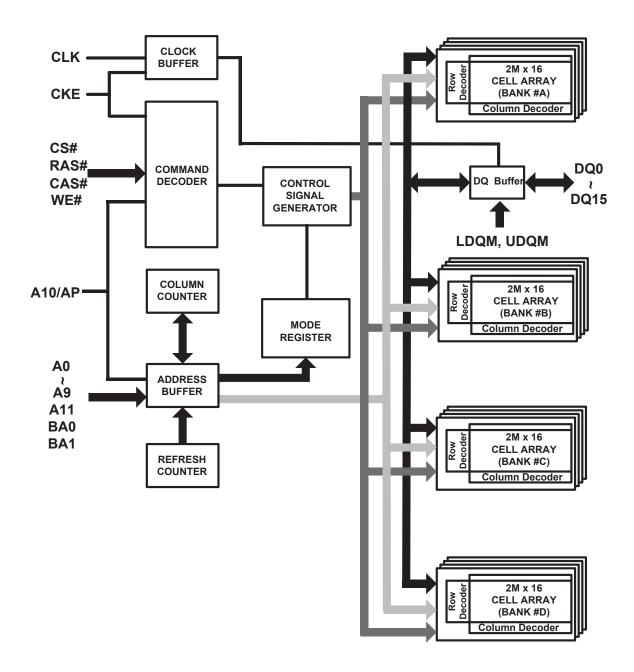



# **Pin Descriptions**

**Table 3. Pin Details** 

Symbol	Type		Description				
CLK	Input		<b>Clock:</b> CLK is driven by the system clock. All SDRAM input signals are sampled on the positive edge of CLK. CLK also increments the internal burst counter and controls the output registers.				
CKE	Input	Clock Enable: CKE activates (HIGH) and deactivates (LOW) the CLK signal. If CKE goes low synchronously with clock (set-up and hold time same as other inputs), the internal clock is suspended from the next clock cycle and the state of output and burst address is frozen as long as the CKE remains low. When all banks are in the idle state, deactivating the clock controls the entry to the Power Down and Self Refresh modes. CKE is synchronous except after the device enters Power Down and Self Refresh modes, where CKE becomes asynchronous until exiting the same mode. The input buffers, including CLK, are disabled during Power Down and Self Refresh modes, providing low standby power.					
BA0,BA1	Input	Bank Activate: BA0, BA1 inp	out select the bank for oper	ation.			
		BA1	BA0	Select Bank			
		0	0	BANK #A			
		0	1	BANK #B			
		1	1 0 BANK #C				
		1	1	BANK #D			
A0-A11	Input	Address Inputs: A0-A11 are sampled during the BankActivate command (row address A0-A11) and Read/Write command (column address A0-A8 with A10 defining Auto Precharge) to select one location out of the 2M available in the respective bank. During a Precharge command, A10 is sampled to determine if all banks are to be precharged (A10 = HIGH). The address inputs also provide the opcode during a Mode Register Set command.					
CS#	Input	Chip Select: CS# enables command decoder. All commprovides for external bank considered part of the comm	nands are masked when C selection on systems v	S# is sampled HIGH. CS#			
RAS#	Input	Row Address Strobe: The RAS# signal defines the operation commands in conjunction with the CAS# and WE# signals and is latched at the positive edges of CLK. When RAS# and CS# are asserted "LOW" and CAS# is asserted "HIGH," either the BankActivate command or the Precharge command is selected by the WE# signal. When the WE# is asserted "HIGH," the BankActivate command is selected and the bank designated by BA is turned on to the active state. When the WE# is asserted "LOW," the Precharge command is selected and the bank designated by BA is switched to the idle state after the precharge operation.					
CAS#	Input	Column Address Strobe: The CAS# signal defines the operation commands in conjunction with the RAS# and WE# signals and is latched at the positive edges of CLK. When RAS# is held "HIGH" and CS# is asserted "LOW," the column access is started by asserting CAS# "LOW." Then, the Read or Write command is selected by asserting WE# "LOW" or "HIGH."					
WE#	Input	Write Enable: The WE# significant with the RAS# and CAS# significant with the RAS# significant with the	inals and is latched at the p	positive edges of CLK. The			

Confidential 4 Rev. 2 Feb. /2014





LDQM, UDQM	Input	Data Input/Output Mask: Controls output buffers in read mode and masks Input data in write mode.
DQ0-DQ15	Input / Output	<b>Data I/O:</b> The DQ0-15 input and output data are synchronized with the positive edges of CLK. The I/Os are maskable during Reads and Writes.
NC/RFU	-	No Connect: These pins should be left unconnected.
V <sub>DDQ</sub>	Supply	DQ Power: Provide isolated power to DQs for improved noise immunity.
		( 3.3V± 0.3V )
Vssq	Supply	DQ Ground: Provide isolated ground to DQs for improved noise immunity.
		(OV)
V <sub>DD</sub>	Supply	Power Supply: +3.3V ± 0.3V
Vss	Supply	Ground

Confidential 5 Rev. 2 Feb. /2014



# **Operation Mode**

Fully synchronous operations are performed to latch the commands at the positive edges of CLK. Table 4 shows the truth table for the operation commands.

Table 4. Truth Table (Note (1), (2))

Command	State	CKE <sub>n-1</sub>	CKEn	DQM	BA0,1	A10	A0-9,11	CS#	RAS#	CAS#	WE#
BankActivate	Idle <sup>(3)</sup>	Н	Х	Х	V	Row	address	L	L	Н	Н
BankPrecharge	Any	Н	Х	Х	V	L	Х	L	L	Н	L
PrechargeAll	Any	Н	Х	Х	Х	Н	Х	L	L	Н	L
Write	Active <sup>(3)</sup>	Н	Х	V	V	L	Column	L	Н	L	L
Write and AutoPrecharge	Active <sup>(3)</sup>	Н	Х	V	V	Н	address (A0 ~ A8)	L	Н	L	L
Read	Active <sup>(3)</sup>	Н	Х	V	V	L	Column	L	Н	L	Н
Read and Autoprecharge	Active <sup>(3)</sup>	Н	Х	V	V	Н	address (A0 ~ A8)	L	Н	L	Н
Mode Register Set	Idle	Н	Х	Х		OP co	ode	L	L	L	L
No-Operation	Any	Н	Х	Х	Х	Х	Х	L	Н	Н	Н
Burst Stop	Active <sup>(4)</sup>	Н	Х	Х	Х	Х	Х	L	Н	Н	L
Device Deselect	Any	Н	Х	Х	Х	Х	Х	Н	Х	Х	Х
AutoRefresh	Idle	Н	Н	Х	Х	Х	Х	L	L	L	Н
SelfRefresh Entry	Idle	Н	L	Х	Х	Х	Х	L	L	L	Н
SelfRefresh Exit	Idle	L	Н	Х	Х	Х	Х	Н	Х	Х	Х
	(SelfRefresh)							L	Н	Н	Н
Clock Suspend Mode Entry	Active	Н	L	Х	Х	Х	Х	Н	Х	Х	Х
								L	V	V	V
Power Down Mode Entry	Any <sup>(5)</sup>	Н	L	Х	Х	Х	Х	Н	Х	Х	Х
								L	Н	Н	Н
Clock Suspend Mode Exit	Active	L	Н	Х	Х	Х	Х	Х	Х	Х	Х
Power Down Mode Exit	Any	L	Н	Х	Х	Х	Х	Н	Х	Х	Х
	(PowerDown)							L	Н	Н	Н
Data Write/Output Enable	Active	Н	Х	L	Х	Х	Х	Х	Х	Х	Х
Data Mask/Output Disable	Active	Н	Х	Н	Х	Х	Х	Х	Х	Х	Х

- Note: 1. V=Valid, X=Don't Care L=Low level H=High level
  - 2. CKEn signal is input level when commands are provided. CKE<sub>n-1</sub> signal is input level one clock cycle before the commands are provided.
  - 3. These are states of bank designated by BA signal.
  - 4. Device state is 1, 2, 4, 8, and full page burst operation.
  - 5. Power Down Mode can not enter in the burst operation. When this command is asserted in the burst cycle, device state is clock suspend mode.

Confidential Rev. 2 Feb. /2014 6



#### **Commands**

#### 0 BankActivate

(RAS# = "L", CAS# = "H", WE# = "H", Bas = Bank, A0-A11 = Row Address)

The BankActivate command activates the idle bank designated by the BA0, 1 signals. By latching the row address on A0 to A11 at the time of this command, the selected row access is initiated. The read or write operation in the same bank can occur after a time delay of t<sub>RCD</sub> (min.) from the time of bank activation. A subsequent BankActivate command to a different row in the same bank can only be issued after the previous active row has been precharged (refer to the following figure). The minimum time interval between successive BankActivate commands to the same bank is defined by t<sub>RC</sub> (min.). The SDRAM has four internal banks on the same chip and shares part of the internal circuitry to reduce chip area; therefore it restricts the back-to-back activation of the two banks. t<sub>RRD</sub> (min.) specifies the minimum time required between activating different banks. After this command is used, the Write command and the Block Write command perform the no mask write operation.

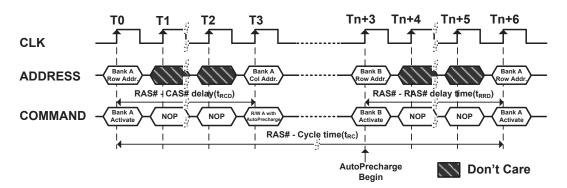


Figure 3. BankActivate Command Cycle (Burst Length = n)

#### 2 BankPrecharge command

(RAS# = "L", CAS# = "H", WE# = "L", Bas = Bank, A10 = "L", A0-A9 and A11 = Don't care)

The BankPrecharge command precharges the bank designated by BA signal. The precharged bank is switched from the active state to the idle state. This command can be asserted anytime after  $t_{RAS}(min.)$  is satisfied from the BankActivate command in the desired bank. The maximum time any bank can be active is specified by  $t_{RAS}(max.)$ . Therefore, the precharge function must be performed in any active bank within  $t_{RAS}(max.)$ . At the end of precharge, the precharged bank is still in the idle state and is ready to be activated again.

# 3 PrechargeAll command

(RAS# = "L", CAS# = "H", WE# = "L", Bas = Don't care, A10 = "H", A0-A9 and A11 = Don't care)

The PrechargeAll command precharges all banks simultaneously and can be issued even if all banks are not in the active state. All banks are then switched to the idle state.

#### 4 Read command

(RAS# = "H", CAS# = "L", WE# = "H", Bas = Bank, A10 = "L", A0-A8 = Column Address)

The Read command is used to read a burst of data on consecutive clock cycles from an active row in an active bank. The bank must be active for at least  $t_{RCD}$  (min.) before the Read command is issued. During read bursts, the valid data-out element from the starting column address will be available following the CAS latency after the issue of the Read command. Each subsequent data-out element will be valid by the next positive clock edge (refer to the following figure). The DQs go into high-impedance at the end of the burst unless other command is initiated. The burst length, burst sequence, and CAS latency are determined by the mode register, which is already programmed. A full-page burst will continue until terminated (at the end of the page it will wrap to column 0 and continue).

Confidential 7 Rev. 2 Feb. /2014



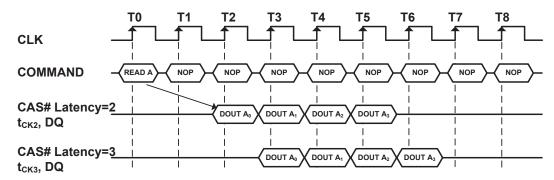


Figure 4. Burst Read Operation (Burst Length = 4, CAS# Latency = 2, 3)

The read data appears on the DQs subject to the values on the DQM inputs two clocks earlier (i.e. DQM latency is two clocks for output buffers). A read burst without the auto precharge function may be interrupted by a subsequent Read or Write command to the same bank or the other active bank before the end of the burst length. It may be interrupted by a BankPrecharge/ PrechargeAll command to the same bank too. The interrupt coming from the Read command can occur on any clock cycle following a previous Read command (refer to the following figure).

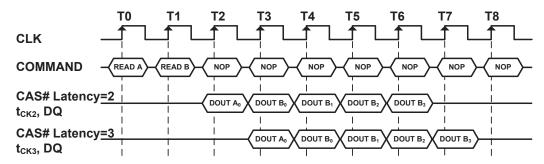


Figure 5. Read Interrupted by a Read (Burst Length = 4, CAS# Latency = 2, 3)

The DQM inputs are used to avoid I/O contention on the DQ pins when the interrupt comes from a Write command. The DQMs must be asserted (HIGH) at least two clocks prior to the Write command to suppress data-out on the DQ pins. To guarantee the DQ pins against I/O contention, a single cycle with high-impedance on the DQ pins must occur between the last read data and the Write command (refer to the following three figures). If the data output of the burst read occurs at the second clock of the burst write, the DQMs must be asserted (HIGH) at least one clock prior to the Write command to avoid internal bus contention.

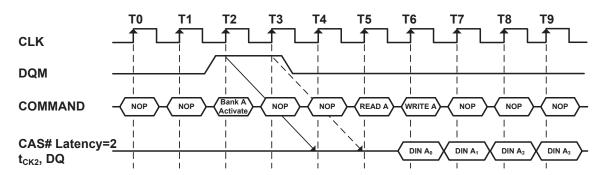


Figure 6. Read to Write Interval (Burst Length ≥ 4, CAS# Latency = 2)

Confidential 8 Rev. 2 Feb. /2014



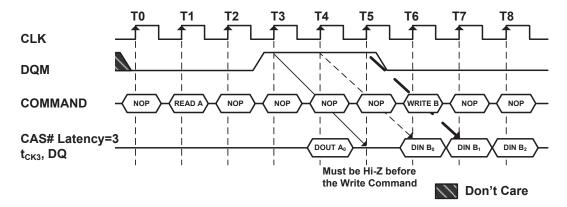


Figure 7. Read to Write Interval (Burst Length ≥ 4, CAS# Latency = 3)

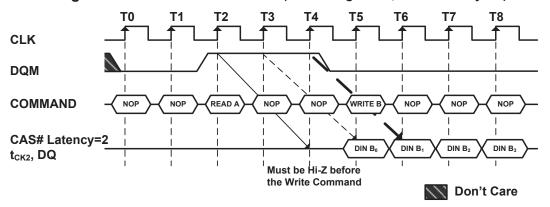


Figure 8. Read to Write Interval (Burst Length ≥ 4, CAS# Latency = 2)

A read burst without the auto precharge function may be interrupted by a BankPrecharge/ PrechargeAll command to the same bank. The following figure shows the optimum time that BankPrecharge/ PrechargeAll command is issued in different CAS latency.

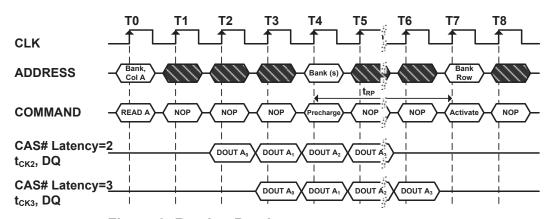


Figure 9. Read to Precharge (CAS# Latency = 2, 3)

5 Read and AutoPrecharge command

(RAS# = "H", CAS# = "L", WE# = "H", Bas = Bank, A10 = "H", A0-A8 = Column Address)

The Read and AutoPrecharge command automatically performs the precharge operation after the read operation. Once this command is given, any subsequent command cannot occur within a time delay

Confidential 9 Rev. 2 Feb. /2014



of  $\{t_{RP} \text{ (min.)} + \text{burst length}\}$ . At full-page burst, only the read operation is performed in this command and the auto precharge function is ignored.

#### 6 Write command

(RAS# = "H", CAS# = "L", WE# = "L", Bas = Bank, A10 = "L", A0-A8 = Column Address)

The Write command is used to write a burst of data on consecutive clock cycles from an active row in an active bank. The bank must be active for at least trace (min.) before the Write command is issued. During write bursts, the first valid data-in element will be registered coincident with the Write command. Subsequent data elements will be registered on each successive positive clock edge (refer to the following figure). The DQs remain with high-impedance at the end of the burst unless another command is initiated. The burst length and burst sequence are determined by the mode register, which is already programmed. A full-page burst will continue until terminated (at the end of the page it will wrap to column 0 and continue).

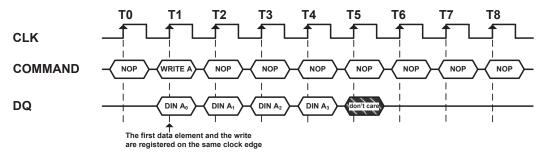


Figure 10. Burst Write Operation (Burst Length = 4)

A write burst without the auto precharge function may be interrupted by a subsequent Write, BankPrecharge/PrechargeAll, or Read command before the end of the burst length. An interrupt coming from Write command can occur on any clock cycle following the previous Write command (refer to the following figure).

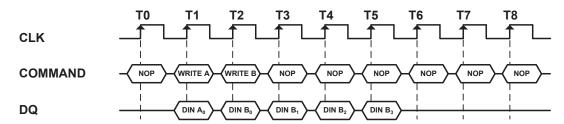


Figure 11. Write Interrupted by a Write (Burst Length = 4)

The Read command that interrupts a write burst without auto precharge function should be issued one cycle after the clock edge in which the last data-in element is registered. In order to avoid data contention, input data must be removed from the DQs at least one clock cycle before the first read data appears on the outputs (refer to the following figure). Once the Read command is registered, the data inputs will be ignored and writes will not be executed.

Confidential 10 Rev. 2 Feb. /2014




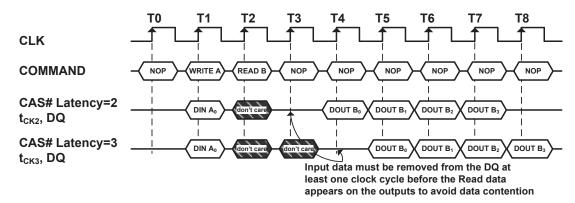


Figure 12. Write Interrupted by a Read (Burst Length = 4, CAS# Latency = 2, 3)

The BankPrecharge/PrechargeAll command that interrupts a write burst without the auto precharge function should be issued m cycles after the clock edge in which the last data-in element is registered, where m equals  $t_{WR}/t_{CK}$  rounded up to the next whole number. In addition, the DQM signals must be used to mask input data, starting with the clock edge following the last data-in element and ending with the clock edge on which the BankPrecharge/PrechargeAll command is entered (refer to the following figure).

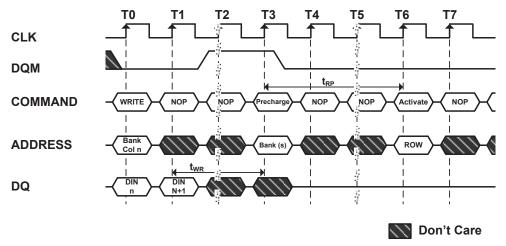


Note: The DQMs can remain low in this example if the length of the write burst is 1 or 2.

Figure 13. Write to Precharge

Write and AutoPrecharge command (RAS# = "H", CAS# = "L", WE# = "L", Bas = Bank, A10 = "H", A0-A8 = Column Address)

The Write and AutoPrecharge command performs the precharge operation automatically after the write operation. Once this command is given, any subsequent command can not occur within a time delay of  $\{(burst length -1) + twR + t_{RP} (min.)\}$ . At full-page burst, only the write operation is performed in this command and the auto precharge function is ignored.

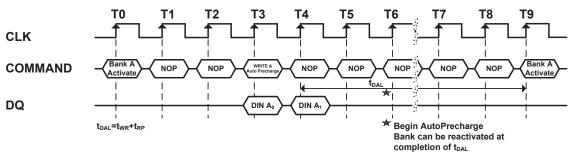

Confidential 11 Rev. 2 Feb. /2014



# Figure 14. Burst Write with Auto-Precharge (Burst Length = 2)

8 Mode Register Set command (RAS# = "L", CAS# = "L", WE# = "L", A0-A11 = Register Data)

The mode register stores the data for controlling the various operating modes of SDRAM. The Mode Register Set command programs the values of CAS latency, Addressing Mode and Burst Length in the Mode register to make SDRAM useful for a variety of different applications. The default values of the Mode Register after power-up are undefined; therefore this command must be issued at the power-up sequence. The state of pins A0~A9 and A11 in the same cycle is the data written to the mode register. Two clock cycles are required to complete the write in the mode register (refer to the following figure). The contents of the mode register can be changed using the same command and the clock cycle requirements during operation as long as all banks are in the idle state.

**Table 5. Mode Register Bitmap** 

			_		•							
BA0,	1 A11,	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0
RFU'	* RF	U*	WBL	Test	Mode	CA	AS Later	тсу	BT	В	urst Len	gth
	•						_					
	1	<u> </u>					<b>V</b>				•	
A9	Write	Burs	st Lengt	h A8	A7	Tes	t Mode			A3	Burst T	ype
0		Bur	st	0	0	N	ormal			0	Seque	ntial
1	;	Single	e Bit	1	0	Vendo	r Use Or	nly		1	Interle	ave
				0	1	Vendo	r Use Or	nly	_			
			•	<u> </u>							<b>*</b>	
A6	A5	A4	CA	S Laten	СУ		A2	A1	A0	В	urst Len	gth
0	0	0	R	eserved			0	0	0		1	
0	0	1	R	eserved			0	0	1		2	
0	1	0	2	2 clocks			0	1	0		4	
0	1	1	3	3 clocks			0	1	1		8	
1	0	0	R	Reserved			1	1	1	Full Pa	age (Seq	uential)
	All	other	Reserv	ed .				P	All other I	Reserve	ed	
( DELL (D												

<sup>\*</sup>Note: RFU (Reserved for future use) should stay "0" during MRS cycle.

Confidential 12 Rev. 2 Feb. /2014



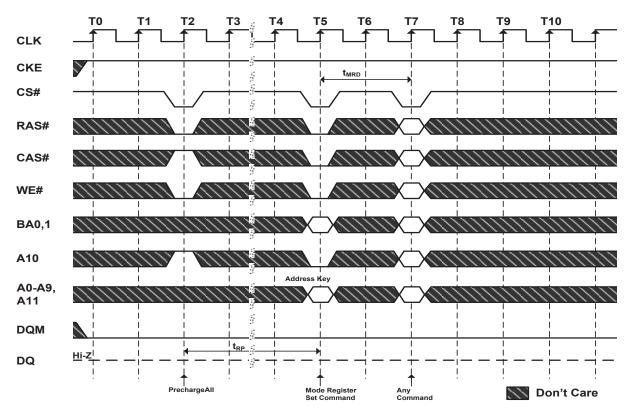


Figure 15. Mode Register Set Cycle

Confidential 13 Rev. 2 Feb. /2014



Burst Length Field (A2~A0)

This field specifies the data length of column access using the A2~A0 pins and selects the Burst Length to be 2, 4, 8, or full page.

Table 6. Burst Length Field

A2	A1	A0	Burst Length
0	0	0	1
0	0	1	2
0	1	0	4
0	1	1	8
1	0	0	Reserved
1	0	1	Reserved
1	1	0	Reserved
1	1	1	Full Page

Full Page Length: 512

• Burst Type Field (A3)

The Burst Type can be one of two modes, Interleave Mode or Sequential Mode.

Table 7. Burst Type Field

A3	Burst Type
0	Sequential
1	Interleave

• Burst Definition, Addressing Sequence of Sequential and Interleave Mode

**Table 8. Burst Definition** 

Puret Longth	Sta	rt Addr	ess	Seguential	Interleave
Burst Length	A2	A1	A0	Sequential	interieave
2	Х	Х	0	0, 1	0, 1
	Х	Х	1	1, 0	1, 0
	Χ	0	0	0, 1, 2, 3	0, 1, 2, 3
4	Х	0	1	1, 2, 3, 0	1, 0, 3, 2
4	Х	1	0	2, 3, 0, 1	2, 3, 0, 1
	Х	1	1	3, 0, 1, 2	3, 2, 1, 0
	0	0	0	0, 1, 2, 3, 4, 5, 6, 7	0, 1, 2, 3, 4, 5, 6, 7
	0	0	1	1, 2, 3, 4, 5, 6, 7, 0	1, 0, 3, 2, 5, 4, 7, 6
	0	1	0	2, 3, 4, 5, 6, 7, 0, 1	2, 3, 0, 1, 6, 7, 4, 5
8	0	1	1	3, 4, 5, 6, 7, 0, 1, 2	3, 2, 1, 0, 7, 6, 5, 4
0	1	0	0	4, 5, 6, 7, 0, 1, 2, 3	4, 5, 6, 7, 0, 1, 2, 3
	1	0	1	5, 6, 7, 0, 1, 2, 3, 4	5, 4, 7, 6, 1, 0, 3, 2
	1	1	0	6, 7, 0, 1, 2, 3, 4, 5	6, 7, 4, 5, 2, 3, 0, 1
	1	1	1	7, 0, 1, 2, 3, 4, 5, 6	7, 6, 5, 4, 3, 2, 1, 0
Full page	location = 0-511		511	n, n+1, n+2, n+3,511, 0, 1, 2, n-1, n,	Not Support

• CAS Latency Field (A6~A4)

This field specifies the number of clock cycles from the assertion of the Read command to the first read data. The minimum whole value of CAS Latency depends on the frequency of CLK. The minimum whole value satisfying the following formula must be programmed into this field.

tcac(min) ≤ CAS Latency X tck

Confidential 14 Rev. 2 Feb. /2014



Table 9. CAS Late	ncv	Field
-------------------	-----	-------

A6	A5	A4	CAS Latency
0	0	0	Reserved
0	0	1	Reserved
0	1	0	2 clocks
0	1	1	3 clocks
1	Х	Х	Reserved

# Test Mode Field (A8~A7)

These two bits are used to enter the test mode and must be programmed to "00" in normal operation.

Table 10. Test Mode Field

A8	A7	Test Mode
0	0	normal mode
0	1	Vendor Use Only
1	X	Vendor Use Only

# • Write Burst Length (A9)

This bit is used to select the write burst mode. When the A9 bit is "0", the Burst-Read-Burst-Write mode is selected. When the A9 bit is "1", the Burst-Read-Single-Write mode is selected.

Table 11. Write Burst Length

A9	A9 Write Burst Mode	
0	Burst-Read-Burst-Write	
1	Burst-Read-Single-Write	

Note: A10 and BA should stay "L" during mode set cycle.

### 9 No-Operation command

(RAS# = "H", CAS# = "H", WE# = "H")

The No-Operation command is used to perform a NOP to the SDRAM which is selected (CS# is Low). This prevents unwanted commands from being registered during idle or wait states.

# 10 Burst Stop command

(RAS# = "H", CAS# = "H", WE# = "L")

The Burst Stop command is used to terminate either fixed-length or full-page bursts. This command is only effective in a read/write burst without the auto precharge function. The terminated read burst ends after a delay equal to the CAS latency (refer to the following figure). The termination of a write burst is shown in the following figure.

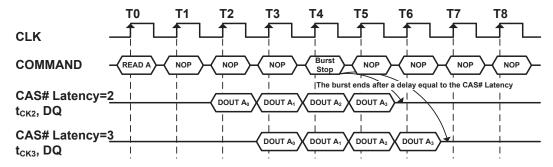


Figure 16. Termination of a Burst Read Operation (Burst Length > 4, CAS# Latency = 2, 3)

Confidential 15 Rev. 2 Feb. /2014



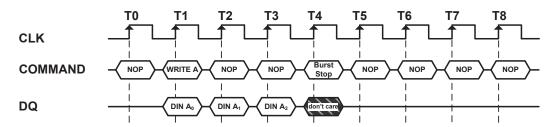


Figure 17. Termination of a Burst Write Operation (Burst Length = X)

# 11 Device Deselect command (CS# = "H")

The Device Deselect command disables the command decoder so that the RAS#, CAS#, WE# and Address inputs are ignored, regardless of whether the CLK is enabled. This command is similar to the No Operation command.

#### 12 AutoRefresh command

(RAS# = "L", CAS# = "L", WE# = "H", CKE = "H", A11 = "Don't care, A0-A9 = Don't care)

The AutoRefresh command is used during normal operation of the SDRAM and is analogous to CAS#-before-RAS# (CBR) Refresh in conventional DRAMs. This command is non-persistent, so it must be issued each time a refresh is required. The addressing is generated by the internal refresh controller. This makes the address bits a "don't care" during an AutoRefresh command. The internal refresh counter increments automatically on every auto refresh cycle to all of the rows. The refresh operation must be performed 4096 times within 64ms. The time required to complete the auto refresh operation is specified by tRc(min.). To provide the AutoRefresh command, all banks need to be in the idle state and the device must not be in power down mode (CKE is high in the previous cycle). This command must be followed by NOPs until the auto refresh operation is completed. The precharge time requirement, tRP(min), must be met before successive auto refresh operations are performed.

## 13 SelfRefresh Entry command

(RAS# = "L", CAS# = "L", WE# = "H", CKE = "L", A0-A9 = Don't care)

The SelfRefresh is another refresh mode available in the SDRAM. It is the preferred refresh mode for data retention and low power operation. Once the SelfRefresh command is registered, all the inputs to the SDRAM become "don't care" with the exception of CKE, which must remain LOW. The refresh addressing and timing is internally generated to reduce power consumption. The SDRAM may remain in SelfRefresh mode for an indefinite period. The SelfRefresh mode is exited by restarting the external clock and then asserting HIGH on CKE (SelfRefresh Exit command).

#### 14 SelfRefresh Exit command

This command is used to exit from the SelfRefresh mode. Once this command is registered, NOP or Device Deselect commands must be issued for  $t_{\rm XSR}(min.)$  because time is required for the completion of any bank currently being internally refreshed. If auto refresh cycles in bursts are performed during normal operation, a burst of 4096 auto refresh cycles should be completed just prior to entering and just after exiting the SelfRefresh mode.

#### 15 Clock Suspend Mode Entry / PowerDown Mode Entry command (CKE = "L")

When the SDRAM is operating the burst cycle, the internal CLK is suspended (masked) from the subsequent cycle by issuing this command (asserting CKE "LOW"). The device operation is held intact while CLK is suspended. On the other hand, when all banks are in the idle state, this command performs entry into the PowerDown mode. All input and output buffers (except the CKE buffer) are turned off in the PowerDown mode. The device may not remain in the Clock Suspend or PowerDown state longer than the refresh period (64ms) since the command does not perform any refresh operations.

Confidential 16 Rev. 2 Feb. /2014





16 Clock Suspend Mode Exit / PowerDown Mode Exit command (CKE= "H")

When the internal CLK has been suspended, the operation of the internal CLK is reinitiated from the subsequent cycle by providing this command (asserting CKE "HIGH", the command should be NOP or deselect). When the device is in the PowerDown mode, the device exits this mode and all disabled buffers are turned on to the active state. tpde(min.) is required when the device exits from the PowerDown mode. Any subsequent commands can be issued after one clock cycle from the end of this command.

17 Data Write / Output Enable, Data Mask / Output Disable command (DQM = "L", "H")

During a write cycle, the DQM signal functions as a Data Mask and can control every word of the input data. During a read cycle, the DQM functions as the controller of output buffers. DQM is also used for device selection, byte selection and bus control in a memory system.

Confidential 17 Rev. 2 Feb. /2014



**Table 12. Absolute Maximum Rating** 

Symbol	ltem		Rating -6/7	Unit	Note
VIN, VOUT	Input, Output Voltage		- 1.0 ~ 4.6	V	1
$V_{DD},V_{DDQ}$	Power Supply Voltage		-1.0 ~ 4.6	V	1
_	Analisant Tanananatura	Commercial	0 ~ 70	°C	1
TA	Ambient Temperature	Industrial	-40 ~ 85	°C	1
		Automotive	-40 ~ 105	°C	1
Tstg	Storage Temperature		- 55 ~ 125	°C	1
TSOLDER	Soldering Temperature (10 second)		260	°C	1
PD	Power Dissipation		1	W	1
los	Short Circuit Output Curre	nt	50	mA	1

Table 13. Recommended D.C. Operating Conditions ( $T_A = -40 \sim 85$ °C)

Symbol	Parameter	Min.	Тур.	Max.	Unit	Note
$V_{DD}$	Power Supply Voltage	3.0	3.3	3.6	V	2
$V_{DDQ}$	Power Supply Voltage(for I/O Buffer)	3.0	3.3	3.6	V	2
VIH	LVTTL Input High Voltage	2.0	3.0	V <sub>DDQ</sub> +0.3	V	2
VIL	LVTTL Input Low Voltage	- 0.3	0	0.8	V	2
lı∟	Input Leakage Current ( $0V \le V_{IN} \le V_{DD}$ , All other pins not under test = $0V$ )		_	10	μΑ	
loL	Output Leakage Current Output disable, $0V \le V_{OUT} \le V_{DDQ}$ )	- 10	_	10	μΑ	
Vон	LVTTL Output "H" Level Voltage ( Iout = -2mA )	2.4	_	_	V	
Vol	LVTTL Output "L" Level Voltage ( Iout = 2mA )	_	_	0.4	V	

Table 14. Capacitance (VDD = 3.3V, f = 1MHz,  $T_A = 25$ °C)

Symbol	Parameter	Min.	Max.	Unit
Cı	Input Capacitance	2	5	pF
C <sub>I/O</sub>	Input/Output Capacitance	4	6.5	pF

Note: These parameters are periodically sampled and are not 100% tested.

Confidential 18 Rev. 2 Feb. /2014



Table 15. D.C. Characteristics (VDD =  $3.3V \pm 0.3V$ ,  $T_A = -40 \sim 85$ °C)

Description/Test condition		Symbol	-6	-7 Unit		Noto
Description/Test condition		Syllibol	Ma	ax.	Ollit	NOLE
Operating Current						3
trc ≥ trc(min), Outputs Open			120	110		J J
One bank active			120	110	1 .	
Precharge Standby Current in non-power down mod	е					
$t_{CK}$ = 15ns, CS# $\geq$ V <sub>IH</sub> (min), CKE $\geq$ V <sub>IH</sub>		I <sub>DD2N</sub>	20	20		
Input signals are changed every 2clks			20	20		
Precharge Standby Current in non-power down mod	е		4.5	45		
$t_{CK} = \infty$ , $CLK \le V_{IL}(max)$ , $CKE \ge V_{IH}$		IDD2NS	15	15	1 .	
Precharge Standby Current in power down mode			0			
$t_{CK}$ = 15ns, CKE $\leq V_{IL}(max)$		I <sub>DD2P</sub>	2	2		
Precharge Standby Current in power down mode			0			
tck = $\infty$ , CKE ≤ ViL(max)		IDD2PS	2	2		
Active Standby Current in non-power down mode					mA	
$t_{CK}$ = 15ns, $CKE \ge V_{IH}(min)$ , $CS\# \ge V_{IH}(min)$		I <sub>DD3N</sub>	30	30		
Input signals are changed every 2clks				00		
Active Standby Current in non-power down mode			25	25		
CKE $\geq$ V <sub>IH</sub> (min), CLK $\leq$ V <sub>IL</sub> (max), t <sub>CK</sub> = $\infty$		IDD3NS	25	25		
Operating Current (Burst mode)			4.40	400		3, 4
tcк =tcк(min), Outputs Open, Multi-bank interleave		I <sub>DD4</sub>	140	130		0, 4
Refresh Current			200	200		3
trc ≥ trc(min)		I <sub>DD5</sub>	200	200		Ŭ
T <sub>A</sub> = 0~70°C			0	0		
Self Refresh Current			2	2	] .	
CKE $\leq 0.2V$ ; for other inputs $V_{IH} \geq V_{DD}$ - 0.2, $V_{IL} \leq 0.2V$	T <sub>Δ</sub> = -40~85°C	I <sub>DD6</sub>	0	_		
	1A 40 00 0		6	6		

Confidential 19 Rev. 2 Feb. /2014



Table 16. Electrical Characteristics and Recommended A.C. Operating Conditions  $(V_{DD} = 3.3V \pm 0.3V, T_A = -40 \sim 85^{\circ}C)$  (Note: 5, 6, 7, 8)

	A.C. Parameter		-6		-7			NI - 4 -
Symbol			Min	Max.	Min	Max.	Unit	Note
trc	Row cycle time (same bank)		60	-	63	-		
trcd	RAS# to CAS# delay (same bank)		18	-	21	-		
t <sub>RP</sub>	Precharge to refresh/row act command (same bank)	ivate	18	-	21	-	ns	
<b>t</b> RRD	Row activate to row activate (different banks)	delay	12	-	14	-		
tras	Row activate to precharge tir (same bank)	ne	42	100k	42	100k		
twr	Write recovery time		2	-	2	-		
tccd	CAS# to CAS# Delay time		1	-	1	-	tck	
,	Clock cycle time	CL* = 2	9	-	10	-		9
<b>t</b> cĸ		CL* = 3	6	-	7	-		9
tсн	Clock high time		2.5	-	2.5	-		10
tcL	Clock low time		2.5	-	2.5	-		10
tac	Access time from CLK	CL* = 2	-	6	-	6		10
IAC	(positive edge)	CL* = 3	-	5	-	5.4	ns	
tон	Data output hold time		2.5	-	2.7	-	115	9
tız	Data output low impedance		1	-	1	-		
tHZ	Data output high impedance		-	5	-	5.4		8
tis	Data/Address/Control Input set-up time		1.5	-	1.5	-		10
tıн	Data/Address/Control Input h	Data/Address/Control Input hold time		-	1	-		10
tPDE	Power Down Exit set-up time	;	tıs+ tcĸ	-	tıs+ tcĸ	-		
trefi	Refresh Interval Time		-	15.6	-	15.6	μS	
txsr	Exit Self Refresh to Read Co	mmand time	tis+ trc	-	tıs+ trc	-	ns	

<sup>\*</sup> CL is CAS Latency.

# Note:

- 1. Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.
- All voltages are referenced to V<sub>SS</sub>. VIH (Max) = 4.6V for pulse width ≤ 3ns. VIL (Min) = -1.0V for pulse width ≤ 3ns.
- 3. These parameters depend on the cycle rate and these values are measured by the cycle rate under the minimum value of tck and tRc. Input signals are changed one time during every 2 tck.
- 4. These parameters depend on the output loading. Specified values are obtained with the output open.
- 5. Power-up sequence is described in Note 11.
- 6. A.C. Test Conditions

Confidential 20 Rev. 2 Feb. /2014



<b>T</b> - I - I	- 43	. \/\_	1 1 - 1
I ani	ור ב		L Interface
Iabi	5 I <i>I</i> .		L IIIIGIIACE

Reference Level of Output Signals	1.4V / 1.4V
Output Load	Reference to the Under Output Load (B)
Input Signal Levels	2.4V / 0.4V
Transition Time (Rise and Fall) of Input Signals	1ns
Reference Level of Input Signals	1.4V

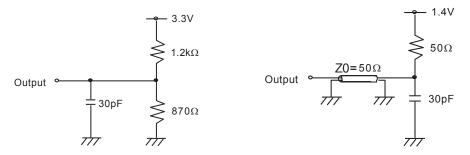


Figure 18.1 LVTTL D.C. Test Load (A)

Figure 18.2 LVTTL A.C. Test Load (B)

- 7. Transition times are measured between  $V_{IH}$  and  $V_{IL}$ . Transition (rise and fall) of input signals are in a fixed slope (1 ns).
- 8. thz defines the time in which the outputs achieve the open circuit condition and are not at reference levels.
- 9. If clock rising time is longer than 1 ns, (t<sub>R</sub> / 2 -0.5) ns should be added to the parameter.
- 10. Assumed input rise and fall time  $t_T$  ( $t_R \& t_F$ ) = 1 ns

If  $t_R$  or  $t_F$  is longer than 1 ns, transient time compensation should be considered, i.e., [(tr + tf)/2 - 1] ns should be added to the parameter.

11. Power up Sequence

Power up must be performed in the following sequence.


- 1) Power must be applied to V<sub>DD</sub> and V<sub>DDQ</sub> (simultaneously) when CKE= "L", DQM= "H" and all input signals are held "NOP" state.
- 2) Start clock and maintain stable condition for minimum 200 μs, then bring CKE= "H" and, it is recommended that DQM is held "HIGH" (V<sub>DD</sub> levels) to ensure DQ output is in high impedance.
- 3) All banks must be precharged.
- 4) Mode Register Set command must be asserted to initialize the Mode register.
- 5) A minimum of 2 Auto-Refresh dummy cycles must be required to stabilize the internal circuitry of the device.
  - \* The Auto Refresh command can be issue before or after Mode Register Set command

Confidential 21 Rev. 2 Feb. /2014



# **Timing Waveforms**


Figure 19. AC Parameters for Write Timing (Burst Length=4)

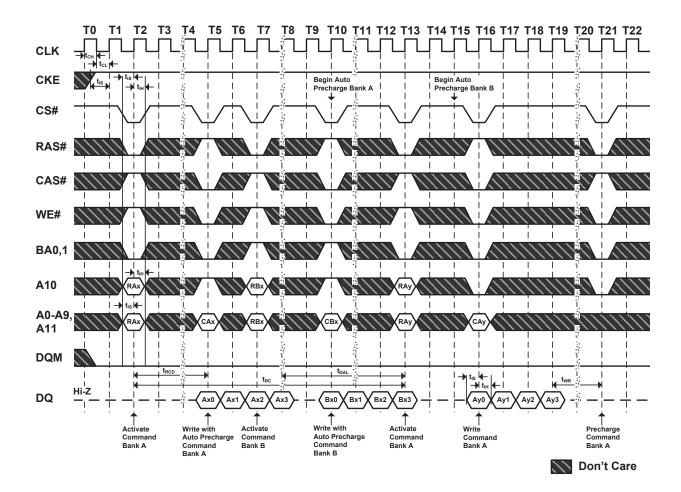

Confidential 22 Rev. 2 Feb. /2014




Figure 20. AC Parameters for Read Timing (Burst Length=2, CAS# Latency=2)

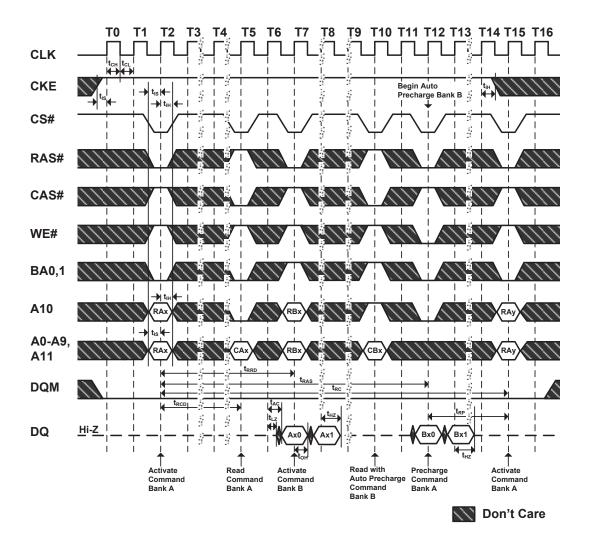

Confidential 23 Rev. 2 Feb. /2014




Figure 21. Auto Refresh (Burst Length=4, CAS# Latency=2)

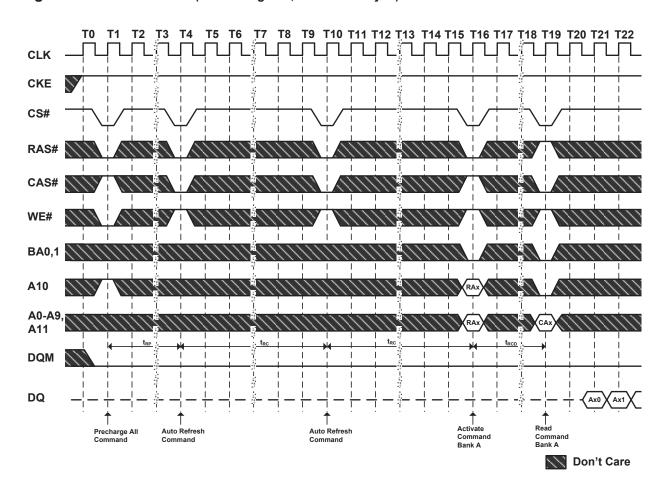

Confidential 24 Rev. 2 Feb. /2014




Figure 22. Power on Sequence and Auto Refresh

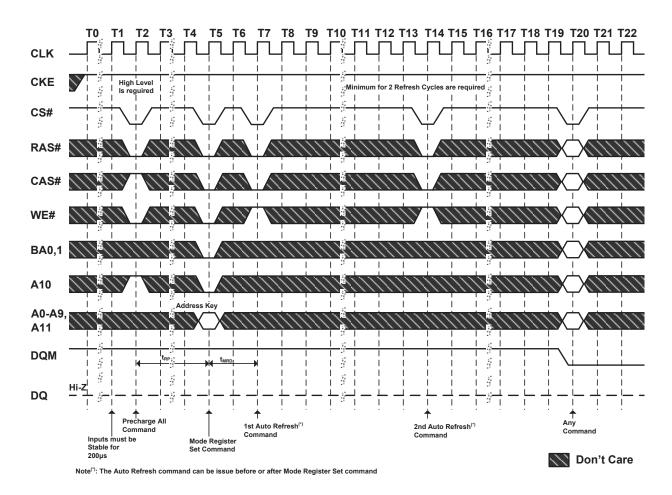

Confidential 25 Rev. 2 Feb. /2014



Figure 23. Self Refresh Entry & Exit Cycle

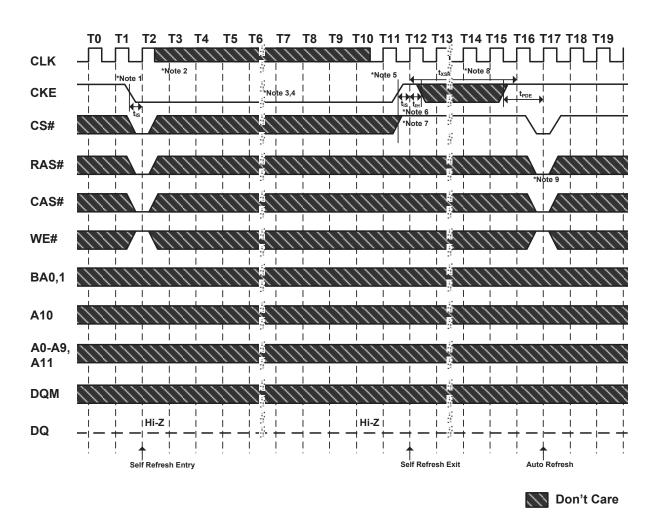

### Note: To Enter SelfRefresh Mode

- 1. CS#, RAS# & CAS# with CKE should be low at the same clock cycle.
- 2. After 1 clock cycle, all the inputs including the system clock can be don't care except for CKE.
- 3. The device remains in SelfRefresh mode as long as CKE stays "low".
- 4. Once the device enters SelfRefresh mode, minimum tras is required before exit from SelfRefresh.


# To Exit SelfRefresh Mode

- 5. System clock restart and be stable before returning CKE high.
- 6. Enable CKE and CKE should be set high for valid setup time and hold time.
- 7. CS# starts from high.
- 8. Minimum txsR is required after CKE going high to complete SelfRefresh exit.
- 9. 4096 cycles of burst AutoRefresh is required before SelfRefresh entry and after SelfRefresh exit if the system uses burst refresh.

Confidential 26 Rev. 2 Feb. /2014




Figure 24.1. Clock Suspension During Burst Read (Using CKE) (Burst Length=4, CAS# Latency=2)

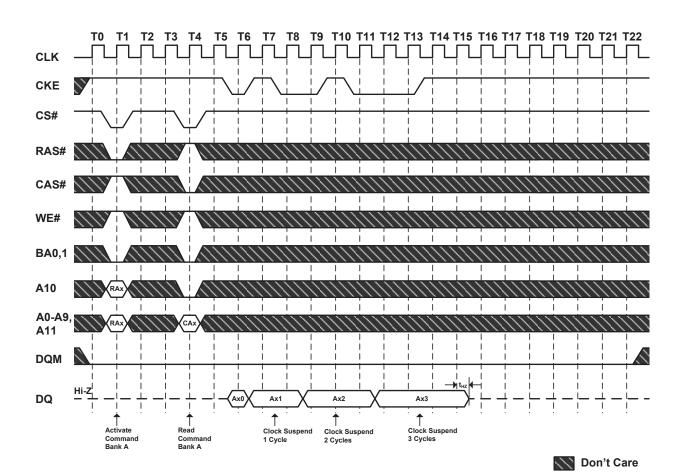

Confidential 27 Rev. 2 Feb. /2014



Figure 24.2. Clock Suspension During Burst Read (Using CKE) (Burst Length=4, CAS# Latency=3)

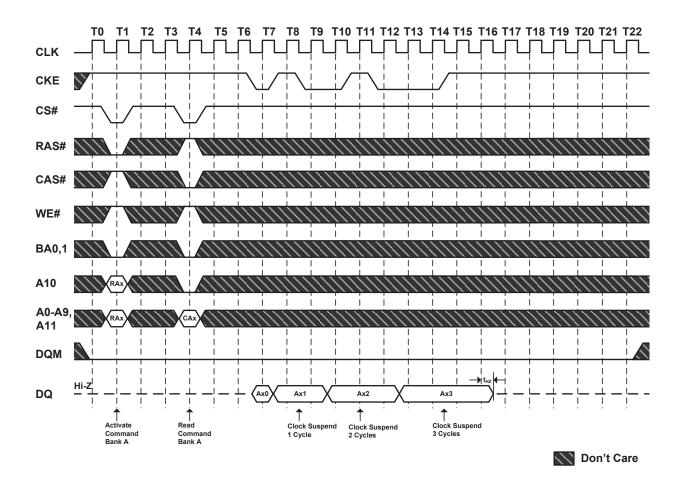

Confidential 28 Rev. 2 Feb. /2014



Figure 25. Clock Suspension During Burst Write (Using CKE) (Burst Length=4)


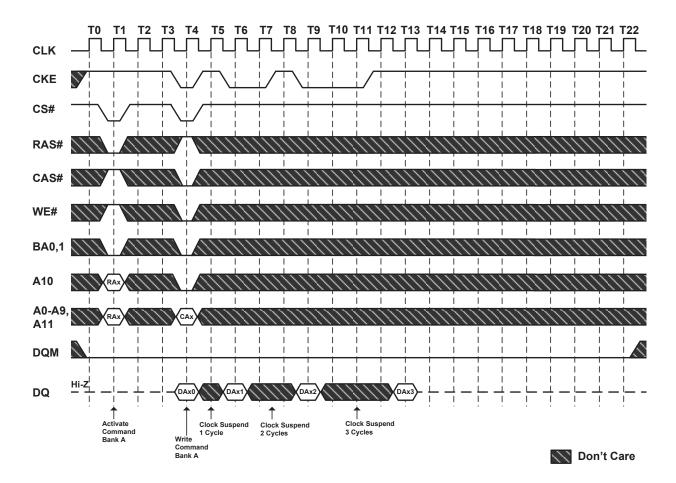





Figure 26. Power Down Mode and Clock Suspension (Burst Length=4, CAS# Latency=2)

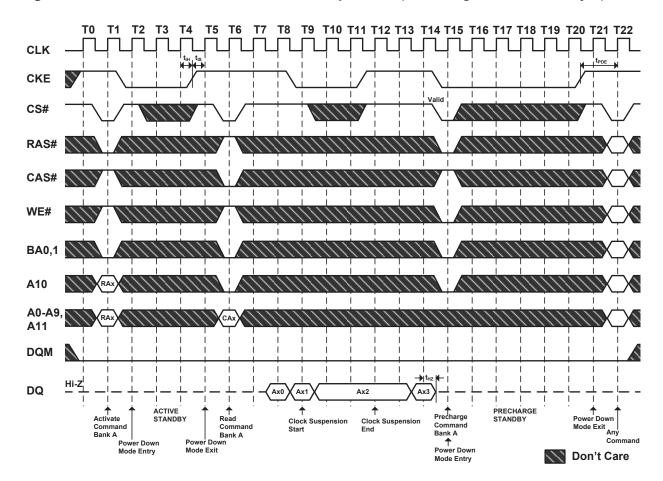

Confidential 30 Rev. 2 Feb. /2014




Figure 27.1. Random Column Read (Page within same Bank) (Burst Length=4, CAS# Latency=2)

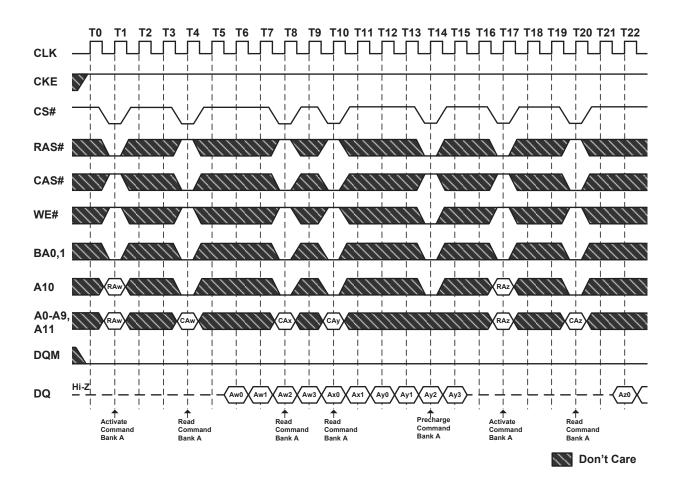

Confidential 31 Rev. 2 Feb. /2014




Figure 27.2. Random Column Read (Page within same Bank) (Burst Length=4, CAS# Latency=3)

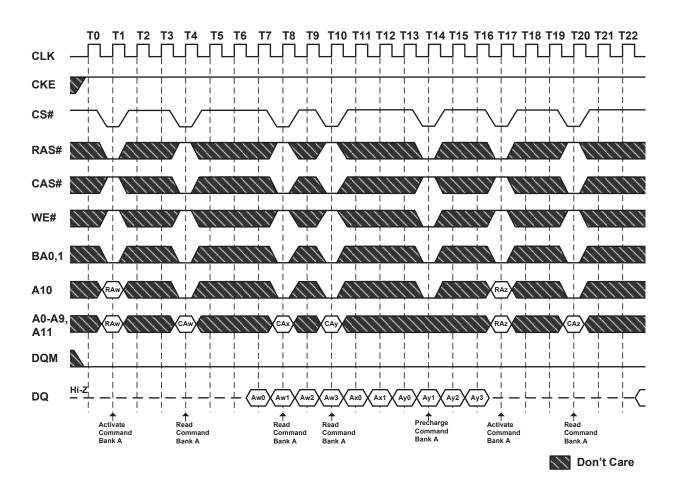

Confidential 32 Rev. 2 Feb. /2014



Figure 28. Random Column Write (Page within same Bank) (Burst Length=4)

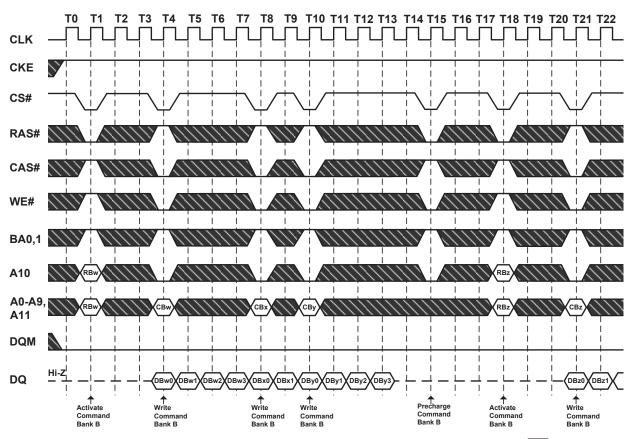


Non't Care

Confidential 33 Rev. 2 Feb. /2014




Figure 29.1. Random Row Read (Interleaving Banks) (Burst Length=8, CAS# Latency=2)

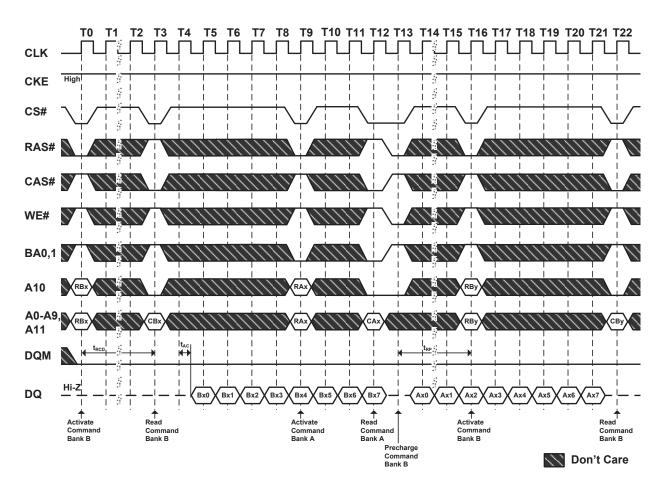

Confidential 34 Rev. 2 Feb. /2014



Figure 29.2. Random Row Read (Interleaving Banks) (Burst Length=8, CAS# Latency=3)

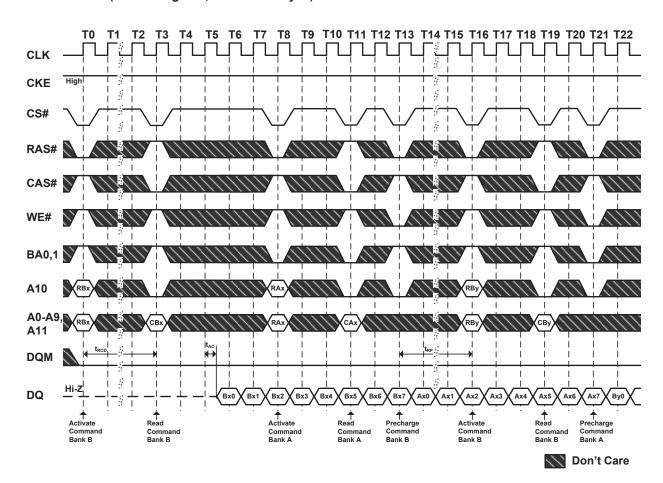

Confidential 35 Rev. 2 Feb. /2014



Figure 30. Random Row Write (Interleaving Banks)
(Burst Length=8)


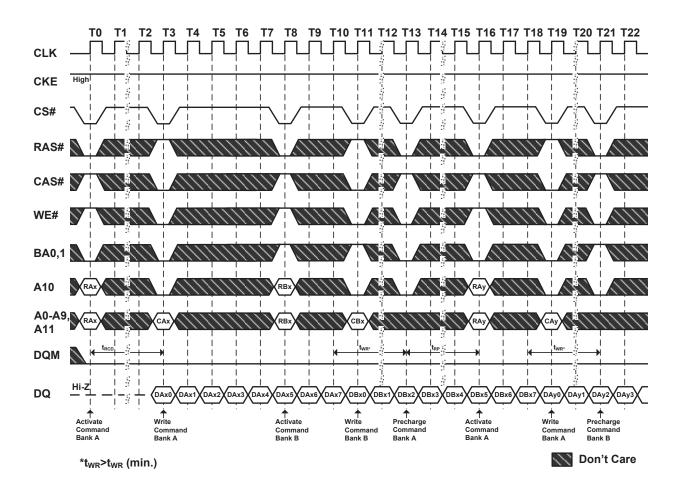





Figure 31.1. Read and Write Cycle (Burst Length=4, CAS# Latency=2)

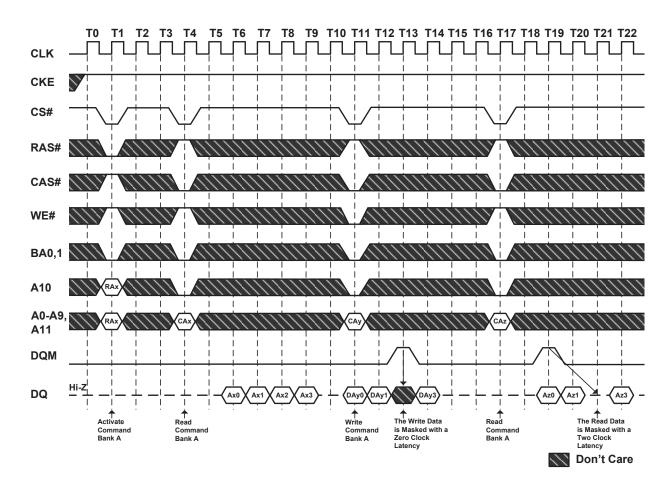

Confidential 37 Rev. 2 Feb. /2014




Figure 31.2. Read and Write Cycle (Burst Length=4, CAS# Latency=3)

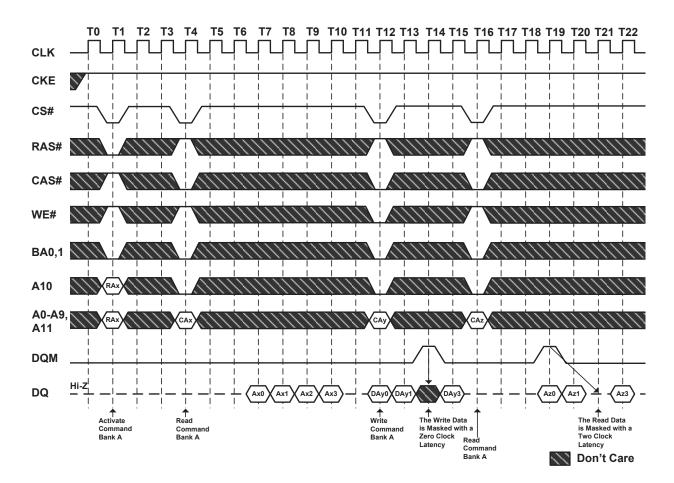

Confidential 38 Rev. 2 Feb. /2014




Figure 32.1. Interleaving Column Read Cycle (Burst Length=4, CAS# Latency=2)

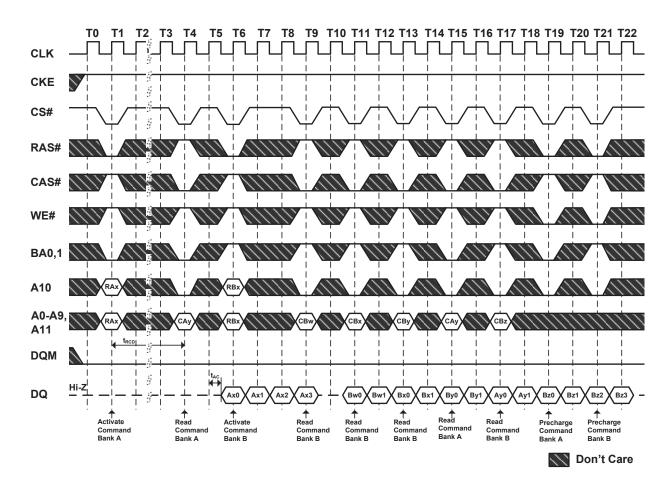

Confidential 39 Rev. 2 Feb. /2014




Figure 32.2. Interleaved Column Read Cycle (Burst Length=4, CAS# Latency=3)

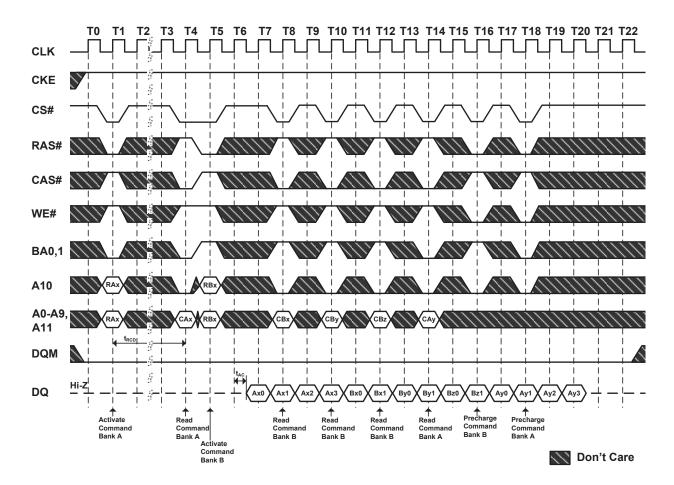

Confidential 40 Rev. 2 Feb. /2014




Figure 33. Interleaved Column Write Cycle (Burst Length=4)

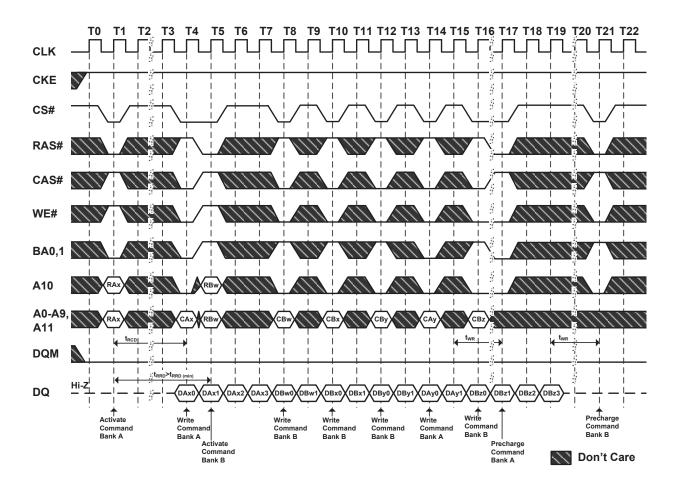

Confidential 41 Rev. 2 Feb. /2014




Figure 34.1. Auto Precharge after Read Burst (Burst Length=4, CAS# Latency=2)

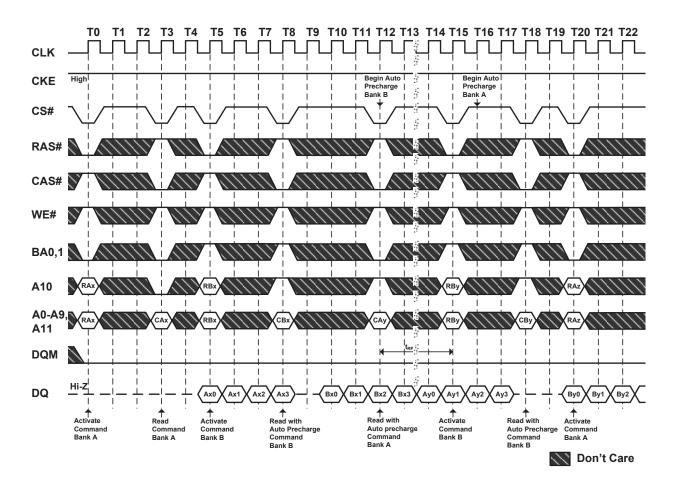

Confidential 42 Rev. 2 Feb. /2014




Figure 34.2. Auto Precharge after Read Burst (Burst Length=4, CAS# Latency=3)

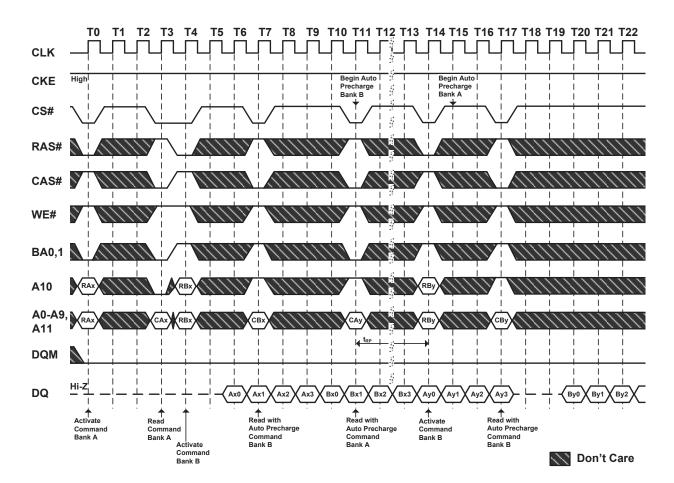

Confidential 43 Rev. 2 Feb. /2014




Figure 35. Auto Precharge after Write Burst (Burst Length=4)

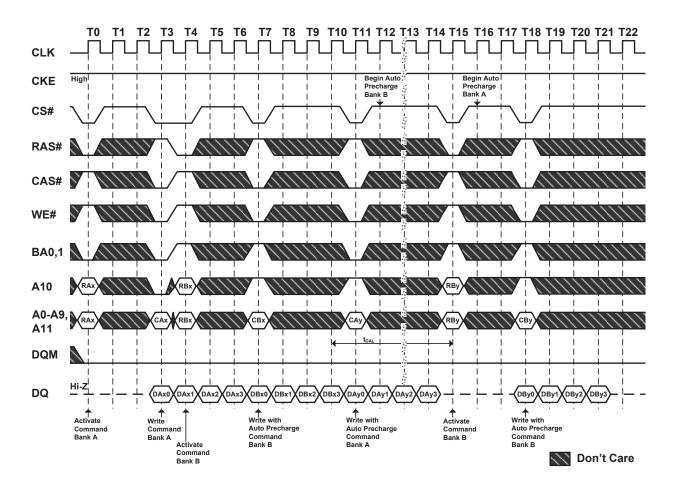

Confidential 44 Rev. 2 Feb. /2014




Figure 36.1. Full Page Read Cycle (Burst Length=Full Page, CAS# Latency=2)

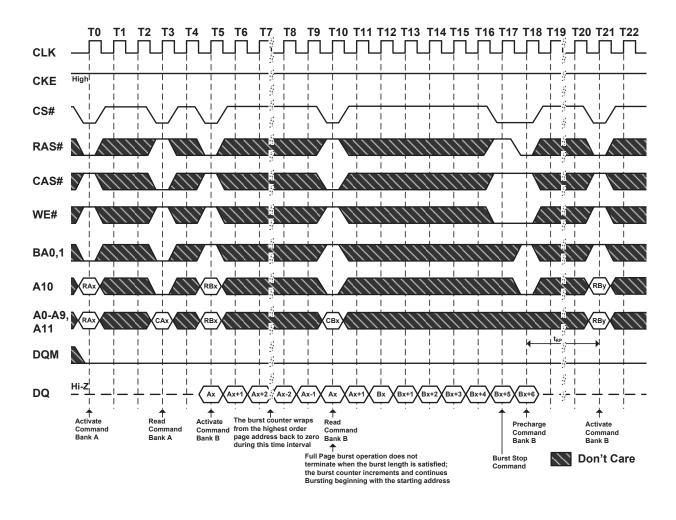

Confidential 45 Rev. 2 Feb. /2014




Figure 36.2. Full Page Read Cycle (Burst Length=Full Page, CAS# Latency=3)

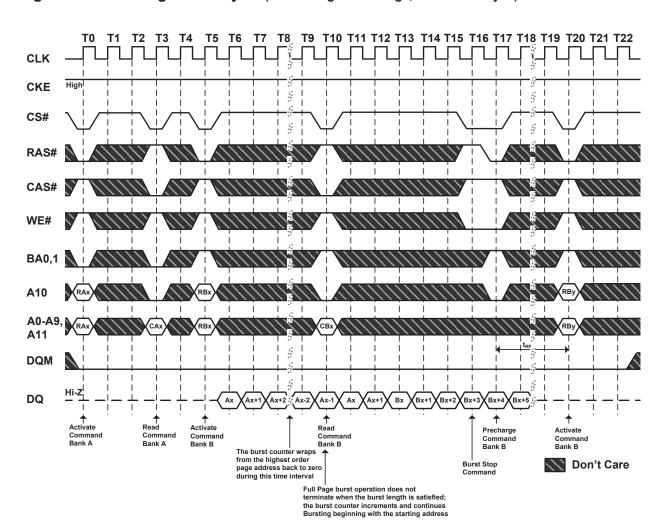

Confidential 46 Rev. 2 Feb. /2014




Figure 37. Full Page Write Cycle (Burst Length=Full Page)

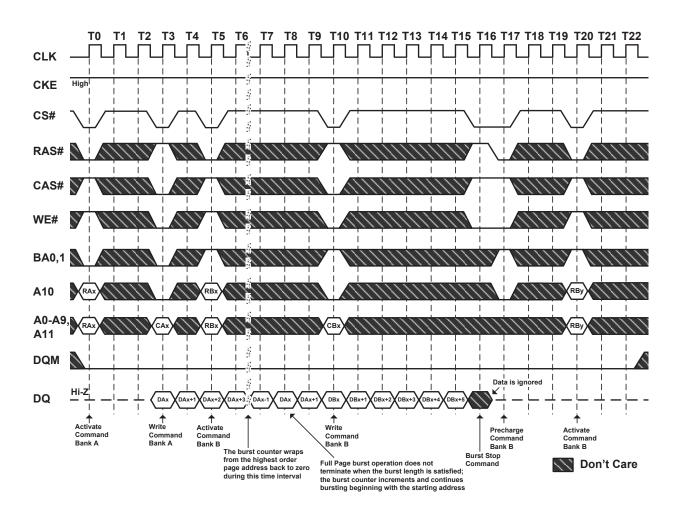

Confidential 47 Rev. 2 Feb. /2014



Figure 38. Byte Read and Write Operation (Burst Length=4, CAS# Latency=2)

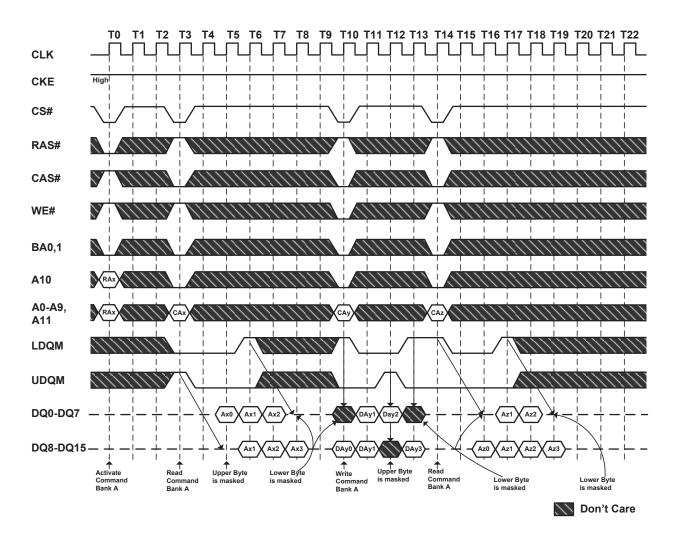


Confidential 48 Rev. 2 Feb. /2014



Figure 39. Random Row Read (Interleaving Banks)


(Burst Length=4, CAS# Latency=2)

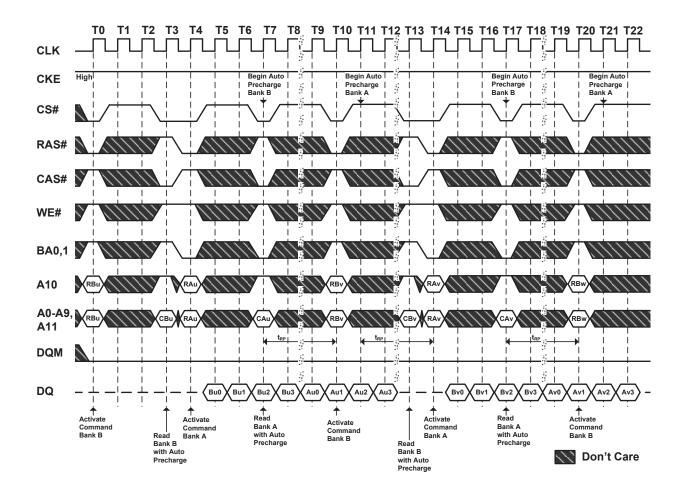

Confidential 49 Rev. 2 Feb. /2014




Figure 40. Full Page Random Column Read (Burst Length=Full Page, CAS# Latency=2)

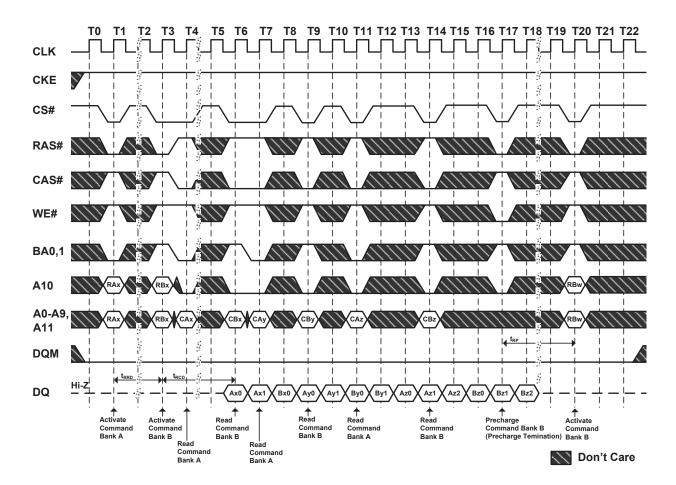

Confidential 50 Rev. 2 Feb. /2014




Figure 41. Full Page Random Column Write (Burst Length=Full Page)

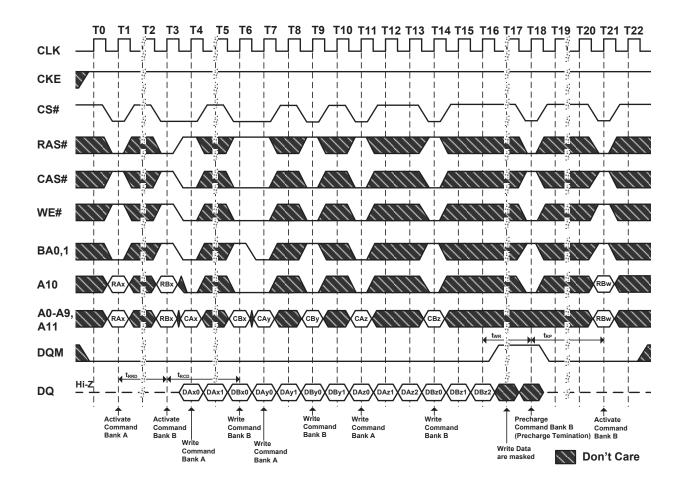

Confidential 51 Rev. 2 Feb. /2014




Figure 42. Precharge Termination of a Burst (Burst Length=4, 8 or Full Page, CAS# Latency=3)

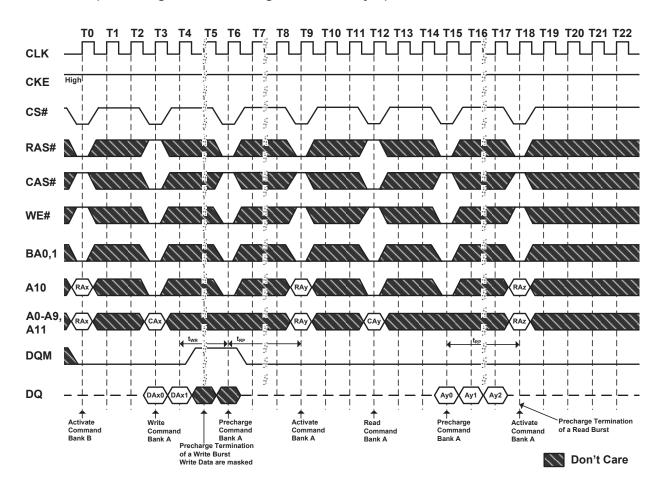

Confidential 52 Rev. 2 Feb. /2014



Figure 43. 54 Pin TSOP II Package Outline Drawing Information

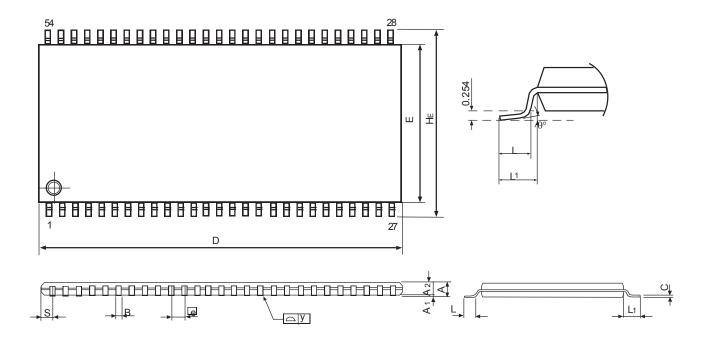

Symbol	Dimension in inch			Dimension in mm		
	Min	Nom	Max	Min	Nom	Max
Α			0.047			1.2
A1	0.002		0.008	0.05		0.2
A2	0.035	0.039	0.043	0.9	1.0	1.1
В	0.010	0.014	0.018	0.25	0.35	0.45
С	0.004	0.006	0.008	0.12	0.165	0.21
D	0.87	0.875	0.88	22.09	22.22	22.35
Е	0.395	0.400	0.405	10.03	10.16	10.29
е		0.031			0.8	
HE	0.455	0.463	0.471	11.56	11.76	11.96
L	0.016		0.024	0.4	0.5	0.6
L1		0.032			0.84	
S		0.028			0.71	
у			0.004			0.1
$\theta$	0 °		8°	0 °		8°


## Notes:

- 1. Dimension D&E do not include interlead flash.
- 2. Dimension B does not include dambar protrusion/intrusion.
- 3. Dimension S includes end flash.
- 4. Controlling dimension: mm

Confidential 53 Rev. 2 Feb. /2014



Figure 44. 54 Ball TFBGA Package Outline Drawing Information

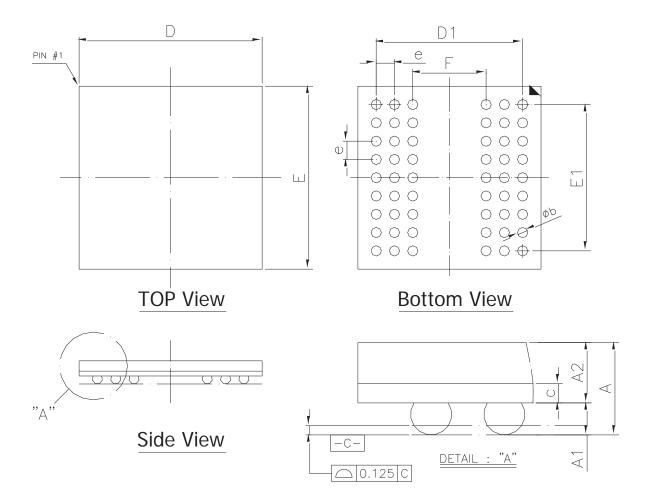

Symbol	Dimension in inch			Dimension in mm		
Symbol	Min	Nom	Max	Min	Nom	Max
Α			0.047		-	1.20
A1	0.012	0.014	0.016	0.30	0.35	0.40
A2	0.024	0.026	0.028	0.61	0.66	0.71
С	0.007	0.008	0.010	0.17	0.21	0.25
D	0.311	0.315	0.319	7.90	8.00	8.10
Е	0.311	0.315	0.319	7.90	8.00	8.10
D1		0.252			6.40	
E1		0.252			6.40	
е		0.031			0.80	
b	0.016	0.018	0.020	0.40	0.45	0.50
F		0.126			3.20	







Alliance Memory, Inc 511 Taylor Way, San Carlos, CA 94070, USA Phone: 650-610-6800 Fax: 650-620-9211

www.alliancememory.com

Copyright © Alliance Memory All Rights Reserved

O Copyright 2007 Alliance Memory, Inc. All rights reserved. Our three-point logo, our name and Intelliwett are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at anytime, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information inthis product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or wemantee to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability orwarranties related to fitness for a particular purpose, merchantability, or infiningement of any intellectual property rights, except as express agreed to indifference and Conditions of Sale. (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance/STErms and Conditions of Sale. (which are available from Alliance) and include the products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, fredemarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products from a critical components infle-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting s

Confidential 55 Rev. 2 Feb. /2014