

SB220E-G thru SB2100E-G

"-G" : RoHS Device

Voltage Range: 20 to 100 V

Current: 2.0 A




FEATURES

- Low drop down voltage
- 2.0A operation at TA=75°C with no thermal runaway
- For use in low voltage, high frequency invertors free wheeling and polarity protection
- Silicon epitaxial planar chips
- Electrostatic discharge (ESD) test under IEC61000-4-2: standard: >15KV (air) & 8KV (contact)
- Lead-free part, meet RoHS requirements

MECHANICAL DATA

- Case: Molded plastic body DO-15
- Epoxy: UL94-V0 rated flame retardant
- Terminals: Solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.015 ounces, 0.4 grams

DO-15

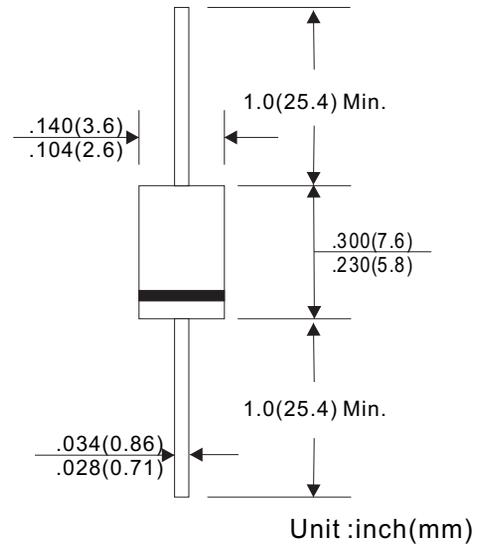

MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

| | Symbols | 220E | 240E | 245E | 250E | 260E | 280E | 2100E | Units |
|---|------------------|------------|------|------|------|------|------------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage | VRRM | 20 | 40 | 45 | 50 | 60 | 80 | 100 | Volts |
| Maximum RMS Voltage | VRMS | 14 | 28 | 30 | 35 | 42 | 56 | 70 | Volts |
| Maximum DC Blocking Voltage | VDC | 20 | 40 | 45 | 50 | 60 | 80 | 100 | Volts |
| Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at TA=75°C, See Figure 1 | I _{AV} | 2.0 | | | | | | | Amps |
| Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC Method) T _L =110°C | I _{FSM} | 50 | | | | | | | Amps |
| Maximum Forward Voltage at 2.0A (Note 1) | V _F | 0.50 | | 0.70 | | 0.85 | | Volts | |
| Maximum DC Reverse Current at Rated DC Blocking Voltage TA= 25°C TA=100°C | I _R | 0.5 | | | | | | | mA |
| | | 20 | | | | 10 | | | |
| Typical Junction Capacitance (Note 2) | C _J | 170 | | | | | | | pF |
| Typical Thermal Resistance (Note 3) | R _{θJA} | 50.0 | | | | | | | °C/W |
| | R _{θJL} | 25.0 | | | | | | | |
| Operating Junction Temperature Range | T _J | -65 ~ +125 | | | | | -65 ~ +150 | | °C |
| Storage Temperature Range | T _{STG} | -65 ~ +150 | | | | | | | °C |

Note 1. Pulse test: 300µS pulse width, 1% duty cycle

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted 0.375" (9.5mm) lead length

RATINGS AND CHARACTERISTIC CURVES SB220E-G thru SB2100E-G

Fig.1 - Forward Current Derating Curve

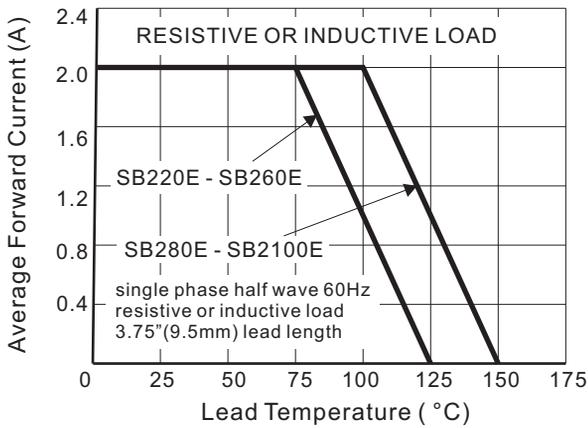


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

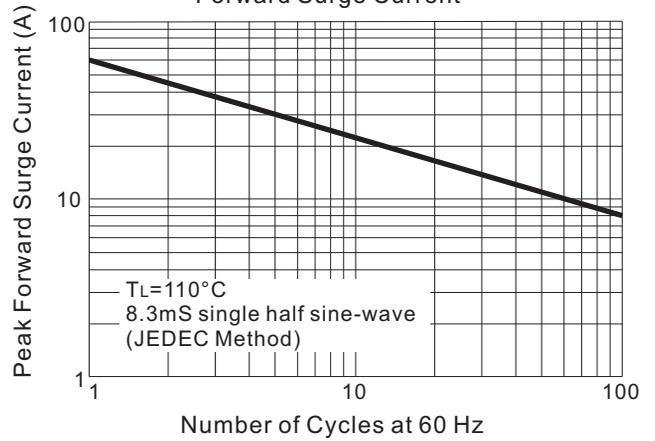


Fig. 3 - Typical Instantaneous Forward Characteristics

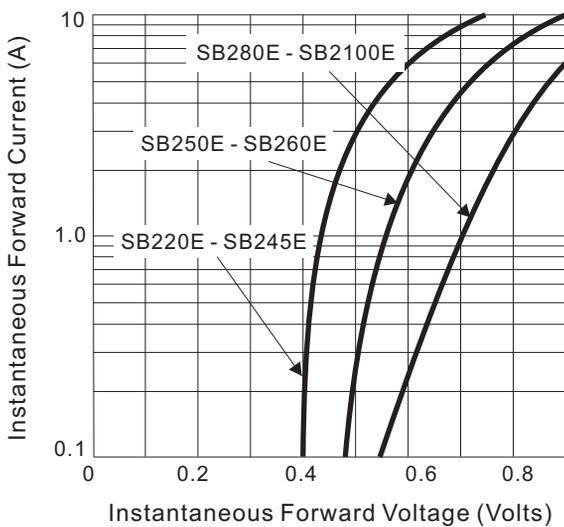


Fig. 4A - Typical Reverse Characteristics

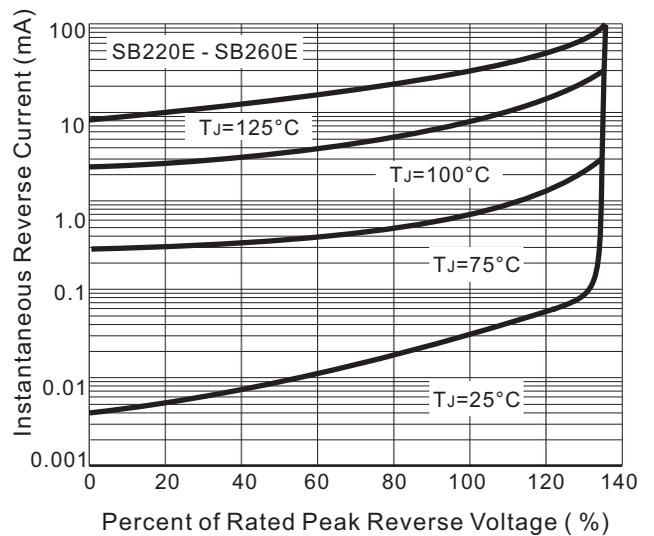


Fig. 5 - Typical Junction Capacitance

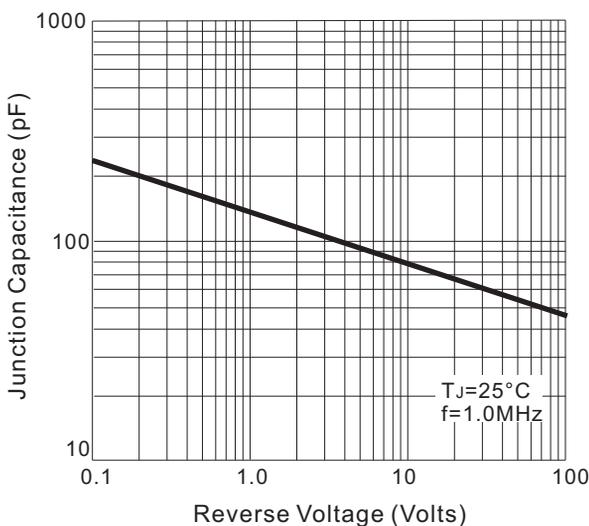


Fig. 4B - Typical Reverse Characteristic

