

# GPS + Iridium Multiband Ceramic Patch Antenna



APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Features

- GPS (L1) + Iridium multiband patch antenna
- Low VSWR of 1.8
- Gain of 2 dBi (GPS L1) and 3 dBi (Iridium)

## Applications

- IoT
- Handheld devices
- Telematics
- Transportation
- Remote Monitoring
- Satellite telephony
- Tracking
- Fleet and asset monitoring

## Electrical Specifications

Parameters	GPS	Iridium	Units	Notes
Operating Frequency	1575.42 ± 1.023	1610 ~ 1625	MHz	
Center Frequency	1586 ± 3		MHz	
Bandwidth	44		MHz	Min. @ RL : -10 dB
VSWR	1.8			Max.
Gain	2.0	3.0	dBi	Typ. @Zenith
Impedance	50		Ω	

Note: The above-mentioned values apply only for the standard ground plane size of 65.0 x 50.9 mm.

## Environmental Specifications

Parameters	Specification	Notes
Operating Temperature	-40°C to +105°C	
Storage Temperature	-40°C to +105°C	
Relative Humidity	0 ~ 95 %	
Frequency Temperature Coefficient (Tf)	-40°C to +105°C	0 ± 20 ppm / °C
Soldering Feed Pin Temperature	+290°C	Max. for 3 second

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR




25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Product Dimensions

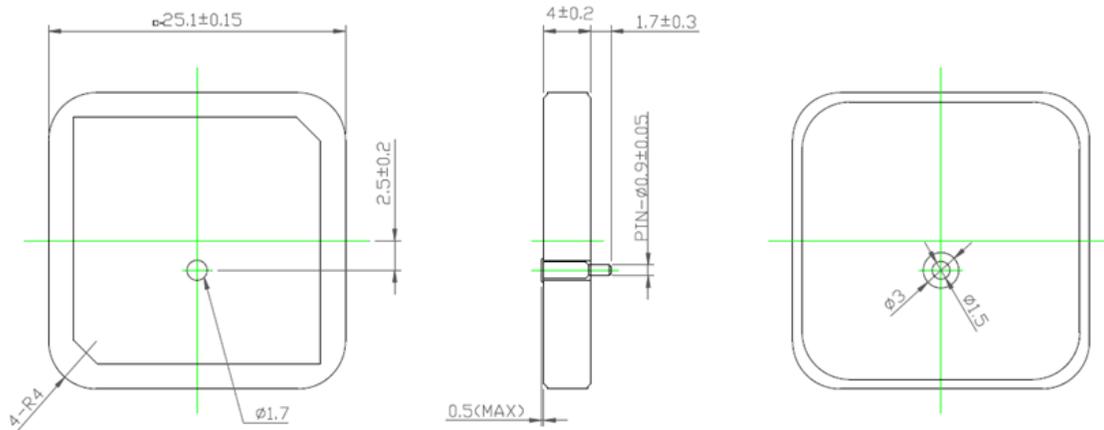

Unit : mm

## Layout Dimensions

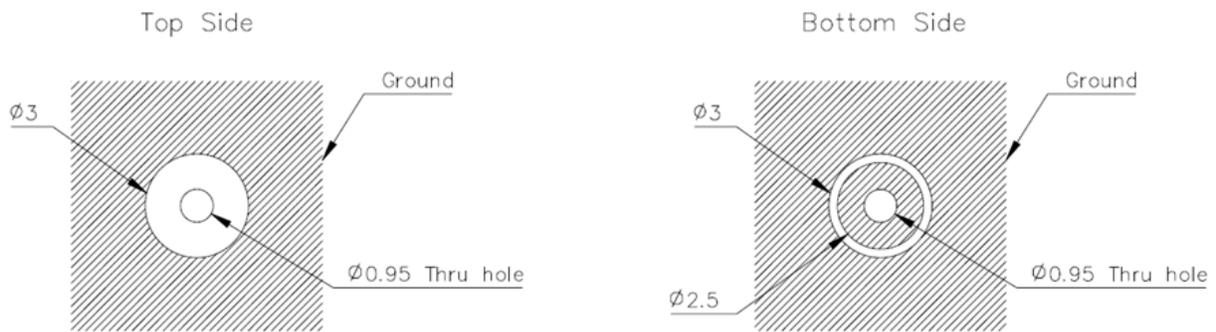

TOL :  $\pm 0.2$   
UNIT : mm

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Tape Dimensions

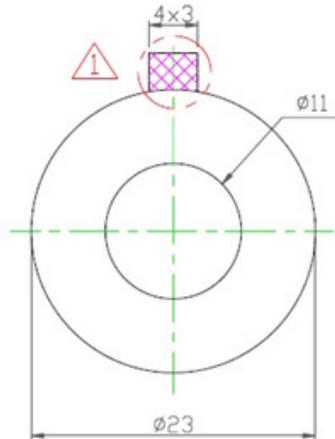

1. NITTO : NO.5015
2. Double-coated adhesive tape for industrial use
3. Thickness : 0.12mm

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR




25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Test Fixture Dimension

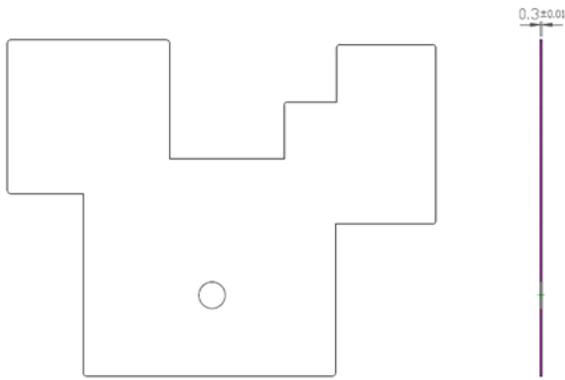


Bottom side

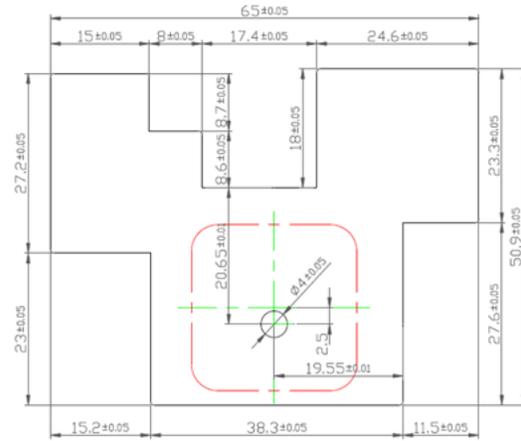

Top side

Unit : mm

## Test Fixture Set-up and Measurement

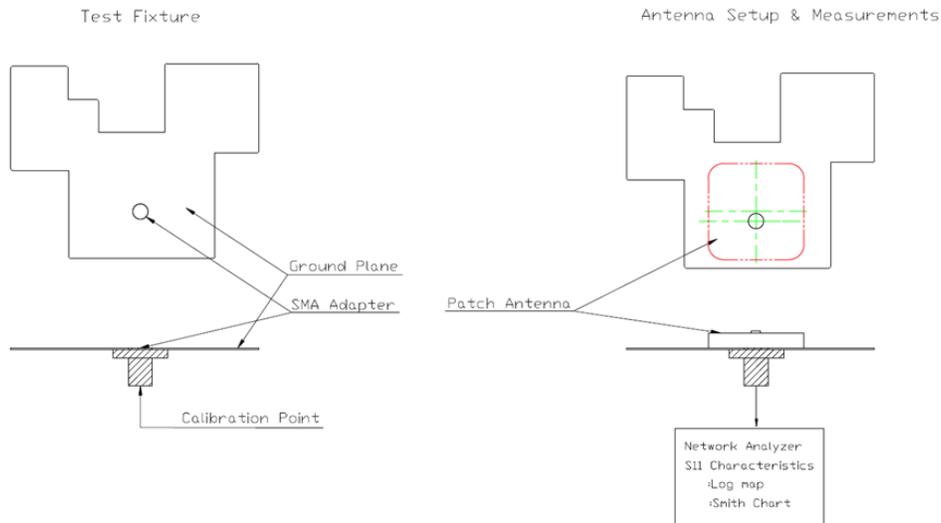

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Return Loss

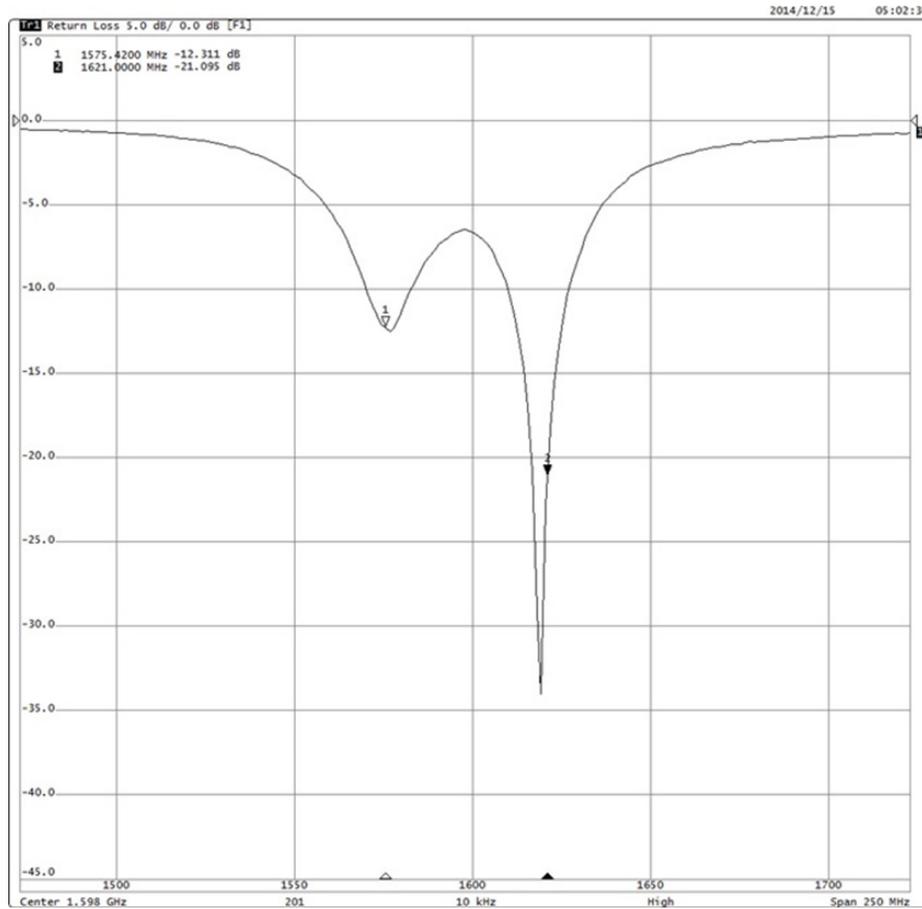

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## VSWR

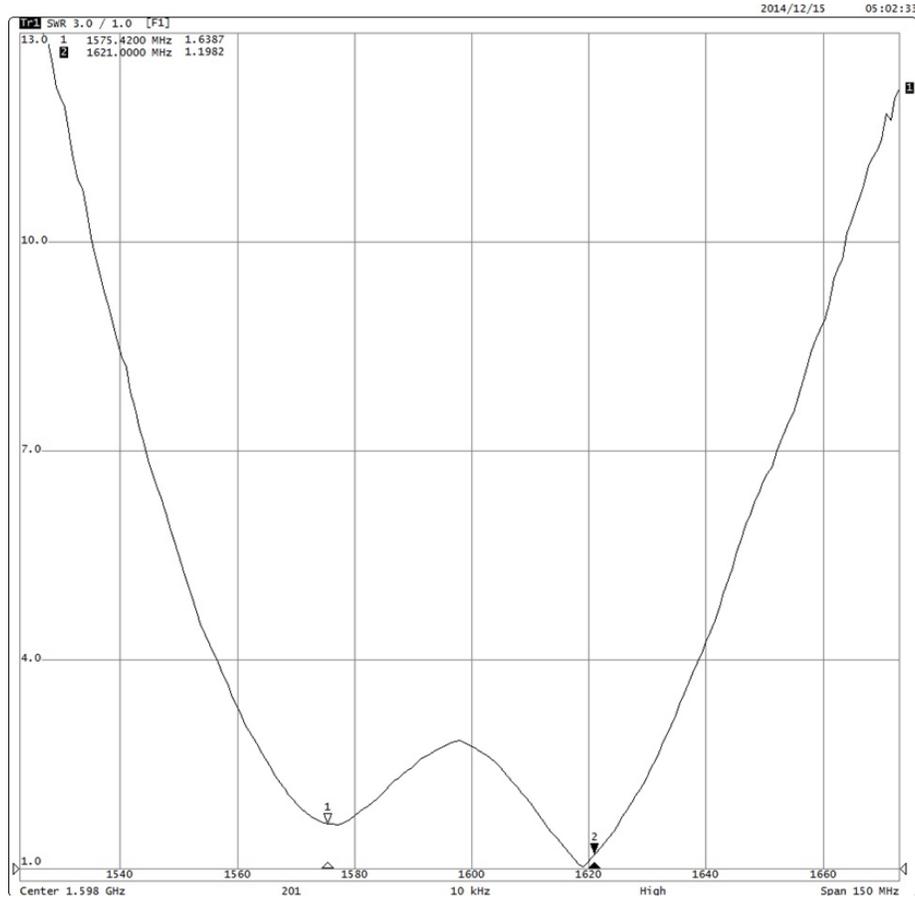

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Impedance Characteristics

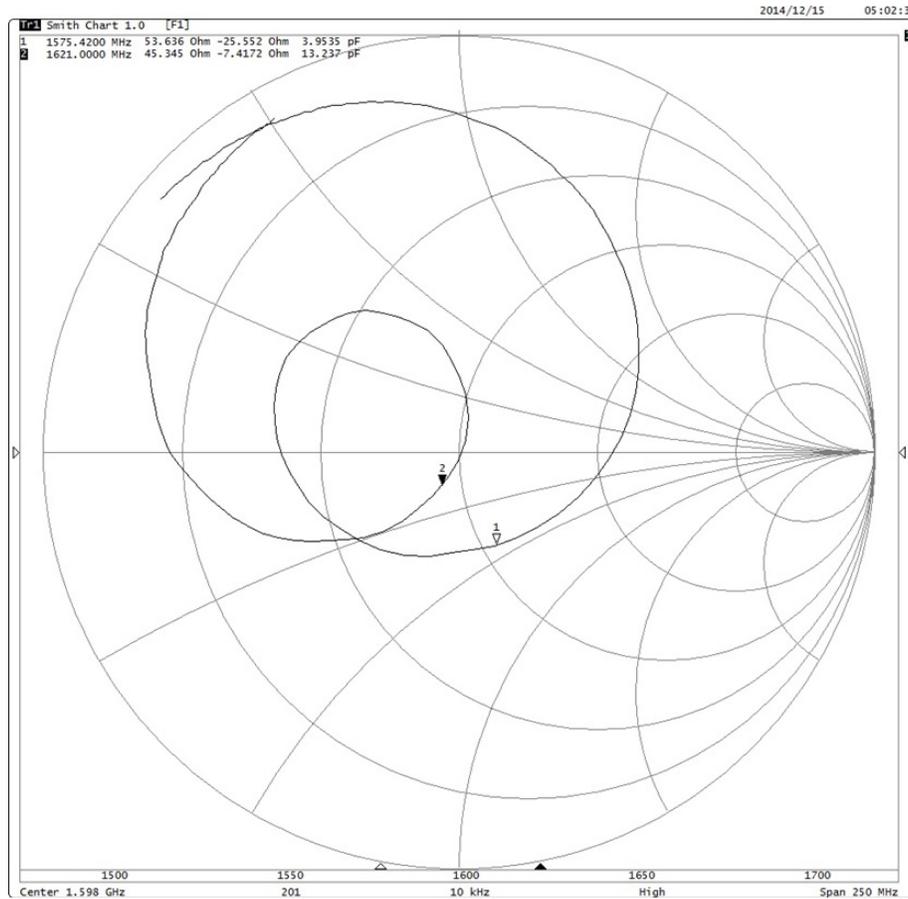

# GPS + Iridium Multiband Ceramic Patch Antenna



APARM2504-C2GR




25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable


## Radiation Pattern

### Measurement Plane

XZ-Plane

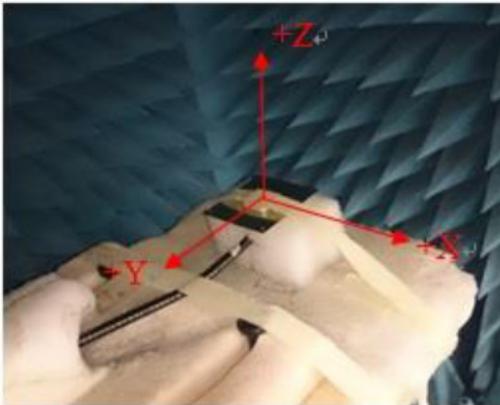

YZ-Plane

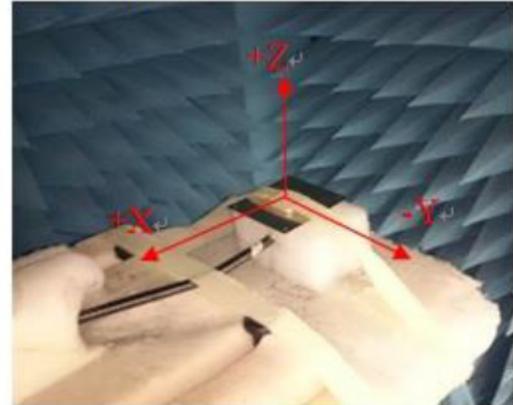

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
 RoHS/RoHS II Compliant  
 MSL = Not Applicable

## Radiation Pattern

GPS : 1575.42 MHz

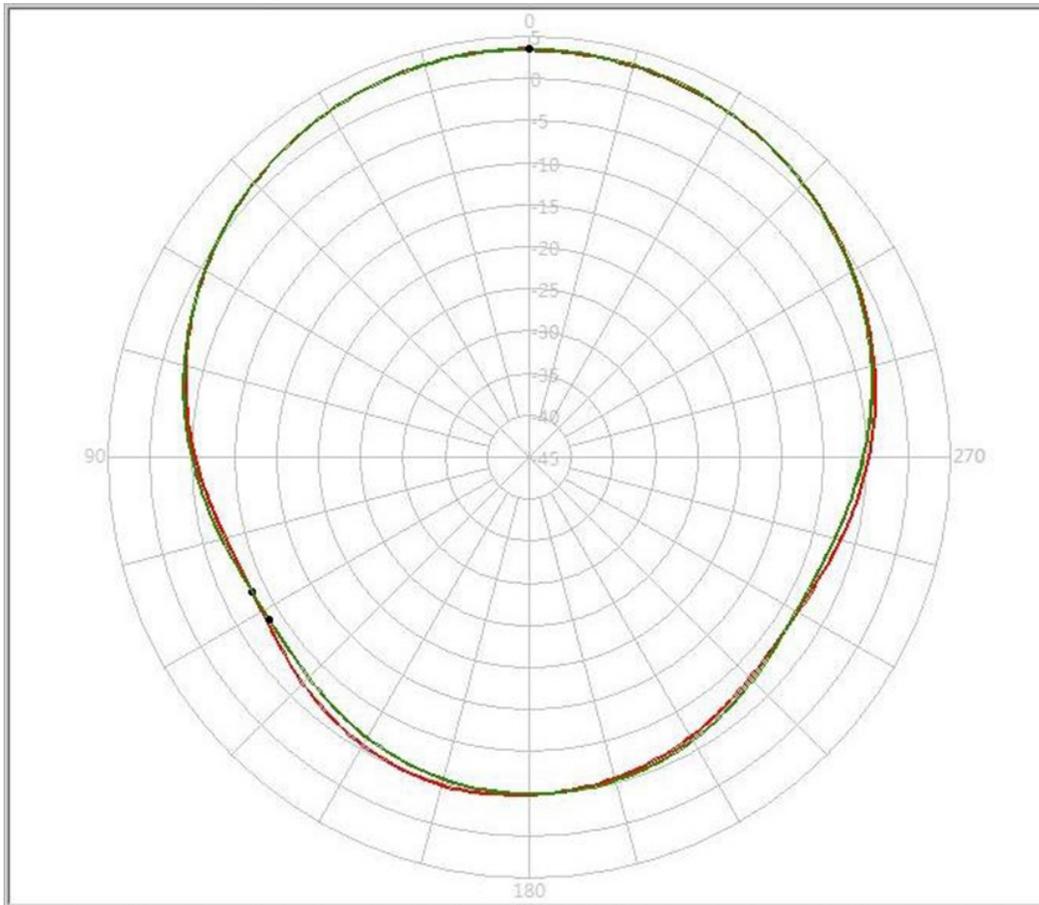

Pattern	Model No.	Test Mode	Freq(MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.
1	APARM2504-C2GR	XZ	1575.42	3.56 / 0.00	-8.44 / 116.00	-1.19	V+H
2	APARM2504-C2GR	YZ	1575.42	3.49 / 0.00	-8.62 / 122.00	-1.21	V+H

# GPS + Iridium Multiband Ceramic Patch Antenna




APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
 RoHS/RoHS II Compliant  
 MSL = Not Applicable

## Radiation Pattern

Iridium : 1621 MHz

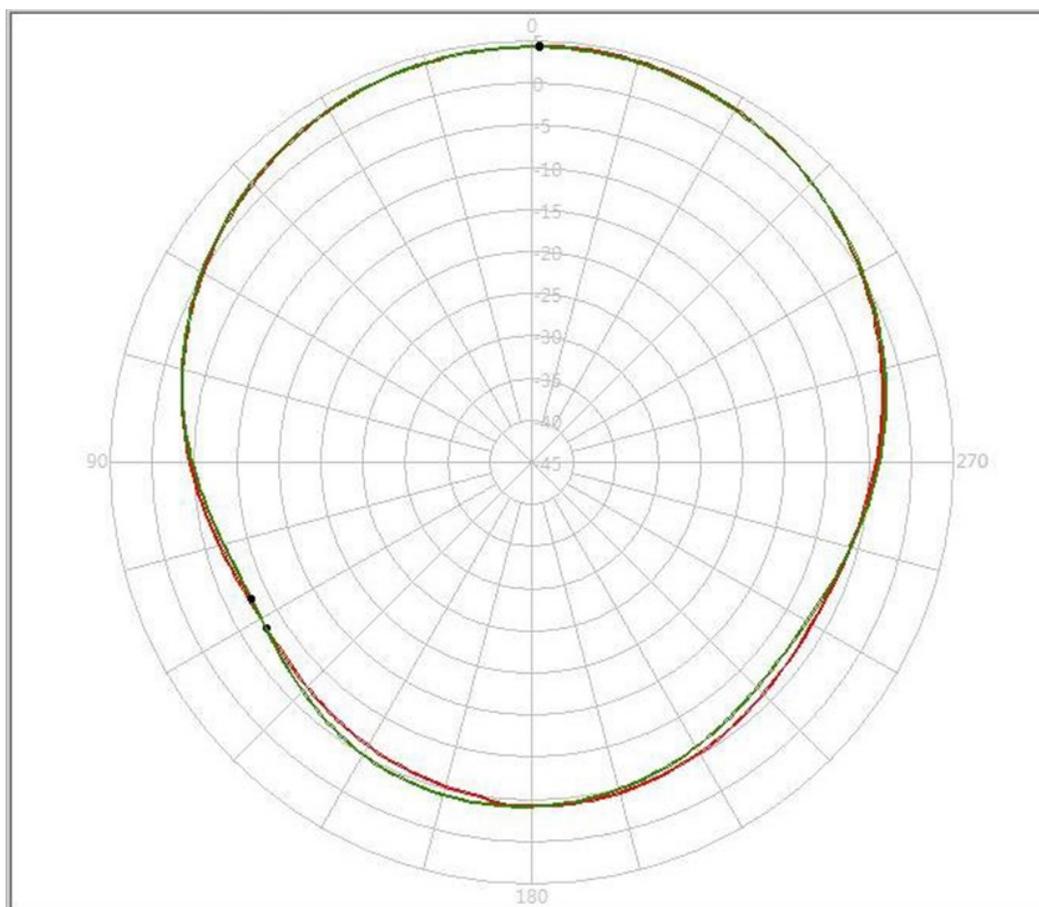

Pattern	Model No.	Test Mode	Freq(MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.
1	APARM2504-C2GR	XZ	1621.00	4.48 / 359.00	-7.91 / 122.00	-0.38	V+H
2	APARM2504-C2GR	YZ	1621.00	4.32 / 359.00	-8.01 / 116.00	-0.36	V+H

# GPS + Iridium Multiband Ceramic Patch Antenna



APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Reliability Test

Test Condition	Test Exposure and Duration
Low Temperature test	Expose the specimen to -40°C for 400 hours and then to normal temperature/ humidity for 24 hours or more. After this test, examine its appearance and functions.
High-temperature test	Expose the specimen to +105°C for 400 hours and then to normal temperature / humidity for 24 hours or more. After this test, examine its appearance and functions.
High-temperature/ high-humidity test	Subject the object to the environmental conditions of +60°C and 90-95% relative humidity for 96 hours, then expose it to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.
Thermal shock test	Subject the object to cyclic temperature change (-40°C for 2 hours, then +85°C for 2 hours) for 100 cycles, then expose to normal temperature/ humidity for 24 hours or more.
Sinusoidal vibration test	Subject the object to vibrations of 5 to 200 to 5Hz swept in 10 minutes, 4.5G at maximum (2 mm amplitude), in X and Y directions for two hours each and in Z direction for four hours. After this test, examine its appearance functions.
Vibration test in packaged condition	Subject the object, which is packaged as illustrated, to vibrations of 15 to 60 to 15Hz swept in 6 minutes, 4G at maximum (2mm amplitude at maximum), applied in X, Y and Z directions for two hours each, i.e. six hours in total. After this test, examine its appearance and functions.
Free fall test in packaged condition	Drop the object, which is packaged as illustrated, to a concrete surface from the height of 90 cm, on one comer, three edges and six faces once each, i.e. 10 times in total. After this test, examine its appearance and functions.
Soldering heat resistance test	After the lead pins of the unit are soaked in solder bath at 260 ± 5°C for 10 seconds. After this test, examine its appearance and functions.
Adhesion test	The device is subjected to be soldered on test PCB. Then apply 0.5 Kg (5N) of force for 5±1 second in the direction of parallel to the substrate (the soldering should be done by reflow and be conducted with care so that the soldering is uniform and free of defect by stress such as heat shock).

# GPS + Iridium Multiband Ceramic Patch Antenna



APARM2504-C2GR



25.1 x 25.1 x 4.0 mm  
RoHS/RoHS II Compliant  
MSL = Not Applicable

## Packaging

---

Each carton holds pieces of antennas and is of dimension 330 x 280 x 254 mm.

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 06-6-19

ABRACON IS  
ISO9001-2015  
CERTIFIED