



TDK SMD MULTI WINDING TRANSFORMER PCA 14.5/6ER SERIES

Mechanical

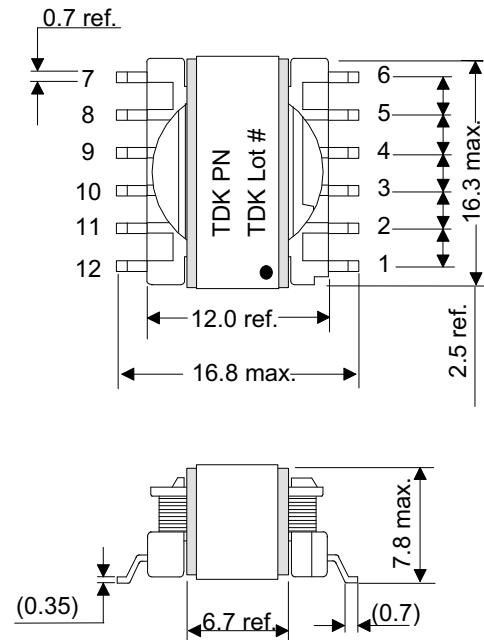

Schematic

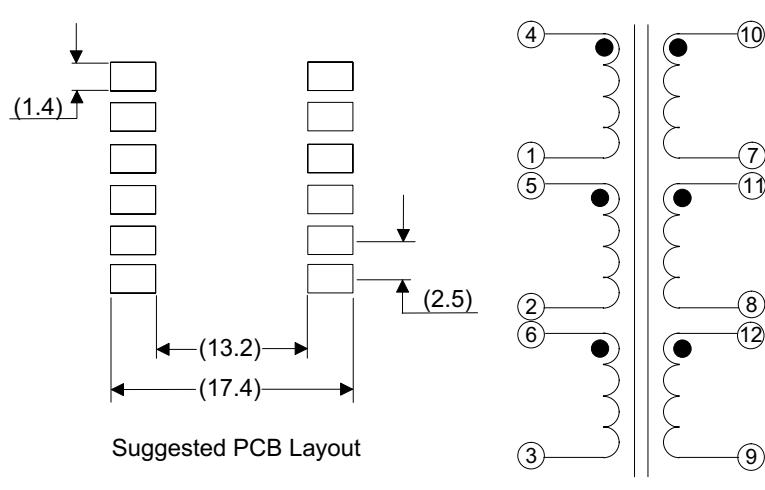

Suggested PCB Layout

1:1:1:1:1:1

| TDK Part Number | Inductance uH @ 10KHz, 0.1 Vrms. | | * ¹ Idc 1 Amps (Typ.) | | * ² Idc 2 Amps (Typ.) | | DCR m Ohms (±15%) | | ET Constant V-μs (Max.) | | Leakage Inductance nH (Typ.) | |
|---------------------|--|--------------------------|--|--------------------------|--|--------------------------|----------------------------|--------------------------|-------------------------------|--------------------------|---------------------------------------|--|
| | * ³ Parallel | * ⁴ Series | * ³ Parallel | * ⁴ Series | * ³ Parallel | * ⁴ Series | * ³ Parallel | * ⁴ Series | * ³ Parallel | * ⁴ Series | Single | |
| PCA14.5/6ER-U01S002 | 160.0±30% | 5.8mH±30% | 0.2 | 0.03 | 5.9 | 0.98 | 18.0 | 662 | 53.0 | 317 | 120 | |
| PCA14.5/6ER-U02S002 | 78.4±30% | 2.8mH±30% | 0.3 | 0.04 | 7.9 | 1.32 | 9.8 | 356 | 37.0 | 222 | 103 | |
| PCA14.5/6ER-U03S002 | 21.6±20% | 778±20% | 3.1 | 0.52 | 5.9 | 1.00 | 18.0 | 662 | 53.0 | 317 | 120 | |
| PCA14.5/6ER-U04S002 | 10.6±20% | 381±20% | 4.8 | 0.80 | 7.9 | 1.32 | 9.8 | 356 | 37.0 | 222 | 103 | |
| PCA14.5/6ER-U05S002 | 11.6±20% | 418±20% | 6.5 | 1.08 | 5.9 | 1.00 | 18.0 | 662 | 53.0 | 317 | 120 | |
| PCA14.5/6ER-U06S002 | 5.7±20% | 205±20% | 8.8 | 1.46 | 7.9 | 1.32 | 9.8 | 356 | 37.0 | 222 | 103 | |
| PCA14.5/6ER-U07S002 | 8.3±20% | 299±20% | 9.6 | 1.60 | 5.9 | 1.00 | 18.0 | 662 | 53.0 | 317 | 120 | |
| PCA14.5/6ER-U08S002 | 4.1±20% | 146±20% | 14.3 | 2.38 | 7.9 | 1.32 | 9.8 | 356 | 37.0 | 222 | 103 | |
| PCA14.5/6ER-U09S002 | 6.6±20% | 238±20% | 12.5 | 2.08 | 5.9 | 1.00 | 18.0 | 662 | 53.0 | 222 | 120 | |
| PCA14.5/6ER-U10S002 | 3.2±20% | 116±20% | 17.5 | 2.92 | 7.9 | 1.32 | 9.8 | 356 | 37.0 | 317 | 103 | |

Electrical Specifications @ 23 degrees C

*¹ Idc 1 = Depend on inductance saturation . (-30% reduction from nominal L value)

*² Idc 2 = Depend on self temperature rise. (40 degC typ at specified Idc2)

*³ Parallel 6 coils connected in parallel.

*⁴ Series 6 coils connected in series.

Hi - Pot between each individual coil to the other five 500 Vac, 60s, 2mA.

Operating Temperature -40 degC to +85 degC.

RoHS Compliant :

Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used except for exempted applications.



TDK USA Corporation / Component Engineering Laboratory

Copyright© 1997- 2006 TDK USA CORPORATION. All rights reserved.

rev May 05' 06