

H G F E D C B A

4

3

2


1

4


3

2

1

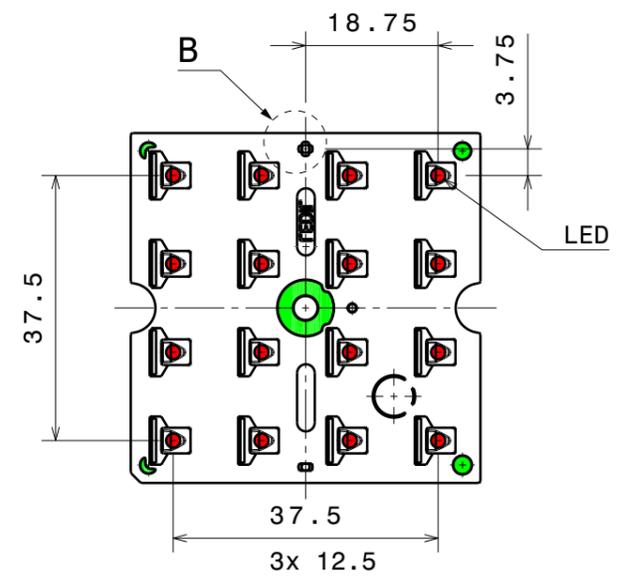

Note:  
corner cut



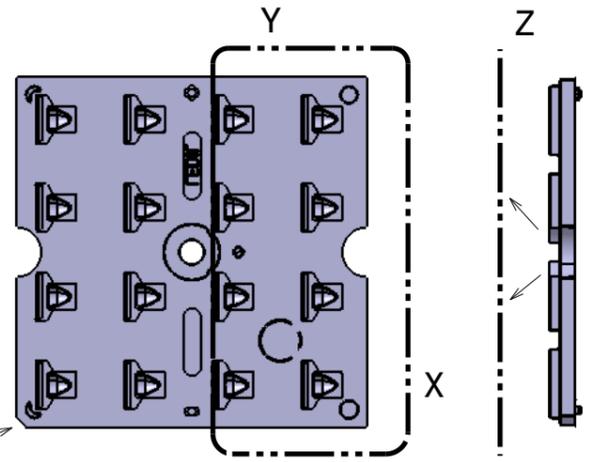


Light Pattern Direction


LENS: Recommended  
screw M3 for fixing  
Use washer with screw if possible

STRADELLA-16 lens

PCB fixing: space for  
screw head

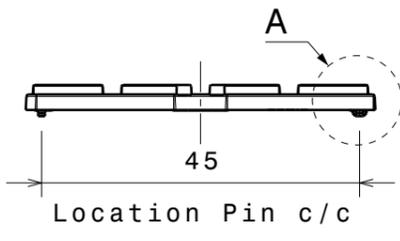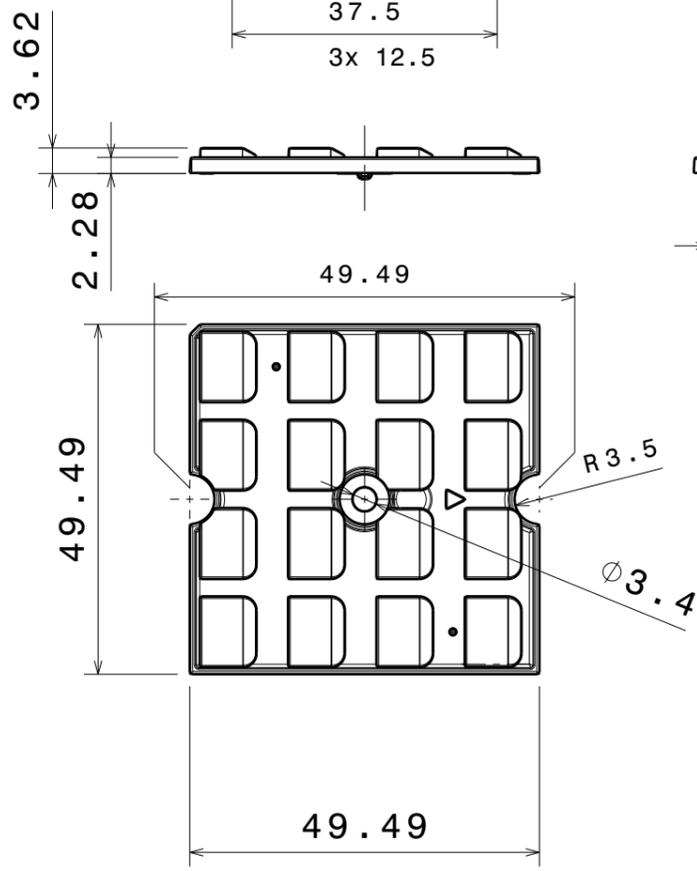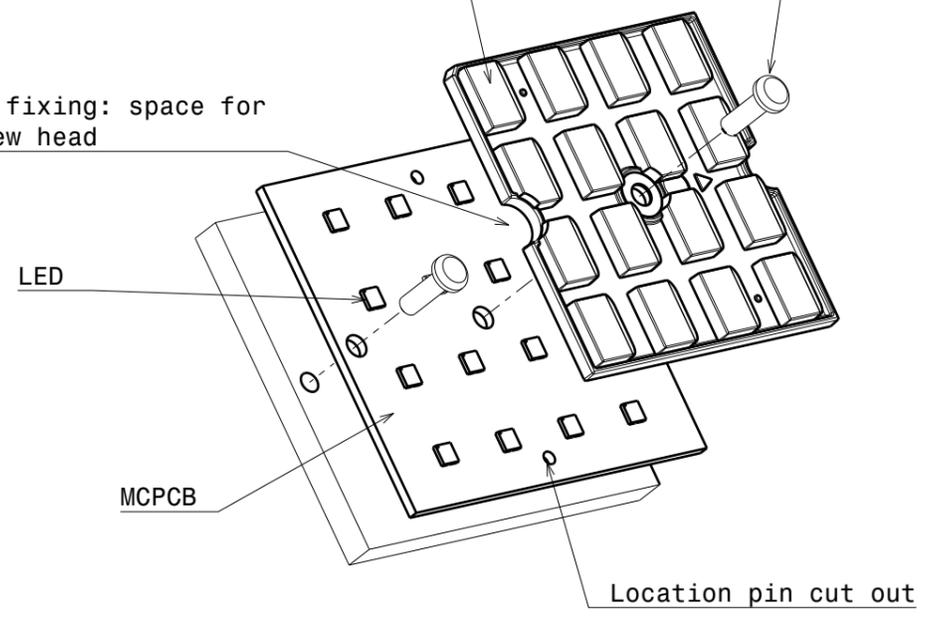

Detail A  
Scale: 2:1



Detail B  
Scale: 2:1

**Notes**

1	PCB or heatsink level.
2	LED location.
3	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a> .

PART	TYPE	MATERIAL	COLOR / COATING
C16503_STRADELLA-16-T3	LENS	PMMA	CLEAR

<b>MECHANICAL DRAWING</b>	
PRODUCT	<b>STRADELLA</b>
Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L	FIRST ANGLE PROJECTION: 
SCALE 1:1	WEIGHT 5,6 g

**LEDiL**®

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

A3 SHEET 1/1

H G B A