



REED SWITCH DEVELOPMENTS CORP.

2524 Norwood Court
Racine, WI 53403
Ph: (262)883-9060

sales@reedswitchdevelopments.com

SPECIFICATION SHEET

2020-1710-400

Alternate Part Number:

AM2020-1710-10K01

Active / Equivalent Part Numbers:

2020-1710-400 - KIT - Contains

(1) 2020-1710-100 - Magnetic Reed Sensor

(1) 2020-4100-000 - Magnetic Actuator


AM2020-1710-10K01 - KIT - Contains

(1) AM2020-1710-10-01 - Magnetic Reed Sensor

(1) AM2020-4100-00-01 - Magnetic Actuator

Sensor (Reed) - Specifications 1901

Physical		Operating		Electrical	
Configuration	SPDT	DC Contact Rating	100	W	
Form	C	AC Contact Rating	N/A	VA	
Contact Position	OFFSET	DC Switching Voltage	120	VDC	
Glass L	32.89	AC Switching Voltage	85	VAC	
Glass D	5.33	DC Switching Current	3.00	A	
Total L*	85.98	AC Switching Current	3.00	A	
Wire D	1.02	DC Max Carry Current	3.60	A	
Gap Location	N/A	AC Max Carry Current	3.60	A	
Mount Spec*	THRU	Min Breakdown Voltage	150	VDC	
Contact Material	TUNGSTEN	Max Initial Contact Resistance	500	mOhm	
Max Vibration Resistance	N/A	Typical Initial Contact Resistance	N/A	mOhm	
Max Shock Resistance (11ms)	N/A	Max Contact Capacitance	1.60	pF	
Lead Tensile Strength	N/A	Min Insulation Resistance	10 ¹⁰	Ohm	
Pull in (+/- 2AT)*	50 - 65				
Drop out*	N/A				
Operate Time	4.00				
Bounce Time	N/A				
Release Time	3.90				
Resonant Frequency	N/A				
Max Operating Frequency	N/A				
Operating Temperature Range	-40 - 105				
Storage Temperature	N/A				

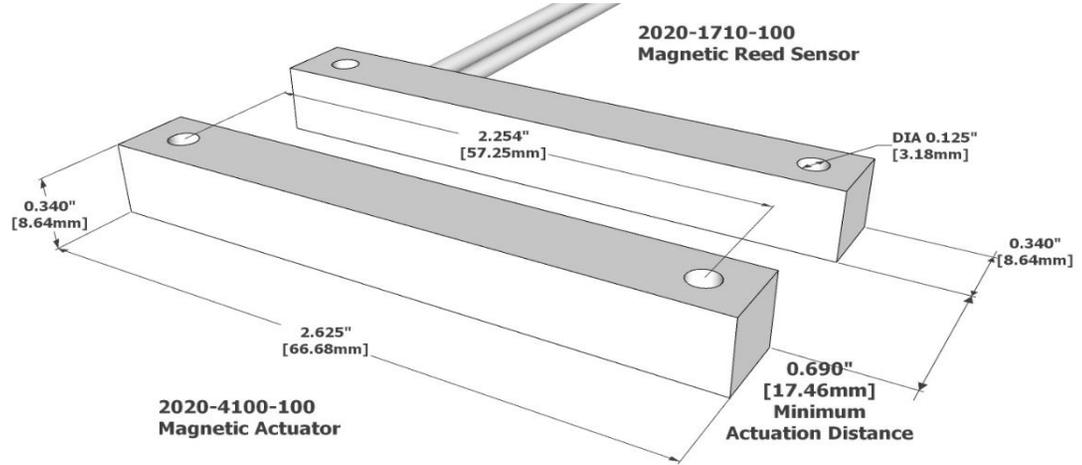

All measurements are in Inches [millimeters]

Sensor - Wire/Cable Characteristics (cont.)

Type	Wire
Conductor Count	3
Length	6.0"/152.4mm
Colors	RED, BLK, WHT
Insulation Material	PVC
Gauge	24 AWG
Stranded Copper	7 STR-TC
Maximum Temp	105°C

Conductor Configuration

Common (COM) - WHITE	
Normally Open (NO) - RED	
Normally Closed (NC) - BLACK	

Housing Characteristics 2020

Rectangular w/ Mounting Holes	
Length	2.625"/66.68mm
Width	0.340"/8.64mm
Height	0.340"/8.64mm
Material	Celanex 3316

Standard Actuator: 2020-4100-000

Specifications	Description	UM
Magnetic Orientation	Through Length	
Max Operating Temp.	975/525	°F/°C
Curie Temp.	1580/860	°F/°C
BR max	12.8	kGauss
BH max	5.5	MGOe
Coercive Force Hc	640	kOe
Intrinsic Coercive Force Hci	640	kOe

Std. Sensor/Actuator - Min. Actuation Dist.

2020-4100-000	0.69"/17.5mm
---------------	--------------

Assembly Certifications

UL Recognized (File #: E102207)	Y
RoHS / REACH Compliant	Y
Conflict Free Material	Y

REV DATE: 10/06/2021

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

WBE Certified - State of Wisconsin - MFR CAGE CODE: 32604

www.reedswitchdevelopments.com