




2.3" 5 × 8 DOT MATRIX DISPLAYS


**YELLOW GMA 2885C GMC 2885C
HER GMA 2985C GMC 2985C
GREEN GMA 2485C GMC 2485C
BICOLOR RED/GREEN GMA 2685C**

PACKAGE DIMENSIONS

A. GMX2X85C

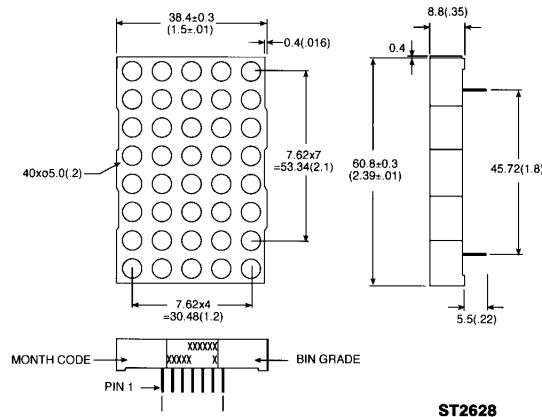

B. GMA2685C

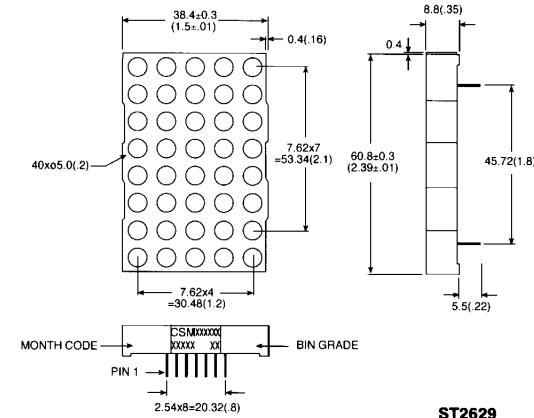

DESCRIPTION

These are 5×8 dot matrix displays with large emitting area (0.2" diameter) LED sources. The GMX2X85C series are single color displays with the exception of GMA2685C which is a bicolor of red/green displays.

All displays have gray face and white dot color. Other face or dot colors are available with minimum requirement.

The X in GMX denotes row anode or row cathode.

FEATURES

- 2.3" (58.4 mm) character height
- Low power requirement
- High contrast & brightness
- Wide viewing angle 130°
- 5 × 8 array with X-Y select
- Compatible with USASCII and EBCDIC codes
- X-Y stackable
- Choice of two matrix orientation anode or cathode column
- Easy mounting on PCB
- Categorized for luminous intensity
- Single color displays have the choice of 3 bright colors — yellow/orange/green
- Multicolor color displays are applicable to 3 bright colors — greens, orange (HER) and yellow (green and HER mixed)

NOTES:

1. ALL PINS ARE 00.5 (.02).
2. DIMENSIONS IN MILLIMETERS (INCH), TOLERANCE IS ±0.25 (.01) UNLESS OTHERWISE NOTED.



**2.3" 5 × 8
DOT MATRIX DISPLAYS**

ABSOLUTE MAXIMUM RATING (T_A = 25°C unless otherwise specified)

| PARAMETER | YELLOW | HER | GREEN | UNITS |
|--|--------|-----|-------|----------------|
| Power dissipation per dot/color | 60 | 70 | 75 | mW |
| Peak forward current per dot/color (duty cycle 1/10, 10KHz) | 80 | 100 | 100 | mA |
| Continuous I _F per dot/color | 20 | 25 | 25 | mA |
| Reverse voltage V _R per dot/color | 5 | 5 | 5 | V |
| Operating and storage temperature range | | | | -25°C to +85°C |
| Soldering time at 260°C (1/16 inch below seating plane) | | | | 3 sec |

MODEL NUMBERS

| PART NO. | DESCRIPTION | | | PACKAGE DIMENSION | INTERNAL CIRCUIT DIAGRAM |
|----------|-------------|----------|----------|-------------------|--------------------------|
| | YELLOW | HER | GREEN | | |
| GMC2885C | GMC2985C | GMC2485C | | A | A |
| GMA2885C | GMA2985C | GMA2485C | GMA2685C | A | B |
| | | | | B | C |

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)
GMX 2485C

| PARAMETER | MIN. | TYP. | MAX. | UNITS | TEST CONDITIONS |
|----------------------------|------|------|------|----------------|-----------------------|
| Average luminous intensity | 3000 | | | μcd | $I_F = 20 \text{ mA}$ |
| Peak emission wavelength | 565 | | | nm | $I_F = 20 \text{ mA}$ |
| Spectral line half-width | 30 | | | nm | $I_F = 20 \text{ mA}$ |
| Forward voltage, any dot | 2.1 | 2.8 | | V | $I_F = 20 \text{ mA}$ |
| Reverse voltage, any dot | 100 | | | μA | $V_R = 5 \text{ V}$ |

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES
($T_A = 25^\circ\text{C}$ Unless otherwise specified)

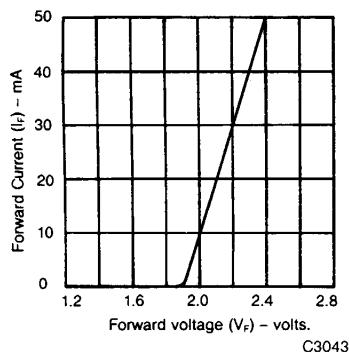


Fig. 1. Forward Current vs.
Forward Voltage

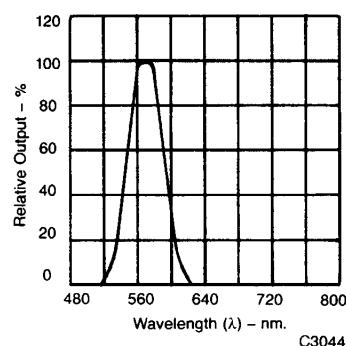


Fig. 2. Spectral Response

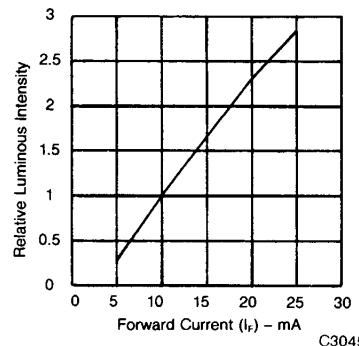


Fig. 3. Relative Luminous Intensity vs.
Forward Current

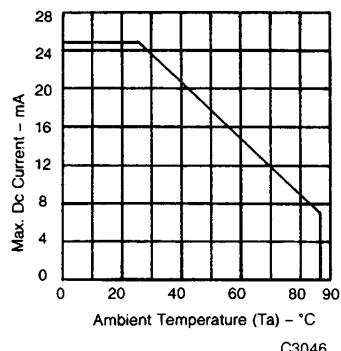


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

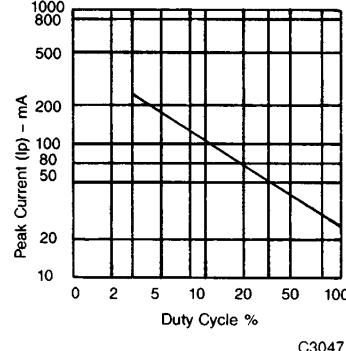


Fig. 5. Max Peak Current vs. Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

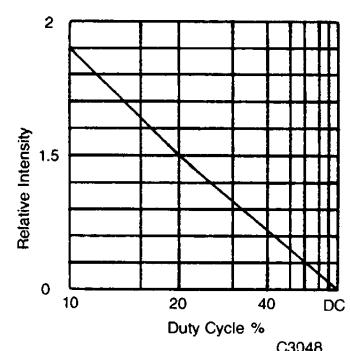


Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average $I_F = 10 \text{ mA}$ Per Seg.)

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)
GMX 2985C

| PARAMETER | MIN. | TYP. | MAX. | UNITS | TEST CONDITIONS |
|----------------------------|------|------|------|----------------|---------------------|
| Average luminous intensity | 3000 | | | μcd | $I_F=20 \text{ mA}$ |
| Peak emission wavelength | 635 | | | nm | $I_F=20 \text{ mA}$ |
| Spectral line half-width | 30 | | | nm | $I_F=20 \text{ mA}$ |
| Forward voltage, any dot | 2.1 | 2.8 | | V | $I_F=20 \text{ mA}$ |
| Reverse voltage, any dot | 100 | | | μA | $V_R=5 \text{ V}$ |

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ Unless otherwise specified)

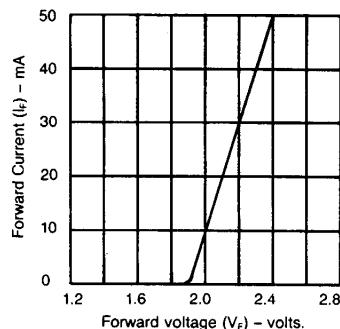


Fig. 1. Forward Current vs.
Forward Voltage

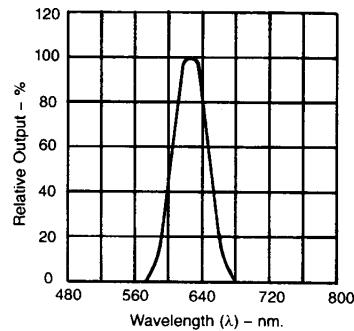


Fig. 2. Spectral Response

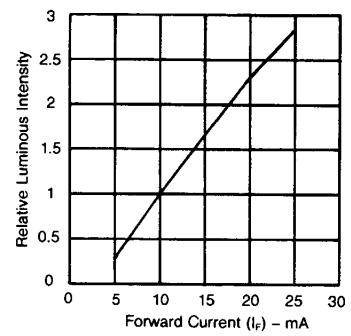


Fig. 3. Relative Luminous Intensity vs.
Forward Current

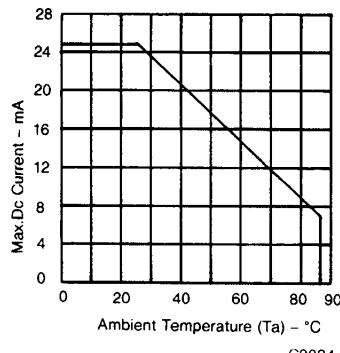


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

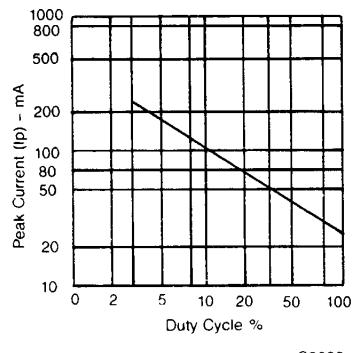


Fig. 5. Max. Peak Current vs.
Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

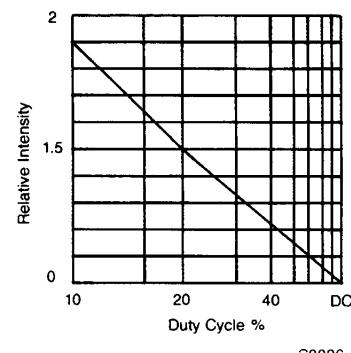


Fig. 6. Luminous Intensity vs.
Duty Cycle %

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)
GMX 2885C

| PARAMETER | MIN. | TYP. | MAX. | UNITS | TEST CONDITIONS |
|----------------------------|------|------|------|----------------|-----------------------|
| Average luminous intensity | 3000 | | | μcd | $I_F = 20 \text{ mA}$ |
| Peak emission wavelength | 585 | | | nm | $I_F = 20 \text{ mA}$ |
| Spectral line half-width | 30 | | | nm | $I_F = 20 \text{ mA}$ |
| Forward voltage, any dot | 2.1 | 2.8 | | V | $I_F = 20 \text{ mA}$ |
| Reverse voltage, any dot | 100 | | | μA | $V_R = 5 \text{ V}$ |

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES
($T_A = 25^\circ\text{C}$ Unless otherwise specified)

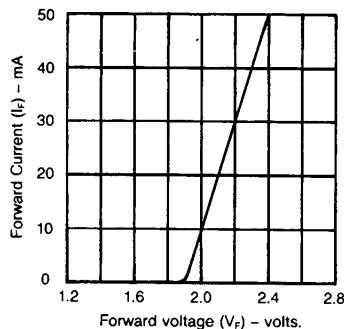


Fig. 1. Forward Current vs.
Forward Voltage

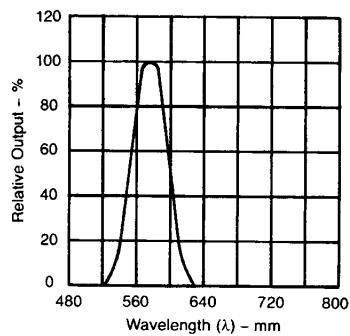


Fig. 2. Spectral Response

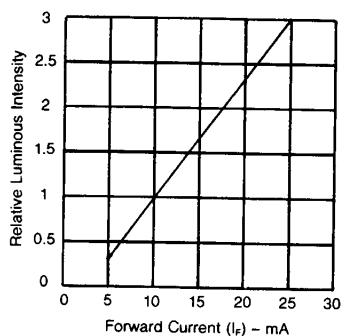


Fig. 3. Relative Luminous Intensity vs.
Forward Current

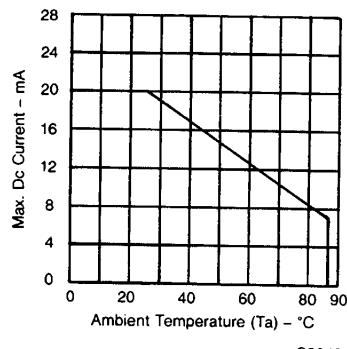


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

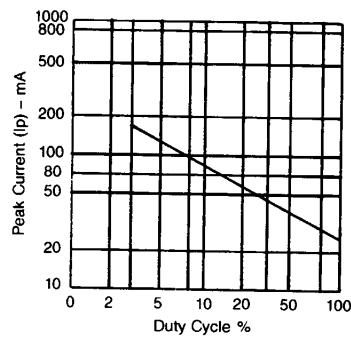


Fig. 5. Max Peak Current vs. Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

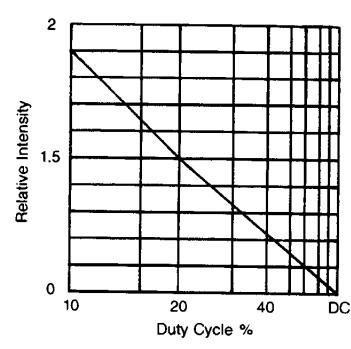


Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average 1=10 mA Per Seg.)




**2.3" 5 × 8
DOT MATRIX DISPLAYS**

PIN CONNECTION


| PIN NO. | GMC2X85C | GMA2X85C | GMC2685C |
|---------|----------------|------------------|------------------------|
| 1 | Cathode row 6 | Anode row 6 | Cathode column 1 green |
| 2 | Cathode row 8 | Anode row 8 | Cathode column 2 green |
| 3 | Anode column 2 | Cathode column 2 | Cathode column 2 HER |
| 4 | Anode column 3 | Cathode column 3 | Cathode column 3 HER |
| 5 | Cathode row 5 | Anode row 5 | Anode row 6 |
| 6 | Anode column 5 | Cathode column 5 | Anode row 7 |
| 7 | Cathode row 7 | Anode row 7 | Cathode column 4 HER |
| 8 | Cathode row 3 | Anode row 3 | Anode row 5 |
| 9 | Cathode row 1 | Anode row 1 | Anode row 8 |
| 10 | Anode column 4 | Cathode column 4 | Cathode column 5 green |
| 11 | Anode column 3 | Cathode column 3 | Cathode column 5 HER |
| 12 | Cathode row 4 | Anode row 4 | Cathode column 4 green |
| 13 | Anode column 1 | Cathode column 1 | Anode column 3 green |
| 14 | Cathode row 2 | Anode row 2 | Anode row 4 |
| 15 | | | Anode row 2 |
| 15 | | | Anode row 1 |
| 15 | | | Anode row 3 |
| | | | Cathode column 1 HER |

INTERNAL CIRCUIT DIAGRAM


A. GMC2X85C

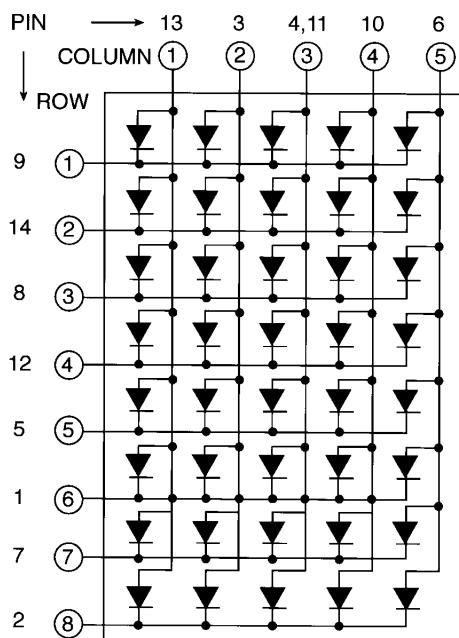

B. GMA2X85C

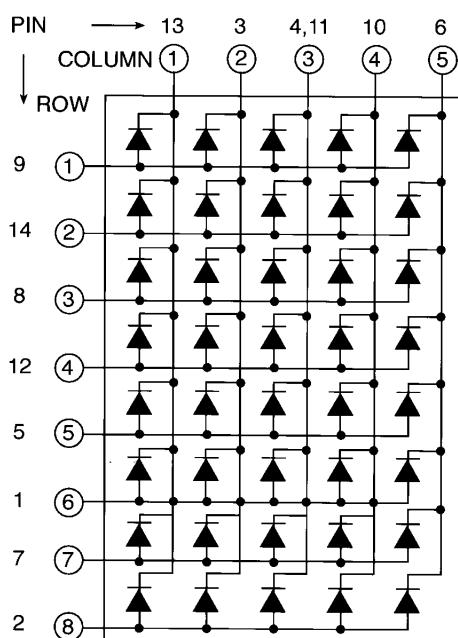

C. GMA2685C

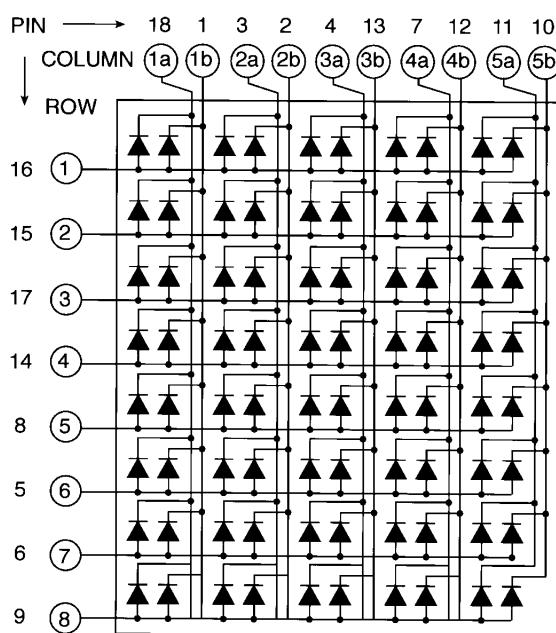



2.3" 5 X 8
DOT MATRIX DISPLAYS

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.