

G3VM-21HR/31HR/31HR1/41HR

MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type


MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- Load voltage: 20 V, 30 V or 40 V
- 20-V Relay (21HR): Continuous load current of 2.5 A (5 A) max. *
- 30-V Relay (31HR): Continuous load current of 4 A (8 A) max. *
- 30-V Relay (31HR1): Continuous load current of 4.5 A (9 A) max. *
- 40-V Relay (41HR): Continuous load current of 2.5 A (5 A) max. *

* Values in parentheses are for connection C.

S
O
P

RoHS Compliant

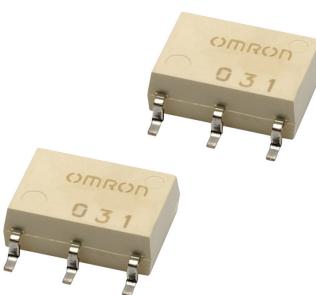

Note: The actual product is marked differently from the image shown here.


G
3
V
M
-
2
1
H
R
/
3
1
H
R
1
/
4
1
H
R

■Application Examples

- Semiconductor test equipment
- Security equipment
- Amusement equipment
- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit

■Package (Unit : mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□ □ □ □ □
1 2 3 4 5

- | | | |
|-------------------------|------------------|--|
| 1. Load Voltage | 2. Contact form | 3. Package |
| 2 : 20 V | 1 : 1a (SPST-NO) | H : SOP 6-pin |
| 3 : 30 V | | |
| 4 : 40 V | | |
| 4. Additional functions | | 5. Other informations |
| R: Low ON resistance | | When specifications overlap, serial code is added in the recorded order. |

■Ordering Information

Package	Contact form	Terminals	Load voltage (peak value)*	Continuous load current (peak value)*		Stick packaging		Tape packaging	
				Connection A, B	Connection C	Model	Minimum package quantity	Model	Minimum package quantity
SOP6	1a (SPST-NO)	Surface-mounting Terminals	20 V	2.5 A	5 A	G3VM-21HR	75	G3VM-21HR(TR)	2,500
			30 V	4 A	8 A	G3VM-31HR		G3VM-31HR(TR05)	500
			30 V	4.5 A	9 A	G3VM-31HR1		G3VM-31HR1(TR05)	
			40 V	2.5 A	5 A	G3VM-41HR		G3VM-41HR(TR)	2,500

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item		Symbol	G3VM-21HR	G3VM-31HR	G3VM-31HR1	G3VM-41HR	Unit	Measurement conditions
Input	LED forward current	I_F	30				mA	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3				mA/ $^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V_R	5		6	5	V	
	Connection temperature	T_J	125				$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	V_{OFF}	20	30		40	V	
	Continuous load current	I_O	2500	4000	4500	2500	mA	Connection A: AC peak/DC Connection B and C: DC
			5000	8000	9000	5000		
	ON current reduction rate	$\Delta I_O/^\circ\text{C}$	-33.3	-40	-45	-33.3	mA/ $^\circ\text{C}$	G3VM-31HR/31HR1: $T_a \geq 25^\circ\text{C}$ Others: $T_a \geq 50^\circ\text{C}$
			-66.7	-80	-90	-66.7		
			7.5	12	13.5	7.5		
	Pulse ON current	I_{OP}	125				A	$t=100\text{ ms}, \text{Duty}=1/10$
	Connection temperature	T_J	125				$^\circ\text{C}$	
Dielectric strength between I/O *		V_{I-O}	1500				Vrms	AC for 1 min
Ambient operating temperature		T_a	-40 to +85	-40 to +110	-40 to +85	$^\circ\text{C}$		
Ambient storage temperature		T_{STG}	-55 to +125				$^\circ\text{C}$	With no icing or condensation
Soldering temperature		-	260				$^\circ\text{C}$	10 s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

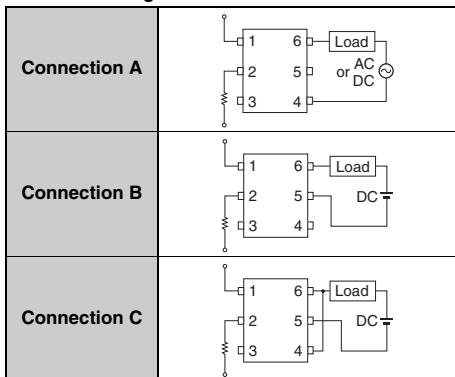


S
O
P

G
3
V
M
-
2
1
H
R
/
3
1
H
R
/
3
1
H
R
1
/
4
1
H
R

■Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item		Symbol		G3VM-21HR	G3VM-31HR	G3VM-31HR1	G3VM-41HR	Unit	Measurement conditions		
Input	LED forward voltage	VF	Minimum	1.18		1.50	1.18	V	$I_F=10 \text{ mA}$		
			Typical	1.33		1.65	1.33				
			Maximum	1.48		1.80	1.48				
Reverse current		I_R	Maximum	10				μA	$V_R=5 \text{ V}$		
Capacitance between terminals		C_T	Typical	70				pF	$V=0, f=1 \text{ MHz}$		
Output	Trigger LED forward current	I_{FT}	Typical	–	0.3	0.4	mA	G3VM-31HR1 : $I_O=1000 \text{ mA}$ Others : $I_O=100 \text{ mA}$			
			Maximum	3							
Release LED forward current		I_{FR}	Minimum	0.1				mA	$I_{OFF}=10 \mu\text{A}$		
Output	Maximum resistance with output ON	Ron	Connection A	0.02	0.02	0.022	0.03	Ω	G3VM-31HR: $I_F=5 \text{ mA}$ $I_O=4 \text{ A}$ (Connection A, B) $I_O=8 \text{ A}$ (C connections), $t < 1 \text{ s}$ G3VM-31HR1: $I_F=5 \text{ mA}$ $I_O=4.5 \text{ A}$ (Connection A, B) $I_O=9 \text{ A}$ (C connections), $t < 1 \text{ s}$ Others: $I_F=5 \text{ mA}$ $I_O=2 \text{ A}$ (Connection A, B) $I_O=4 \text{ A}$ (C connections), $t < 1 \text{ s}$		
				0.01	0.008	0.011	0.015				
				0.005	0.004	0.006	0.008				
			Connection C	0.05	0.04	0.03	0.06				
				0.025	0.02	0.015	0.03				
				–	0.01	0.008	–				
	Current leakage when the relay is open		I_{LEAK}	Typical	–				nA		
				Maximum	10	1000	10	pF	$V_{OFF}=\text{Load voltage ratings}$		
	Capacitance between terminals		C_{OFF}	Typical	1000	1100	1200				
				Maximum	–				pF		
Capacitance between I/O terminals		C_{I-O}	Typical	0.8							
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1000				$\text{M}\Omega$	$f=1 \text{ MHz}, V_s=0 \text{ V}$ $V_{I-O}=500 \text{ VDC}, \text{RoH}\leq 60\%$		
			Typical	10 ⁸							
Turn-ON time		t_{ON}	Typical	1.5	1.1	0.6	1.0	ms	G3VM-21HR : $I_F=5 \text{ mA}, R_L=200 \Omega$, $V_{DD}=10 \text{ V} *$ Others : $I_F=5 \text{ mA}, R_L=200 \Omega$, $V_{DD}=20 \text{ V} *$		
			Maximum	5							
Turn-OFF time		t_{OFF}	Typical	0.1							
			Maximum	0.15							

* Turn-ON and Turn-OFF Times

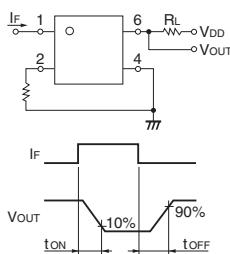

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-21HR	G3VM-31HR	G3VM-31HR1	G3VM-41HR	Unit		
Load voltage (AC peak/DC)	V_{DD}	Maximum	20	24		40	V		
Operating LED forward current	I_F	Minimum	5				mA		
		Typical	10						
		Maximum	20	25	20				
Continuous load current (AC peak/DC)	I_O	Maximum	2000	4000	4500	2000			
Ambient operating temperature		Minimum	-20				${}^\circ\text{C}$		
		Maximum	65		85	65			

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	
Clearance distances	4.0	mm
Internal isolation thickness	0.1	

■Engineering Data


● LED forward current vs.
Ambient temperature

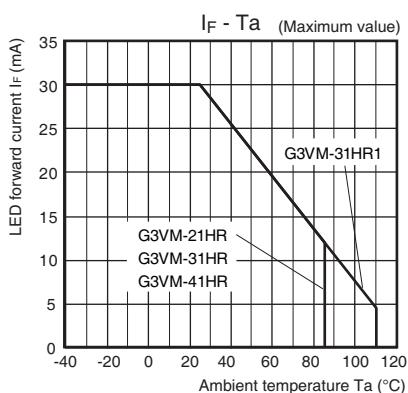

● Continuous load current vs.
Ambient temperature
G3VM-21HR/41HR

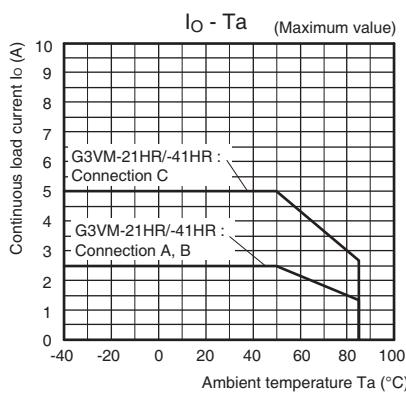


G3VM-31HR/31HR1

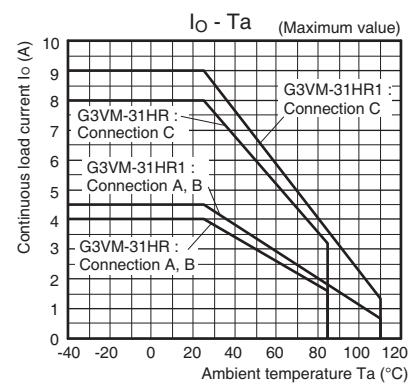


S
O
P

G
3
V
M
-
2
1
H
R
/
3
1
H
R
/
3
1
H
R
1
/
4
1
H
R


● LED forward current vs.
LED forward voltage

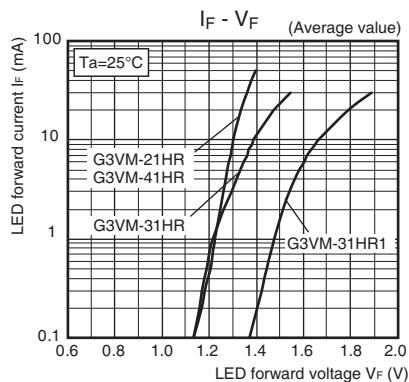


● Continuous load current vs.
On-state voltage

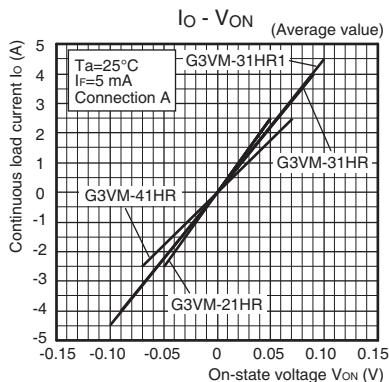


● On-state resistance vs.
Ambient temperature

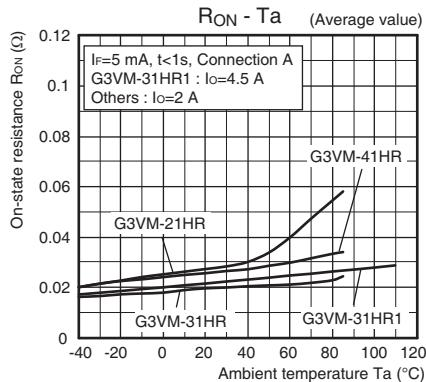


● Trigger LED forward current vs.
Ambient temperature

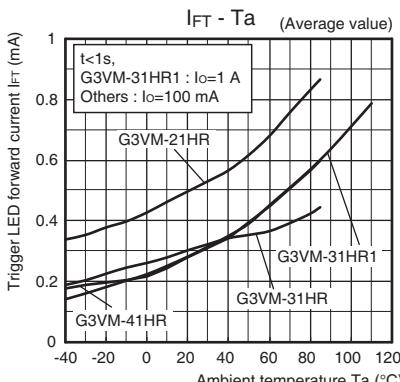

● Turn ON, Turn OFF time vs.
LED forward current

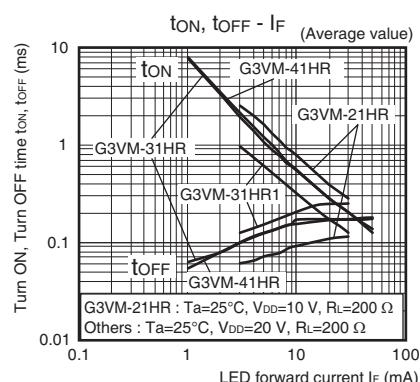


● Turn ON, Turn OFF time vs.
Ambient temperature

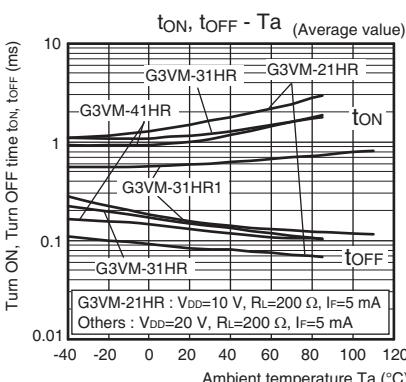


■Engineering Data

● Current leakage vs. Load voltage

G3VM-21HR/41HR

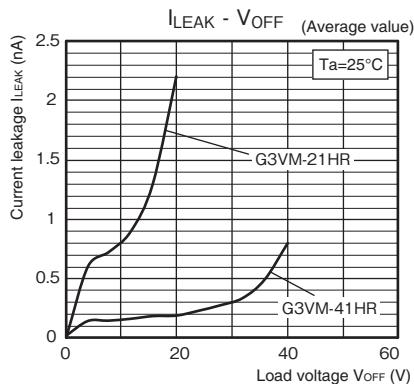


G3VM-31HR1

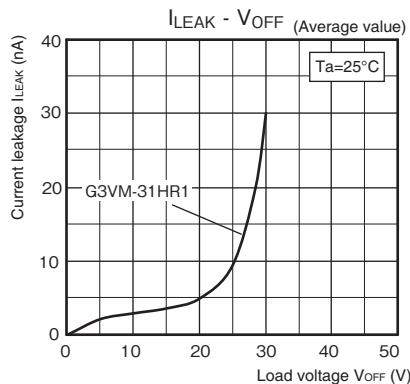

S
O
P

● Current leakage vs. Ambient temperature


G3VM-31HR/31HR1

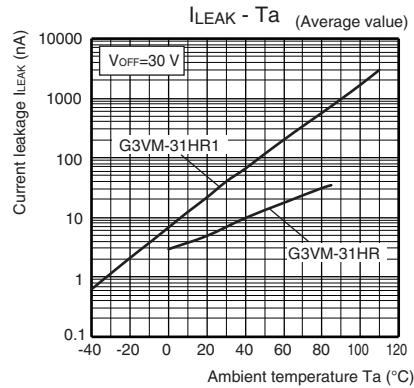

G
3
V
M
-
2
1
H
R
/
3
1
H
R
1
/
4
1
H
R

● Output terminal capacitance vs. Load voltage

G3VM-21HR/31HR1/41HR

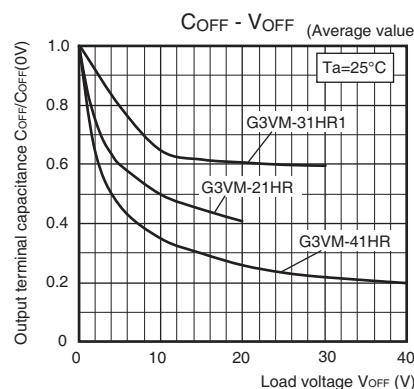


■Appearance / Terminal Arrangement / Internal Connections

●Appearance

SOP (Small Outline Package)

SOP 6-pin

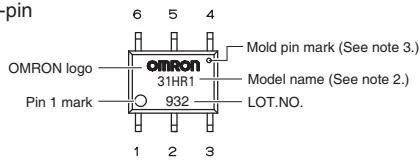


Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)




■Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.13 g

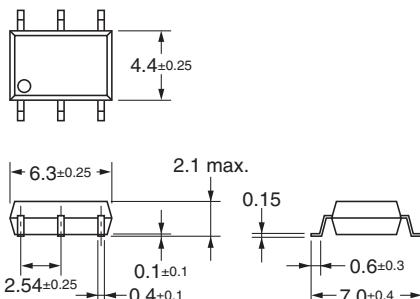

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>

S
O
P

G
3
V
M
-
2
1
H
R
/
3
1
H
R
1
/
4
1
H