

Snap-in socket; 3-pole; Cod. B; 1,50 mm<sup>2</sup>; pink

www.wago.com/890-783



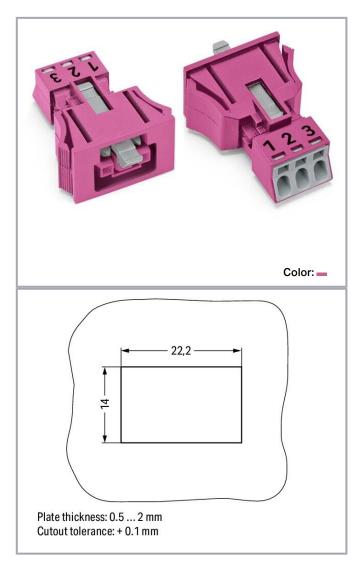

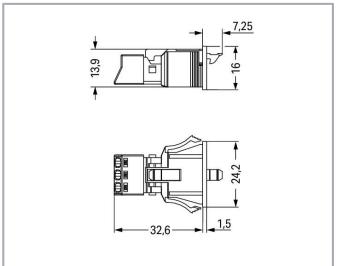

# Item description

### Female connector/socket WINSTA® MINI rated current 16 A

For signal and power transmission: The WINSTA® MINI female connector/socket with protection against mismating. WAGO pluggable installation

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/890-783



connectors are used when criteria repeat or are planned on a defined grid, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected in accordance with protection type IP40. Users' fingers and tools will never come into contact with live elements. Solutions like the WINSTA® MINI pluggable installation connectors with B coding are suitable for applications related to process control, for example, for lighting or in data networks. Particularly where space is tight, our smallest pluggable connection system, WINSTA® MINI, consistently displays its advantageous properties. It saves space, and, with Push-in CAGE CLAMP® spring pressure connection technology, it also can be installed quickly, since the connection is low-maintenance and can be performed without screw connections.

# Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, even more reliable, and error-free. Use of this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MINI pluggable installation connectors with protection type IP40 from WAGO.

- effective protection against mismating
- consistent IP40 protection
- for automation controllers
- ready for immediate use
- fast, secure installation

# Data Notes

Variants:	Other pole markings
	Other versions (or variants) can be requested from WAGO Sales or
	configured at https://configurator.wago.com/.

## **Electrical data**

## Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	16 A
Note (rated current)	13 A for 3-pole load
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/890-783



# Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 5 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	14 A

#### General

Note on contact resistance	approx. 1 m $\Omega$ of contact resistance
	approx. 0.25 m $\Omega$ contact transition plug/socket

#### Connection data

Connection points	3
Total number of potentials	3

## Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
	Push-in
Nominal cross-section	1.5 mm <sup>2</sup> / 16 AWG
Solid conductor	0.25 1.5 mm <sup>2</sup> / 22 16 AWG
Solid conductor; push-in termination	0.75 1.5 mm² / 20 16 AWG
Stranded conductor	0.25 1 mm² / 22 18 AWG
Fine-stranded conductor	0.25 1.5 mm² / 22 16 AWG
Fine-stranded conductor; with insulated ferrule	0.25 0.75 mm² / 22 20 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 0.75 mm² / 22 20 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG
Strip length	9 mm / 0.35 inches
Pole number	3
Conductor entry direction to mating direction	0°

# Physical data

Pin spacing	4.4 mm / 0.173 inches
Width	24.2 mm / 0.953 inches
Height	16 mm / 0.63 inches

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/890-783



Depth 39.85 mm / 1.569 inches

## **Mechanical Data**

CodingBVariable codingNoMarking12 3Potential marking12 3Mating force of a plug-in connectionapprox. 20 70 N (depending on pole number)Retention force of a plug-in connectionLocked: > 80 NUnmating force of a plug-in connectionUnlocked: approx. 20 70 N (depending on pole number)Number of mating cycles200, without resistive loadHousing sheet thickness0.5 2 mm / 0.02 0.079 inchesMounting typeSnap-in flangeProtection typeIP40	Application	Control technology
Marking 123  Potential marking 123  Mating force of a plug-in connection approx. 20 70 N (depending on pole number)  Retention force of a plug-in connection Locked: > 80 N  Unmating force of a plug-in connection Unlocked: approx. 20 70 N (depending on pole number)  Number of mating cycles 200, without resistive load  Housing sheet thickness 0.5 2 mm / 0.02 0.079 inches  Mounting type Snap-in flange	Coding	В
Potential marking 123  Mating force of a plug-in connection approx. 20 70 N (depending on pole number)  Retention force of a plug-in connection Locked: > 80 N  Unmating force of a plug-in connection Unlocked: approx. 20 70 N (depending on pole number)  Number of mating cycles 200, without resistive load  Housing sheet thickness 0.5 2 mm / 0.02 0.079 inches  Mounting type Snap-in flange	Variable coding	No
Mating force of a plug-in connection approx. 20 70 N (depending on pole number)  Retention force of a plug-in connection Locked: > 80 N  Unmating force of a plug-in connection Unlocked: approx. 20 70 N (depending on pole number)  Number of mating cycles 200, without resistive load  Housing sheet thickness 0.5 2 mm / 0.02 0.079 inches  Mounting type Snap-in flange	Marking	123
Retention force of a plug-in connection  Unmating force of a plug-in connection  Unlocked: approx. 20 70 N (depending on pole number)  Number of mating cycles  200, without resistive load  Housing sheet thickness  0.5 2 mm / 0.02 0.079 inches  Mounting type  Snap-in flange	Potential marking	123
Unmating force of a plug-in connection  Number of mating cycles  200, without resistive load  Housing sheet thickness  0.5 2 mm / 0.02 0.079 inches  Mounting type  Snap-in flange	Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Number of mating cycles200, without resistive loadHousing sheet thickness0.5 2 mm / 0.02 0.079 inchesMounting typeSnap-in flange	Retention force of a plug-in connection	Locked: > 80 N
Housing sheet thickness 0.5 2 mm / 0.02 0.079 inches  Mounting type Snap-in flange	Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Mounting type Snap-in flange	Number of mating cycles	200, without resistive load
	Housing sheet thickness	0.5 2 mm / 0.02 0.079 inches
Protection type IP40	Mounting type	Snap-in flange
	Protection type	IP40

# Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	yes
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

# **Material Data**

Note (material data)

Information on material specifications can be found here

Color pink

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/890-783



Cover color	gray
Material group	l
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.044 MJ
Weight	6 g

# **Environmental requirements**

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

#### Commercial data

Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-02
eCl@ss 9.0	27-44-06-02
ETIM 8.0	EC002566
ETIM 7.0	EC002566
PU (SPU)	50 (50) pcs
Packaging type	box
Country of origin	PL
GTIN	4055143427746
Customs tariff number	85366990990

# **Environmental Product Compliance**

RoHS Compliance Status	Compliant,No Exemption

# Approvals / Certificates

#### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CB DEKRA Certification B.V.	IEC 61984	NL-64351
	DENKA CERUIICAUON B.V.		
	СВ	EN 61984	71-112993

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/890-783





DEKRA Certification B.V.

ام	ID	
CL	JRus	

UL 1977

E45171



Underwriters Laboratories Inc.



KEMA/KEUR DEKRA Certification B.V. 2148952.04

## Declarations of conformity and manufacturer's declarations

			Certificate
Logo	Approval	Additional Approval Text	name
	EU-Declaration of Conformity	-	-
$C\epsilon$	WAGO GmbH & Co. KG		
1 11/	✓ UK-Declaration of Conformity	-	-
UK	WAGO GmbH & Co. KG		
$\subseteq F$			

EN 60320

#### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
DNV ONVCOMAF	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
DA COLOR	<b>LR</b> Lloyds Register	EN 61535	08/20047 (E2)

# Counterpart

Item no.891-8993/005-107

pre-assembled interconnecting cable; Socket/plug; 3-pole; Cod. B; 1 m; 1,00 mm²; pink

www.wago.com/891-8993/005-107



Item no.890-293

Plug; 3-pole; Cod. B; 1,50 mm<sup>2</sup>; pink

www.wago.com/890-293

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/890-783





Item no.891-8993/205-107

pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. B; 1 m; 1,00 mm²; pink

www.wago.com/891-8993/205-107

## Optional accessories

С	О	٧	е	r

Cover



Item no.: 890-643

Lockout cap; 3-pole; for cutouts; Plastic; black

www.wago.com/890-643



Item no.: 890-693

Lockout cap; 3-pole; for cutouts; Plastic; white

www.wago.com/890-693

Tool

Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719



Item no.: 890-383

Operating tool; 3-way; green

www.wago.com/890-383

# Downloads Documentation

#### **Bid Text**

890-783 X81 - Datei	2019 Feb 19	xml 3.0 kB	Download
890-783 doc - Datei	2015 Jun 8	doc 23.6 kB	Download

#### CAD/CAE-Data

## CAE data

ZUKEN Portal 890-783	URL	Download
WSCAD Universe 890-783	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/890-783



EPLAN Data Portal 890-783 URL Download

**CAD** data

2D/3D Models 890-783 URL Download


## **Environmental Product Compliance**

#### Compliance Search


Environmental Product Compliance 890-783 Snap-in socket; 3-pole; Cod. B; 1,50 mm²; pink URL Download

#### Installation Notes

#### Conductor termination



- 1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm

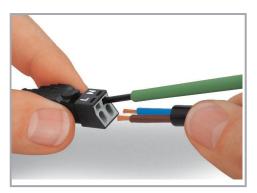

To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop.

Terminate solid conductors by simply pushing them in.


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com


www.wago.com/890-783



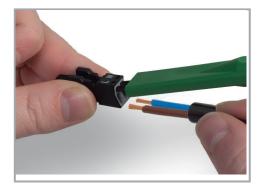

To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop.


Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop.

Terminate solid conductors by simply pushing them in.

#### Mismating protection



B-coded connectors with different colors can be plugged together.

#### Important note:

Different colors and/or pole markings are used for circuit identification.

Only connectors of the same color and same pole marking must be plugged together.



B-coded connectors (shown in gray) not only differ in color, but also in their design, making them incompatible with other coded connectors.


Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/890-783



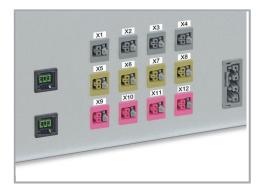

# **Product family**

WINSTA® MINI
Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com