


High Efficiency Thyristor

V_{RRM} = 1200 V
 I_{TAV} = 50 A
 V_T = 1,04 V

AC Controlling
1~ full-controlled


Part number

CLA110MB1200NA

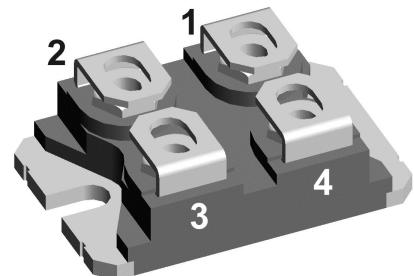

Backside: Isolated

E72873

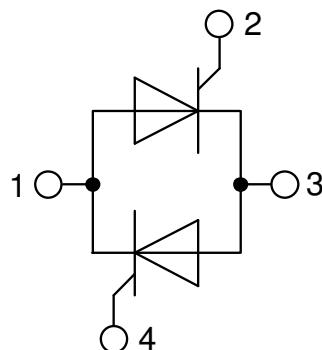

Features / Advantages:

- AC controller for line frequency
- Planar passivated chip
- Long-term stability of blocking currents and voltages

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: SOT-227B (minibloc)

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Terms .Conditions of usage:


The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact the sales office, which is responsible for you.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you. Should you intend to use the product in aviation, in health or live endangering or life support applications, please notify. For any such application we urgently recommend

- to perform joint risk and quality assessments;
- the conclusion of quality agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

Thyristor			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ\text{C}$			1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200 \text{ V}$ $V_{R/D} = 1200 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		50 5	μA mA
V_T	forward voltage drop	$I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$ $I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1,12 1,32 1,04 1,28	V V
I_{TAV}	average forward current	$T_C = 110^\circ\text{C}$	$T_{VJ} = 150^\circ\text{C}$		50	A
I_{RMS}	RMS forward current per phase	180° sine			110	A
V_{TO}	threshold voltage	$\left. \begin{array}{l} \text{slope resistance} \\ \end{array} \right\} \text{for power loss calculation only}$	$T_{VJ} = 150^\circ\text{C}$		0,78	V
r_T	slope resistance				4,9	$\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				0,55	K/W
R_{thCH}	thermal resistance case to heatsink				0,10	K/W
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		220	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		1,10 1,19 935 1,01	kA kA
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = 0 \text{ V}$		6,05 5,89 4,37 4,25	kA^2s kA^2s kA^2s kA^2s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$		86	pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu\text{s}$ $t_p = 300 \mu\text{s}$	$T_C = 150^\circ\text{C}$		10 1 0,5	W W W
P_{GAV}	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ\text{C}; f = 50 \text{ Hz}$ repetitive, $I_T = 150 \text{ A}$ $t_p = 200 \mu\text{s}; di_G/dt = 0,45 \text{ A}/\mu\text{s};$ $I_G = 0,45 \text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 50 \text{ A}$			150	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 150^\circ\text{C}$		1000	$\text{V}/\mu\text{s}$
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		1,5 1,6	V V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$		40 80	mA mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ\text{C}$		0,2	V
I_{GD}	gate non-trigger current				5	mA
I_L	latching current	$t_p = 10 \mu\text{s}$ $I_G = 0,45 \text{ A}; di_G/dt = 0,45 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		150	mA
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$		100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0,5 \text{ A}; di_G/dt = 0,5 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$		2	μs
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 50 \text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ\text{C}$ $di/dt = 10 \text{ A}/\mu\text{s}$ $dv/dt = 20 \text{ V}/\mu\text{s}$ $t_p = 200 \mu\text{s}$			150	μs

Package SOT-227B (minibloc)			Ratings		
Symbol	Definition	Conditions	min.	typ.	max.
		per terminal			Unit
I_{RMS}	RMS current	per terminal			150 A
T_{VJ}	virtual junction temperature		-40		150 °C
T_{op}	operation temperature		-40		125 °C
T_{stg}	storage temperature		-40		150 °C
Weight				30	g
M_D	mounting torque		1,1		1,5 Nm
M_T	terminal torque		1,1		1,5 Nm
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal	10,5	3,2	mm
$d_{Spb/Apb}$		terminal to backside	8,6	6,8	mm
V_{ISOL}	isolation voltage	t = 1 second t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000 2500	V V

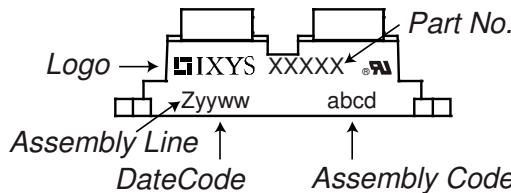Product Marking**Part description**

C = Thyristor (SCR)
 L = High Efficiency Thyristor
 A = (up to 1200V)
 110 = Current Rating [A]
 MB = 1~ full-controlled
 1200 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CLA110MB1200NA	CLA110MB1200NA	Tube	10	513128

Similar Part	Package	Voltage class
MMO90-12i06	SOT-227B (minibloc)	1200


Equivalent Circuits for Simulation

* on die level


 $T_{VJ} = 150$ °C

	Thyristor
$V_{0\max}$	threshold voltage 0,78 V
$R_{0\max}$	slope resistance * 3 mΩ

Outlines SOT-227B (minibloc)

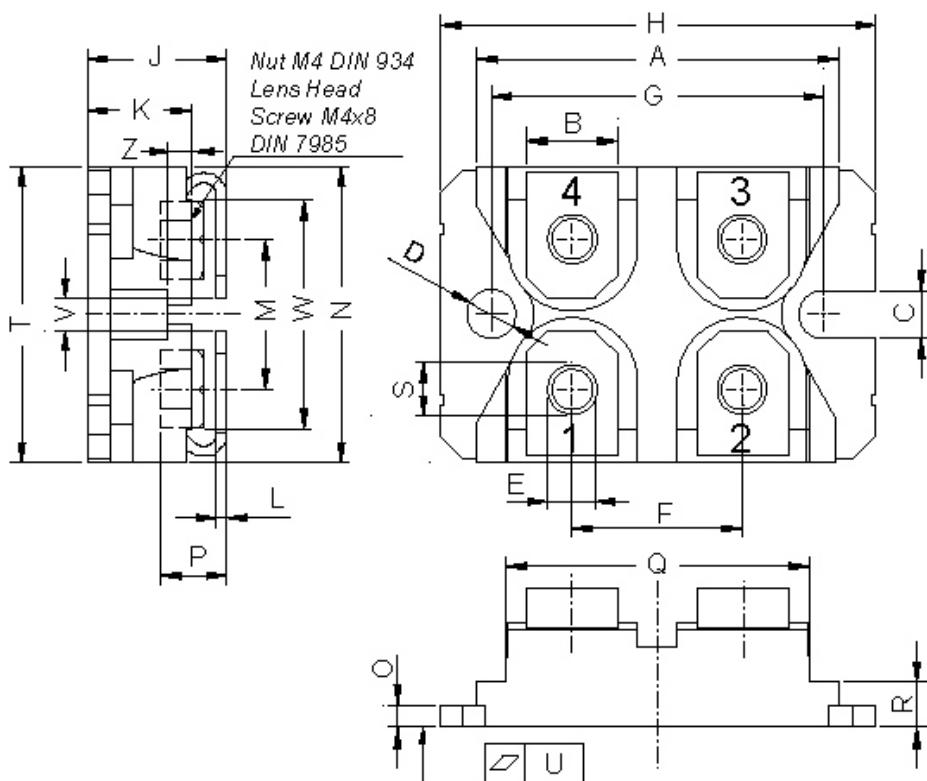

Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

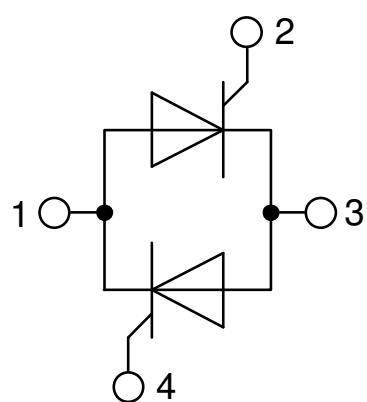

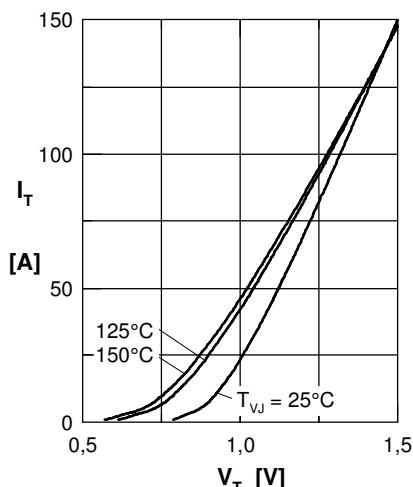
Thyristor

Fig. 1 Forward characteristics

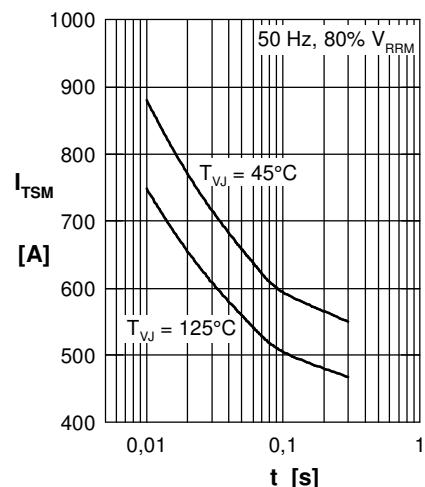


Fig. 2 Surge overload current

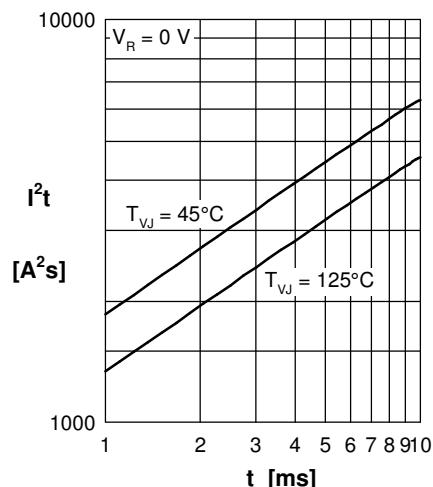
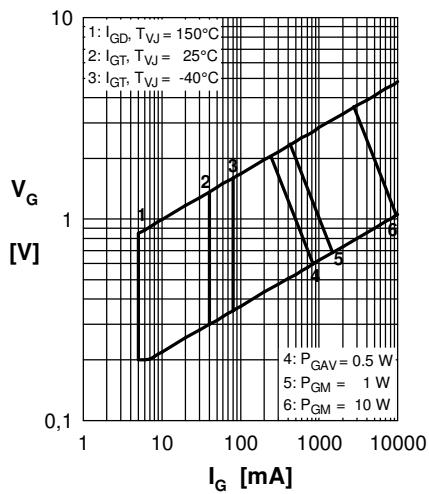
Fig. 3 I^2t versus time (1-10 ms)

Fig. 4 Gate trigger characteristics

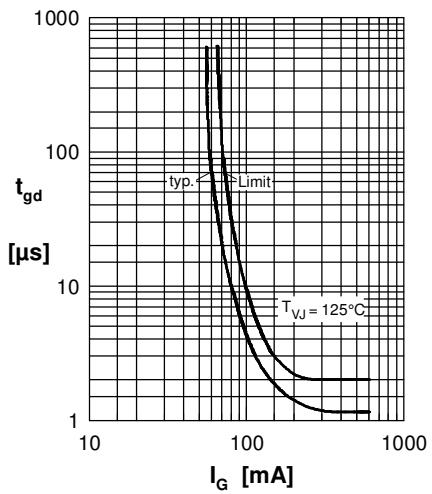


Fig. 5 Gate controlled delay time

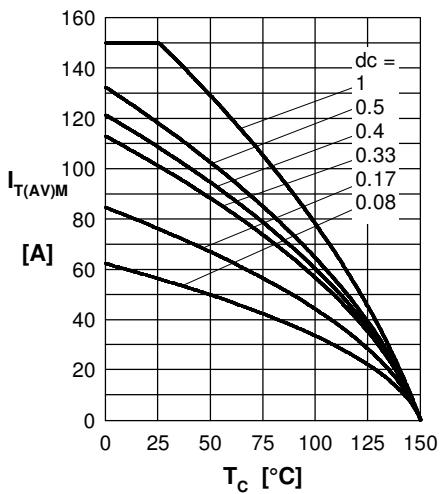


Fig. 6 Max. forward current at case temperature

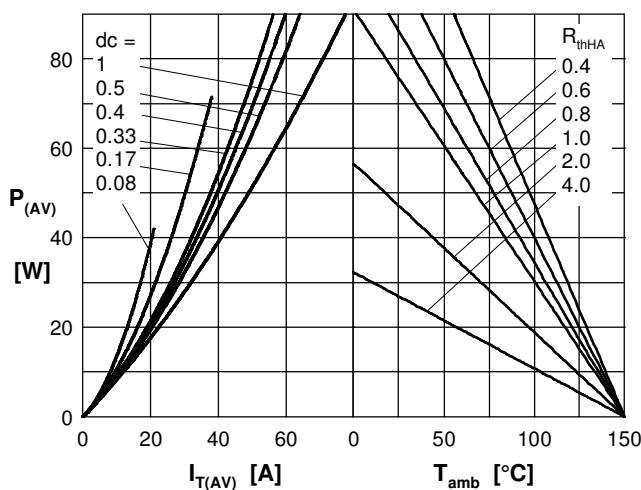
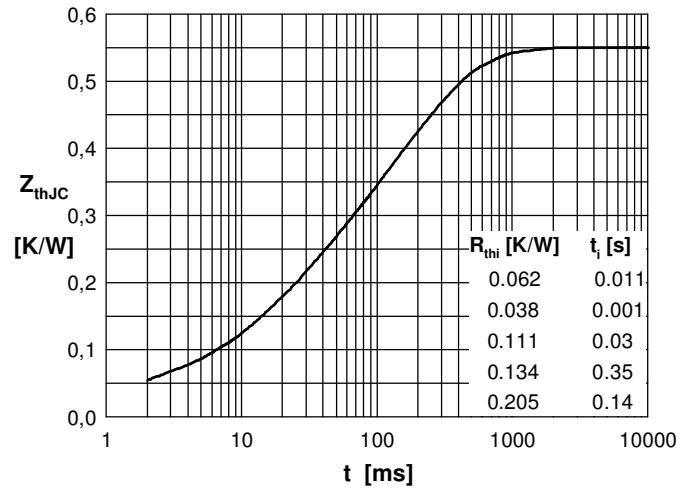
Fig. 7a Power dissipation versus direct output current
Fig. 7b ambient temperature

Fig. 8 Transient thermal impedance junction to case