

Snap-in plug; 3-pole; Cod. A; 4,00 mm<sup>2</sup>; black

www.wago.com/770-713





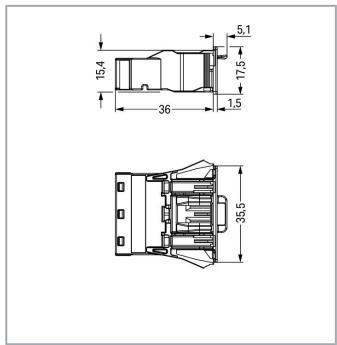

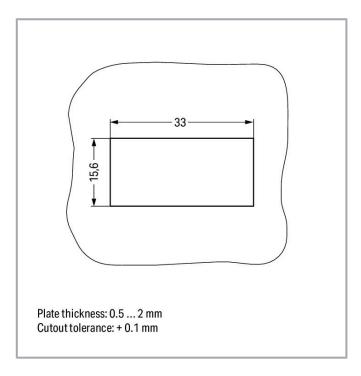

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-713



# Item description

### Male connector/plug WINSTA® MIDI 3-pole

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI male connector/plug rated current 25 A. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in seconds. For greater security in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismating. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). The WINSTA® MIDI pluggable installation connector with A coding in white or black is normally used for general mains applications in power distribution. Important parameters in the selection of a pluggable installation connector are the rated current and voltage: They tell us about the product's domains of use. This product has a current rating of 25 A – therefore it is suitable for high power loads. The WINSTA® MIDI Pluggable Connection System with Pushin CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Thanks to the included test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs.

#### Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Use of this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Choose quality and durability – the *WINSTA®* MIDI pluggable installation connector with marking from WAGO makes the installation of electrical components noticeably easier.

- protection against mismating eliminates errors
- for automation controllers
- with A coding for a great number of uses
- ready for immediate use
- quick replacement of defective units during ongoing operation

#### Data

### Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	25 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-713



Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

# Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

### General

Note on contact resistance	approx. 1 m $\Omega$ of contact resistance
	approx. 0.25 m $\Omega$ contact transition plug/socket

### Connection data

Connection points	6
Total number of potentials	3
PE function	Preceding PE contact

# **Connection 1**

Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
	Push-in
Nominal cross-section	4 mm <sup>2</sup> / 12 AWG
Solid conductor	0.5 4 mm² / 20 12 AWG
Solid conductor; push-in termination	1.5 4 mm² / 16 12 AWG
Stranded conductor	0.5 2.5 mm² / 20 14 AWG
Fine-stranded conductor	0.5 4 mm² / 20 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 1.5 mm² / 20 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.25 2.5 mm² / 20 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG
Strip length	9 mm / 0.35 inches
Pole number	3
Conductor entry direction to mating direction	0°

# Physical data

Pin spacing	10 mm / 0.394 inches	
-------------	----------------------	--

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-713



Width	35.5 mm / 1.398 inches
Height	17.5 mm / 0.689 inches
Depth	41.1 mm / 1.618 inches

### **Mechanical Data**

Application	General mains applications
Coding	A
Variable coding	Yes
Marking	$N \downarrow L$
Potential marking	N <del>↓</del> L
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Housing sheet thickness	0.5 2 mm / 0.02 0.079 inches
Mounting type	Snap-in flange
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

# Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	yes
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

### **Material Data**

Note (material data)

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-713



### Information on material specifications can be found here

Color	black
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.281 MJ
Weight	12.2 g

# **Environmental requirements**

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

20 (Winsta)
27-44-06-02
27-44-06-02
EC002566
EC002566
100 pcs
box
DE
4044918254199
85366990990

# **Environmental Product Compliance**

RoHS Compliance Status Compliant, No Exemption

# Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA	EN 61535	71-
	DEKRA Certification B.V.		123228

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?





	CCA DEKRA Certification B.V.	IEC 61535	NL -84761
c <b>FLL</b> us	cURus Underwriters Laboratories Inc.	UL 1977	E45171
Declarations	of conformity and manufacturer's declarations		
			Certificate
Logo	Approval	Additional Approval Text	name
CE	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
Approvals for	marine applications		
			Certificate
Logo	Approval	Additional Approval Text	name
ABS.	ABS American Bureau of Shipping	-	19- HG1868589- PDA
DNV DNV.COM/AF	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6

### Counterpart

LR

Lloyds Register



IEC 61984

### $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

LR22429487TA

www.wago.com/770-713





Item no.770-203

Socket; 3-pole; Cod. A; 4,00 mm²; black

www.wago.com/770-203

Item no.771-9993/006-101

pre-assembled interconnecting cable; Eca; Socket/plug; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

www.wago.com/771-9993

/006-101

Item no.771-9993/106-101

pre-assembled connecting cable; Eca; Socket/open-ended; 3-pole; Cod. A; H05VV-F 3G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

www.wago.com/771-9993

/106-101

Optional accessories

Cover

Cover



Item no.: 770-693

Lockout cap; 3-pole; for cutouts; Plastic; white

www.wago.com/770-693

Item no.: 770-643

Lockout cap; 3-pole; for cutouts; Plastic; black

www.wago.com/770-643



Item no.: 770-360

Lockout cap; for plugs; 5-pole; separable; yellow

www.wago.com/770-360

Coding

Coding



Item no.: 770-401

Coding pin; for plugs; Plastic; gray

www.wago.com/770-401

Tool

Operating tool



Item no.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

www.wago.com/210-719



Item no.: 770-383

Operating tool; 3-way; green

www.wago.com/770-383

**Downloads** 

**Documentation** 

**Bid Text** 

770-713

2019 Feb 19 X81 - Datei

xml

Download

3.0 kB

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-713



**URL** 

Download

770-713 2015 Jun 8 doc Download doc - Datei 23.6 kB

### CAD/CAE-Data

**CAD** data

2D/3D Models 770-713

CAE data

EPLAN Data Portal 770-713

URL Download

WSCAD Universe 770-713

URL Download

# **Environmental Product Compliance**

Compliance Search

ZUKEN Portal 770-713

Environmental Product Compliance 770-713 URL Download Snap-in plug; 3-pole; Cod. A; 4,00 mm²; black

### **Installation Notes**

Conductor termination


Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-713










- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

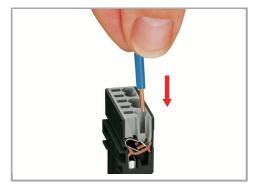






To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

#### Conductor removal

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

www.wago.com/770-713



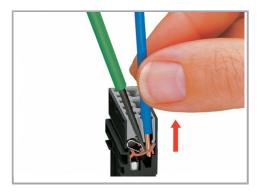

To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.



Seal unused cutout with lockout cap.

# **Product family**

WINSTA® MIDI
Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$