## **ON Semiconductor**

### Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

# **TinyLogic ULP-A Buffer with Three-State Output**

# **NC7SV126**

The NC7SV126 is a single 3–State buffer in tiny footprint packages. The device is designed to operate for  $V_{CC} = 0.9 \text{ V}$  to 3.6 V.

#### **Features**

- Designed for 0.9 V to 3.6 V V<sub>CC</sub> Operation
- 1.8 ns t<sub>PD</sub> at 3.3 V (Typ)
- Inputs/Outputs Over-Voltage Tolerant up to 3.6 V
- I<sub>OFF</sub> Supports Partial Power Down Protection
- Source/Sink 24 mA at 3.3 V
- Available in SC/SC-88A and MicroPak™ Packages
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

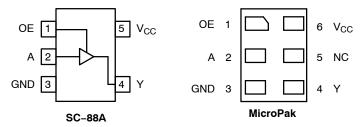


Figure 1. Pinout (Top View)



Figure 2. Logic Symbol

# ON

#### ON Semiconductor®

#### www.onsemi.com

#### MARKING DIAGRAM



SIP6 1.45 x1.0 MicroPak CASE 127EB




CC = Specific Device Code

KK = 2-Digit Lot Run Traceability Code

XY = 2-Digit Date Code

= Assembly Plant Code





SC-88A CASE 419A-02

XXX = Specific Device Code
M = Date Code
■ Pb-Free Package

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

#### PIN ASSIGNMENT

Pin	SC88A	MicroPak
1	OE	OE
2	Α	Α
3	GND	GND
4	Υ	Υ
5	V <sub>CC</sub>	NC
6	_	V <sub>CC</sub>

#### **FUNCTION TABLE**

Inp	Output		
OE	Α	Υ	
Н	L	L	
Н	Н	Н	
L	Х	Z	

X = Don't Care

#### **MAXIMUM RATINGS**

Symbol	Characteristics		Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +4.3	V
V <sub>IN</sub>	DC Input Voltage		-0.5 to +4.3	V
V <sub>OUT</sub>		-Mode (High or Low State) Tri-State Mode (Note 1) r-Down Mode (V <sub>CC</sub> = 0 V)	-0.5 to V <sub>CC</sub> + 0.5 -0.5 to +4.3 -0.5 to +4.3	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>IN</sub> < GND	-50	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>OUT</sub> < GND	-50	mA
I <sub>OUT</sub>	DC Output Source/Sink Current		±50	mA
I <sub>CC</sub> or I <sub>GND</sub>	DC Supply Current per Supply Pin or Ground Pin		±50	mA
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C
TL	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
TJ	Junction Temperature Under Bias		+150	°C
θJA	Thermal Resistance (Note 2)	SC-88A MicroPak	377 154	°C/W
P <sub>D</sub>	Power Dissipation in Still Air	SC-88A MikroPak	332 812	mW
MSL	Moisture Sensitivity		Level 1	-
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	-
V <sub>ESD</sub>	ESD Withstand Voltage (Note 3)	Human Body Model Charged Device Model	2000 1000	V
I <sub>Latchup</sub>	Latchup Performance (Note 4)	_	±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- Applicable to devices with outputs that may be tri-stated.
   Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
   HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A. (Machine Model) be discontinued.
- 4. Tested to EIA/JESD78 Class II.

#### RECOMMENDED OPERATING CONDITIONS

Symbol	Param	Min	Max	Unit	
V <sub>CC</sub>	Positive DC Supply Voltage		0.9	3.6	V
V <sub>IN</sub>	DC Input Voltage		0	3.6	٧
V <sub>OUT</sub>	DC Output Voltage	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	0 0 0	V <sub>CC</sub> 3.6 3.6	
T <sub>A</sub>	Operating Temperature Range		-40	+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Transition Rise and Fall Time	V <sub>CC</sub> = 3.3 V ±0.3 V	0	10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

#### DC ELECTRICAL CHARACTERISTICS

				т	A = 25°	С	$T_A = -40^{\circ}$	C to +85°C	
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
V <sub>IH</sub>	High-Level Input		0.9	-	0.5	-	_	_	V
	Voltage		1.1 to 1.3	0.65 x V <sub>CC</sub>	_	-	0.65 x V <sub>CC</sub>	_	1
			1.4 to 1.6	0.65 x V <sub>CC</sub>	-	-	0.65 x V <sub>CC</sub>	-	
			1.65 – 1.95	0.65 x V <sub>CC</sub>	-	-	0.65 x V <sub>CC</sub>	-	1
			2.3 to < 2.7	1.6	-	-	1.6	-	1
			2.7 to 3.6	2.0	-	-	2.0	-	
V <sub>IL</sub>	Low-Level Input		0.9	-	0.5	-	-	-	V
	Voltage		1.1 to 1.3	-	-	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	1
			1.4 to 1.6	-	_	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	1
			1.65 – 1.95	-	_	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	1
			2.3 to < 2.7	-	_	0.7	-	0.7	1
			2.7 to 3.6	-	_	0.8	_	0.8	1
V <sub>OH</sub>	High-Level Output	$V_{IN} = V_{IH}$ or $V_{IL}$							V
· · ·	Voltage	I <sub>OH</sub> = -100 μA	0.9	-	V <sub>CC</sub> - 0.1	-	-	-	
			1.1 to 3.6	V <sub>CC</sub> – 0.1	_	_	V <sub>CC</sub> - 0.1	_	1
			1.4 to 1.6	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> - 0.1	-	1
			1.65 to 1.95	V <sub>CC</sub> - 0.2	-	_	V <sub>CC</sub> - 0.2	-	1
			2.3 to < 2.7	V <sub>CC</sub> - 0.2	-	-	V <sub>CC</sub> - 0.2	-	1
			2.7 to 3.6	V <sub>CC</sub> - 0.2	_	-	V <sub>CC</sub> - 0.2	-	1
		I <sub>OH</sub> = −2 mA	1.1 o 1.3	0.75 x V <sub>CC</sub>	_	-	0.75 x V <sub>CC</sub>	_	1
		I <sub>OH</sub> = -4 mA	1.4 to 1.6	0.75 x V <sub>CC</sub>	_	-	0.75 x V <sub>CC</sub>	-	1
		I <sub>OH</sub> = -6 mA	1.65 to 1.95	1.25	_	-	1.25	_	1
			2.3 to < 2.7	2.0	_	-	2.0	_	1
		I <sub>OH</sub> = -12 mA	2.3 to < 2.7	1.8	_	_	1.8	_	1
			2.7 to 3.6	2.2	_	_	2.2	_	
		I <sub>OH</sub> = -18 mA	2.3 to < 2.7	1.7	_	_	1.7	_	1
			2.7 to 3.6	2.4	_	_	2.4	_	1
		I <sub>OH</sub> = -24 mA	2.7 to 3.6	2.2	_	_	2.2	_	
V <sub>OL</sub>	Low-Level Output	$V_{IN} = V_{IH}$ or $V_{IL}$							V
02	Voltage	I <sub>OL</sub> = 100 μA	0.9	-	0.1	_	_	_	
		,	1.1 to 3.6	-	_	0.1	_	0.1	٧
			1.4 to 1.6	-	_	0.1	_	0.1	V
			1.65 to 1.95	-	_	0.2	_	0.2	V
			2.3 to < 2.7	-	_	0.2	_	0.2	V
			2.7 to 3.6	-	_	0.2	_	0.2	V
		I <sub>OL</sub> = 2 mA	1.1 o 1.3	-	_	0.25 x V <sub>CC</sub>	_	0.25 x V <sub>CC</sub>	V
		I <sub>OL</sub> = 4 mA	1.4 to 1.6	_	_	0.25 x V <sub>CC</sub>	_	0.25 x V <sub>CC</sub>	V
		I <sub>OL</sub> = 6 mA	1.65 to 1.95	-	_	0.3	_	0.3	
		I <sub>OL</sub> = 12 mA	2.3 to < 2.7	_	-	0.4	_	0.4	
			2.7 to 3.6	-	_	0.4	-	0.4	
		I <sub>OL</sub> = 18 mA	2.3 to < 2.7	_	_	0.6	_	0.6	
			2.7 to 3.6	_	_	0.4	_	0.4	
		I <sub>OL</sub> = 24 mA	2.7 to 3.6	-	_	0.55	_	0.55	1

#### DC ELECTRICAL CHARACTERISTICS (continued)

				T <sub>A</sub> = 25°C		T <sub>A</sub> = -40°C to +85°C			
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 3.6 V or GND	0.9 to 3.6	-	-	±0.1	-	±0.5	μΑ
I <sub>OZ</sub>	3-State Output Leakage Current	V <sub>OUT</sub> = 0 V to 3.6 V	0.9 to 3.6	-	-	±0.5	-	±0.5	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	V <sub>IN</sub> = 3.6 V or V <sub>OUT</sub> = 3.6 V	0	_	-	0.5	-	0.5	μΑ
Icc	Quiescent Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND	0.9 to 3.6	-	-	0.9	-	0.9	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **AC ELECTRICAL CHARACTERISTICS**

				٦	Γ <sub>A</sub> = 25°(	2	T <sub>A</sub> = -40°C	C to +85°C	
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 M\Omega$ , $C_L = 15 pF$	0.9	-	17.6	-	-	-	ns
	A to Y (Figures 3 and 4)	$R_L = 2 \text{ k}\Omega$ , $C_L = 15 \text{ pF}$	1.10 to 1.30	-	6.3	12.6	-	14.9	
			1.40 to 1.60	-	3.8	5.3	-	5.7	
		$R_L = 500 \ \Omega, \ C_L = 30 \ pF$	1.65 to 1.95	-	3.0	4.3	-	4.6	
			2.3 to 2.7	-	2.1	2.8	-	3.0	
			2.7 to 3.6	-	1.8	2.6	-	2.8	
t <sub>PZH</sub> , t <sub>PZL</sub>		$R_1 = R_L = 1 \text{ k}\Omega$	0.9	-	19.7	-	-	-	ns
	OE to Y (Figures 3 and 4)		1.10 to 1.30	-	6.0	9.7	-	16.4	
	,		1.40 to 1.60	-	3.5	6.0	-	7.5	
			1.65 to 1.95	-	2.7	4.5	-	5.0	
			2.3 to 2.7	-	2.0	3.0	-	3.4	
			2.7 to 3.6	-	1.7	2.6	-	2.9	
$t_{PHZ}$ , $t_{PLZ}$	Output Disable Time,	C <sub>L</sub> = 30 pF	0.9	-	10.3	-	-	-	ns
	OE to Y (Figures 3 and 4)	$R_1 = R_L = 1 \text{ k}\Omega$	1.10 to 1.30	-	4.9	9.5	-	14.0	
	,		1.40 to 1.60	-	3.3	5.5	-	7.0	
			1.65 to 1.95	-	3.0	5.6	-	5.8	
			2.3 to 2.7	-	2.5	4.2	-	5.0	1
			2.7 to 3.6	-	2.9	3.9	-	4.2	

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Test Condition	Typical (T <sub>A</sub> = 25°C)	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 0 V	2.0	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = 0 V	4.5	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 5)	10 MHz, $V_{CC}$ = 0.9 to 3.6 V, $V_{IN}$ = 0 V or $V_{CC}$	20	pF

<sup>5.</sup> C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation I<sub>CC(OPR)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>in</sub> + I<sub>CC</sub>. C<sub>PD</sub> is used to determine the no–load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> • V<sub>CC</sub><sup>2</sup> • f<sub>in</sub> + I<sub>CC</sub> • V<sub>CC</sub>.




Test	Switch Position
t <sub>PLH</sub> / t <sub>PHL</sub>	Open
t <sub>PLZ</sub> / t <sub>PZL</sub>	2 x V <sub>CC</sub>
t <sub>PHZ</sub> / t <sub>PZH</sub>	GND

C<sub>L</sub> includes probe and jig capacitance

 $R_T$  is  $Z_{OUT}$  of pulse generator (typically 50  $\Omega$ ) f=1 MHz

Figure 3. Test Circuit

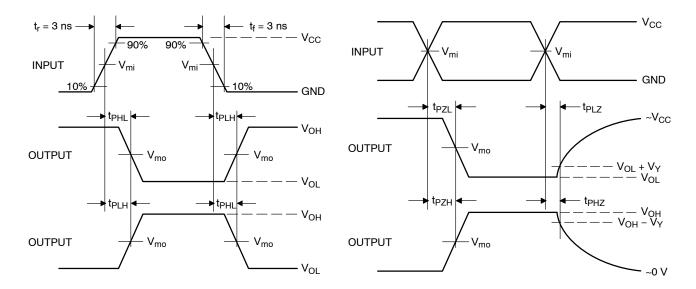

		,		
V <sub>CC</sub> , V	V <sub>mi</sub> , V	t <sub>PLH</sub> , t <sub>PHL</sub>	t <sub>PZL</sub> , t <sub>PLZ</sub> , t <sub>PZH</sub> , t <sub>PHZ</sub>	V <sub>Y</sub> , V
0.9	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.1 to 1.3	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.4 to 1.6	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.65 to 1.95	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
2.3 to 2.7	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
3.0 to 3.6	1.5	1.5	1.5	0.3

Figure 4. Switching Waveforms


#### **ORDERING INFORMATION**

Device	Package	Marking	Pin 1 Orientation (See below)	Shipping <sup>†</sup>
NC7SV126P5X	SC-88A	V26	Q4	3000 / Tape & Reel
NC7SV126L6X	MicroPak	H7	Q4	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


#### Pin 1 Orientation in Tape and Reel

#### Direction of Feed



#### **PACKAGE DIMENSIONS**

SIP6 1.45X1.0 CASE 127EB ISSUE O

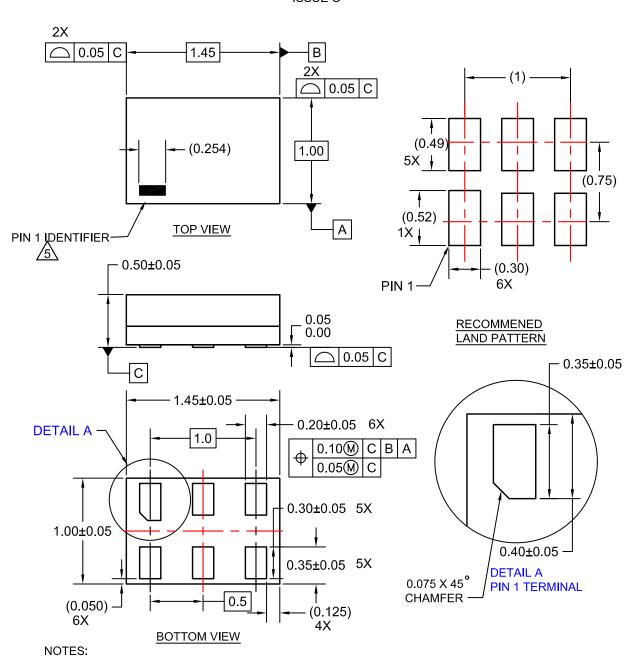



- 1, CONFORMS TO JEDEC STANDARD MO-252 VARIATION UAAD
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-2009 4. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY

OTHER LINE IN THE MARK CODE LAYOUT.

#### PACKAGE DIMENSIONS

#### SC-88A (SC-70-5/SOT-353) CASE 419A-02 **ISSUE L**





STYLE 7:

PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR

5. COLLECTOR

STYLE 6:

PIN 1. EMITTER 2 2. BASE 2 3. EMITTER 1 4. COLLECTOR

5. COLLECTOR 2/BASE 1

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. 419A-01 OBSOLETE. NEW STANDARD
- 419A-02.

  4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.071	0.087	1.80	2.20	
В	0.045	0.053	1.15	1.35	
С	0.031	0.043	0.80	1.10	
D	0.004	0.012	0.10	0.30	
G	0.026	BSC	0.65 BSC		
Н		0.004		0.10	
J	0.004	0.010	0.10	0.25	
K	0.004	0.012	0.10	0.30	
N	0.008	REF	0.20	REF	
S	0.079	0.087	2.00	2.20	

#### **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

= Date Code

= Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE 1	PIN 1. SOURCE 1	PIN 1. CATHODE
2. EMITTER	2. EMITTER	2. N/C	2. DRAIN 1/2	<ol><li>COMMON ANODE</li></ol>
3. BASE	3. BASE	3. ANODE 2	<ol><li>SOURCE 1</li></ol>	<ol><li>CATHODE 2</li></ol>
<ol><li>COLLECTOR</li></ol>	4. COLLECTOR	<ol><li>CATHODE 2</li></ol>	4. GATE 1	<ol><li>CATHODE 3</li></ol>
<ol><li>COLLECTOR</li></ol>	5. CATHODE	<ol><li>CATHODE 1</li></ol>	5. GATE 2	<ol><li>CATHODE 4</li></ol>

PIN 1. CATHODE 2. COLLECTOR 3. N/C 4. BASE

5. EMITTER

STYLE 8:

STYLE 9:

PIN 1. ANODE 2. CATHODE 3. ANODE 4. ANODE 5. ANODE

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor newsers on warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemn

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative