
PHOTONIC DETECTORS INC.

Silicon Photodiode, Blue Enhanced Photovoltaic (OP913WSL Industry Equivalent) Type PDB-V119



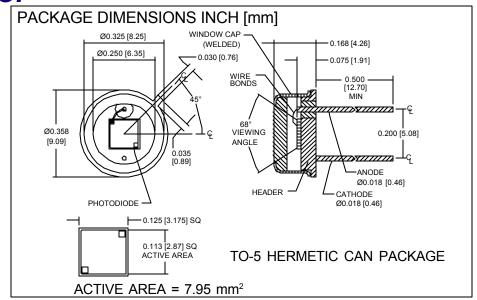

FEATURES

- · Wide view angle
- Low noise
- Large active area
- High shunt resistance

DESCRIPTION

The **PDB-V119** is a silicon, PIN planar diffused, blue enhanced photodiode. Ideal for low noise photovoltaic applications. Packaged in a hermetic TO-5 metal can with a glass window cap.

APPLICATIONS


- Bar code detector
- Encoder sensor
- Laser detection
- Instrumentation

ABSOLUTE MAXIMUM RATING (TA=25°C unless otherwise noted)

| SYMBOL | PARAMETER | MIN | MAX | UNITS |
|------------------|-----------------------------|-----|------|-------|
| V _{BR} | Reverse Voltage | | 75 | V |
| T _{STG} | Storage Temperature | -55 | +150 | ∘C |
| To | Operating Temperature Range | -40 | +125 | ∘C |
| Ts | Soldering Temperature* | | +240 | ∘C |
| ١ _L | Light Current | | 500 | mA |

^{*1/16} inch from case for 3 secs max

SPECTRALRESPONSE



ELECTRO-OPTICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

| | _ | | | / | | |
|--------------------|----------------------------|------------------------------|-----|---------------------|------|---------|
| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
| Isc | Short Circuit Current | H = 100 fc, 2850 K | 60 | 80 | | μ A |
| ΙD | Dark Current | $H = 0, V_R = 10 \text{ mV}$ | | 10 | 50 | nA |
| Rsh | Shunt Resistance | $H = 0, V_R = 10 \text{ mV}$ | .2 | 1 | | GΩ |
| TC R _{SH} | RSH Temp. Coefficient | $H = 0, V_R = 10 \text{ mV}$ | | -8 | | % / ℃ |
| CJ | Junction Capacitance | $H = 0, V_R = 0 V^{**}$ | | 800 | 1000 | рF |
| λrange | Spectral Application Range | Spot Scan | 350 | | 1100 | nm |
| λр | Spectral Response - Peak | Spot Scan | | 950 | | nm |
| V _{BR} | Breakdown Voltage | I = 10 μA | 5 | 10 | | V |
| NEP | Noise Equivalent Power | V _R = 10 V @ Peak | | 5x10 ⁻¹⁴ | | W/ √ Hz |
| tr | Response Time | RL = $1 K\Omega V_D = 0 V$ | | 750 | | nS |

Information in this technical data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.**f=1MHz